


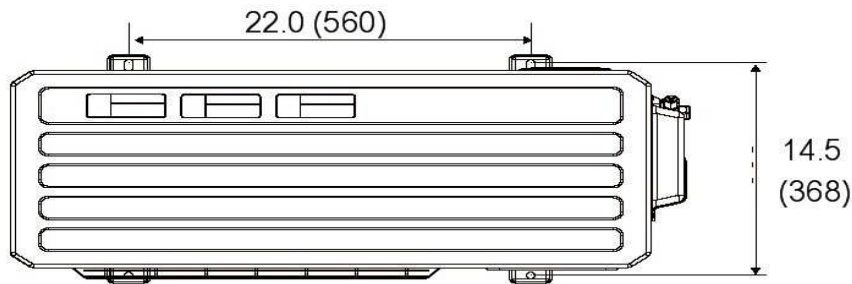
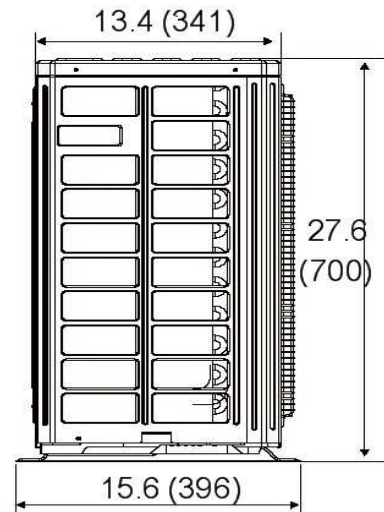
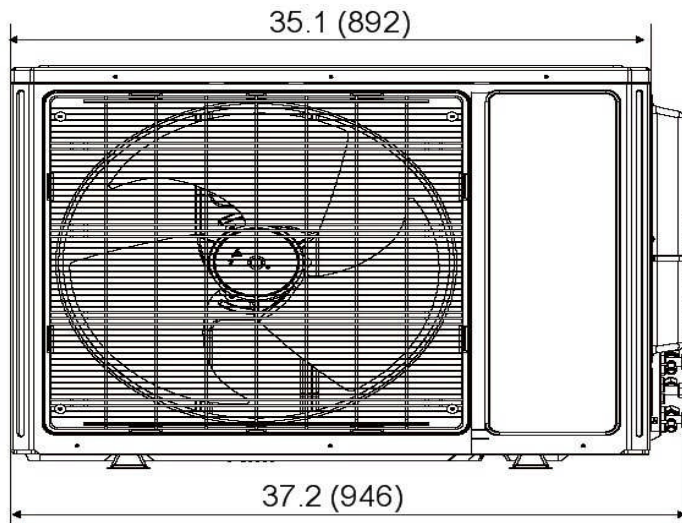
<b>Submittal Data: MULTI30HP230V1AO</b>		30,000 BTU/H Wall Mounted Heat- Pump System												
Job Name	Location	Date												
Purchaser	Engineer													
Submitted To	For <input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction													
Unit Designation	Schedule No.													
<b>GENERAL FEATURES</b> <ul style="list-style-type: none"> <li>-Up to 4 Indoor Units Comfort (4-Port)</li> <li>-G10 DC Inverter Technology</li> <li>-Quiet Operation - Both Indoor &amp; Outdoor</li> <li>-Wireless Remote Controller</li> <li>-Optional Wired Remote Controller</li> <li>-Gold Fin Coil Coating</li> <li>-Intelligent Defrost</li> <li>-Auto Restart on Power Outages</li> <li>-Limited 7 yr Compressor &amp; 5 yr Parts Warranty</li> </ul>	 <div style="border: 1px solid black; padding: 5px; margin-top: 5px; text-align: center;">AHRI Certified Ref No: 7084759</div>													
<b>System Ratings</b>														
<b>Cooling</b> <div style="display: flex; justify-content: space-between;"> <span>Rated Capacity</span> <span>29,000 BTU/H</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Capacity Range</span> <span>7,500-34,000 BTU/H</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Power Input (Max)</span> <span>3,450 W</span> </div> <div style="display: flex; justify-content: space-between;"> <span>SEER</span> <span>16</span> </div>														
<b>Heating at 47° F</b> <div style="display: flex; justify-content: space-between;"> <span>Rated Capacity</span> <span>34,000 BTU/H</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Capacity Range</span> <span>7,500-36,000 BTU/H</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Input Power (Max)</span> <span>2,850 W</span> </div> <div style="display: flex; justify-content: space-between;"> <span>HSPF</span> <span>8.2</span> </div> <div style="display: flex; justify-content: space-between;"> <span>COP</span> <span>3.1</span> </div>														
<b>Heating at 17° F</b> <div style="display: flex; justify-content: space-between;"> <span>Rated Capacity</span> <span>24,860 BTU/H</span> </div>														
<b>Operating Range</b> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">Cooling</td> <td style="width: 10%;">(Max)</td> <td style="width: 60%;">118°F (48 C)</td> </tr> <tr> <td></td> <td>(Min)</td> <td>23°F (-5 C)</td> </tr> <tr> <td>Heating</td> <td>(Max)</td> <td>80°F (27 C)</td> </tr> <tr> <td></td> <td>(Min)</td> <td>5°F (-15 C)</td> </tr> </table>			Cooling	(Max)	118°F (48 C)		(Min)	23°F (-5 C)	Heating	(Max)	80°F (27 C)		(Min)	5°F (-15 C)
Cooling	(Max)	118°F (48 C)												
	(Min)	23°F (-5 C)												
Heating	(Max)	80°F (27 C)												
	(Min)	5°F (-15 C)												
<b>Power Supply</b> <div style="display: flex; justify-content: space-between;"> <span>Normal Operational Voltage</span> <span>208/230 V, 1 Phase, 60 Hz</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Voltage Range</span> <span>187 - 253 V</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Main Power Wire Size</span> <span>8-2 AWG</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Interconnecting Cable Wire Size</span> <span>14-4 AWG</span> </div> <div style="display: flex; justify-content: space-between;"> <span>MCA</span> <span>26.0 A</span> </div> <div style="display: flex; justify-content: space-between;"> <span>MOCP/Breaker Size</span> <span>45 A</span> </div>														
<b>Outdoor Unit Data</b>														
<b>Compressor</b> Type    DC Inverter Driven Rotary <span style="float: right;">RLA    10.0 A</span>														
<b>Fan Motor</b> Output Power    60 W <span style="float: right;">FLA    0.6 A</span> <span style="float: right;">Air Flow (Max)    1,530 CFM</span>														
<b>Sound Pressure</b> <div style="display: flex; justify-content: space-between;"> <span>Cooling</span> <span>56 db(A)</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Heating</span> <span>56 db(A)</span> </div>														
<b>Dimensions &amp; Weights</b> <div style="display: flex; justify-content: space-between;"> <span>Unit Dimensions (LxHxD)</span> <span>37.2 x 27.6 x 15.6 -in</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Weight (Net/Shipping)</span> <span>137/148 LBS</span> </div>														
<div style="display: flex; justify-content: space-between;"> <span>Min. Number of Indoor Units</span> <span>2</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Max. Number of Indoor Units</span> <span>4</span> </div>														
<b>Refrigerant Piping Data</b>														
<div style="display: flex; justify-content: space-between;"> <span>Connection Method</span> <span>Flared</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Refrigerant Type</span> <span>R410A</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Factory Charge for Total Line Length</span> <span>130-ft</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Additional Charge Per Line Length</span> <span>0.2-oz/ft</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Total Refrigerant Pipe Length</span> <span>230-ft</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Max Refrigerant Piping Length to any Indoor Unit</span> <span>66-ft</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Min Refrigerant Piping Length to any Indoor Unit</span> <span>10-ft</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Max Elevation between Indoor Units</span> <span>33-ft</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Max Lift from Outdoor to Indoor Unit</span> <span>33-ft</span> </div> <div style="display: flex; justify-content: space-between;"> <span>Max Drop from Outdoor to Indoor Unit</span> <span>33-ft</span> </div>														



Units: inch (mm)

**36,000 BTUH MODEL**

Model # MULTI30HP230V1AO 30,000 BTUH 230V



**Suction/Gas Line Port Size**



Port #1	3/8-in OD Flared
Port #2	3/8-in OD Flared
Port #3	3/8-in OD Flared
Port #4	3/8-in OD Flared

**Liquid Line Port Size**

Port #1	1/4-in OD Flared
Port #2	1/4-in OD Flared
Port #3	1/4-in OD Flared
Port #4	1/4-in OD Flared

**MINIMUM SPACING REQUIREMENTS**

Units: inch (mm)

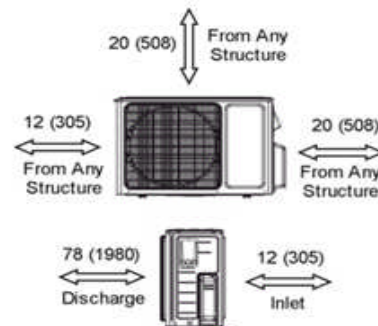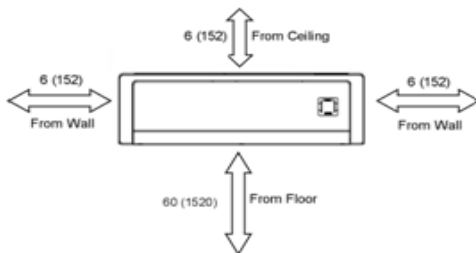

**Notes:**

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.





[www.greecomfort.com](http://www.greecomfort.com)

Units: inch (mm)

**9,000 AND 12,000 BTUH MODELS**

Model # NEO09HP230VAA-H or GWH09MB-D3DNA3D/I 9,000 BTUH 230V

Model # NEO12HP230VAA-H or GWH12MB-D3DNA3D/I 12,000 BTUH 230V

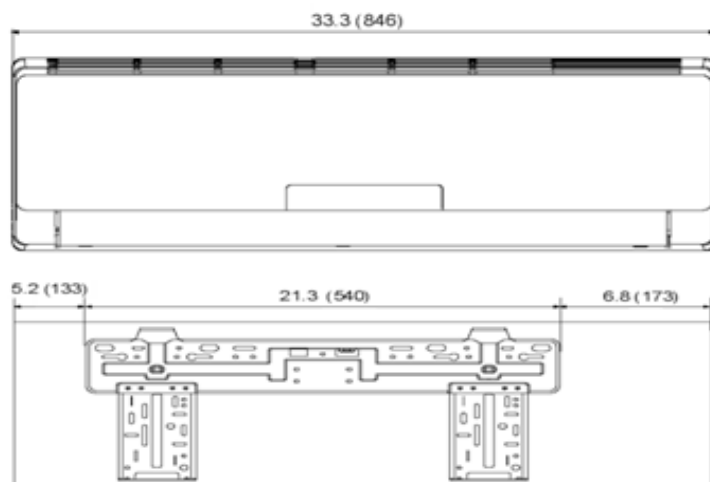**neo**

Liquid Line Valve	1/4-in OD Flared
Suction/Gas Line Valve	3/8-in OD Flared
Drain Connector	5/8-in OD



*Note: Size Refrigerant lines based on evaporator port sizes.*

Indoor Capacity Size	Fan (watts)	CFM (High)	Sound Power (Low/High)**
9,000 BTUH	20	330	26/41
12,000 BTUH	20	341	28/42

Units: inch (mm)

**18,000 BTUH MODEL**

Model # NEO18HP230VAA-H or GWH18MC-D3DNA3D/I 18,000 BTUH 230V

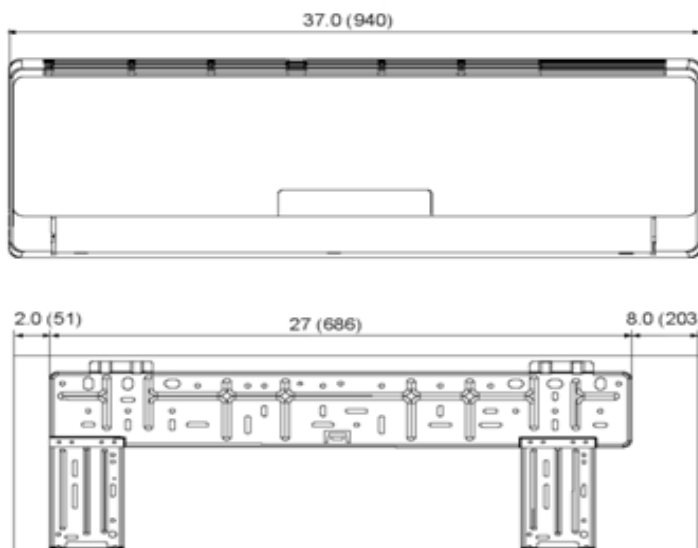

Liquid Line Valve	1/4-in OD Flared
Suction/Gas Line Valve	1/2-in OD Flared
Drain Connector	5/8-in OD

*Note: Size Refrigerant lines based on evaporator port sizes.*

Indoor Capacity Size	Fan (watts)	CFM (High)	Sound Power (Low/High)**
18,000 BTUH	20	500	35/46

\*\*Sound Power ratings are per AHRI 270 and AHRI 350

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.



**GREE**  
Change for Life  
[www.greecomfort.com](http://www.greecomfort.com)

Units: inch (mm)

**9,000 AND 12,000 BTUH MODELS**

Model # GWH09AB-D3DNA2D/I 9,000 BTUH 230V

Model # GWH12AB-D3DNA2D/I 12,000 BTUH 230V

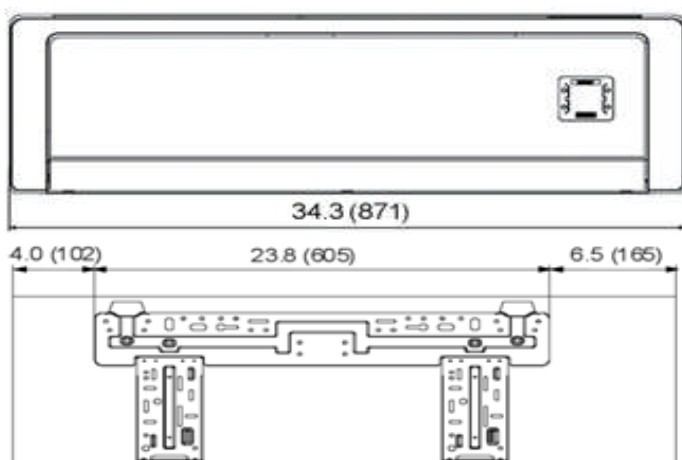**evō+**

Liquid Line Valve	1/4-in OD Flared
Suction/Gas Line Valve	1/2-in OD Flared
Drain Connector	5/8-in OD



*Note: Size Refrigerant lines based on evaporator port sizes.*

Indoor Capacity Size	Fan (watts)	CFM (High)	Sound Power (Low/High)**
9,000 BTUH	10	341	28/46
12,000 BTUH	10	353	28/46

Units: inch (mm)

**18,000 BTUH MODEL**

Model # GWH18AC-D3DNA2D/I 18,000 BTUH 230V

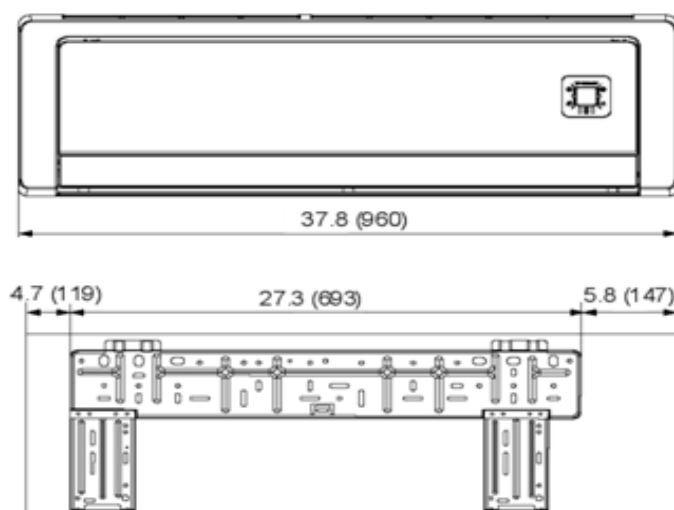

Liquid Line Valve	1/4-in OD Flared
Suction/Gas Line Valve	1/2-in OD Flared
Drain Connector	5/8-in OD

*Note: Size Refrigerant lines based on evaporator port sizes.*

Indoor Capacity Size	Fan (watts)	CFM (High)	Sound Power (Low/High)**
18,000 BTUH	20	488	35/46

\*\*Sound Power ratings are per AHRI 270 and AHRI 350

**GREE**  
Change for Life

[www.greecomfort.com](http://www.greecomfort.com)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

**COOLING CAPACITY (BTUH)**

Indoor Units Combinations	Rated System Capacity (BtuH)	Capacity Rating (Min.~Max.) BtuH	Indoor Unit A (BtuH)	Indoor Unit B (BtuH)	Indoor Unit C (BtuH)	Indoor Unit D (BtuH)
9K+9K	18,000	6,824~26,600	9,000	9,000		
9K+12K	21,000	7,165~27,300	9,000	12,000		
12K+12K	24,000	7,200~30,000	12,000	12,000		
9K+18K	25,000	7,300~32,000	8,400	16,600		
12K+18K	25,500	7,400~32,500	10,000	15,000		
18K+18K	26,000	7,500~32,500	12,750	12,750		
9K+9K+9K	26,000	7,500~34,000	8,667	8,667	8,667	
9K+9K+12K	26,000	7,500~34,000	8,000	8,000	10,000	
9K+12K+12K	26,000	7,500~34,000	6,000	10,000	10,000	
9K+9K+18K	26,000	7,500~34,000	7,000	7,000	12,000	
12K+12K+12K	26,000	7,500~34,000	8,667	8,667	8,667	
9K+12K+18K	27,000	7,500~34,000	6,800	7,200	13,000	
12K+12K+18K	28,000	7,500~34,000	6,500	6,500	15,000	
9K+9K+9K+9K	29,000	7,500~34,000	7,250	7,250	7,250	7,250
9K+9K+9K+12K	29,000	7,500~34,000	7,000	7,000	7,000	8,000
9K+9K+12K+12K	29,000	7,500~34,000	6,800	6,800	7,700	7,700

**HEATING CAPACITY (BTUH)**

Indoor Units Combinations	Rated System Capacity (BtuH)	Capacity Rating (Min.~Max.) BtuH	Indoor Unit A (BtuH)	Indoor Unit B (BtuH)	Indoor Unit C (BtuH)	Indoor Unit D (BtuH)
9K+9K	19,000	7,100~33,000	9,500	9,500		
9K+12K	22,500	7,100~33,500	9,500	13,000		
12K+12K	26,000	7,200~34,000	13,000	13,000		
9K+18K	27,000	7,300~34,000	9,000	18,000		
12K+18K	28,000	7,400~34,000	11,200	16,800		
18K+18K	28,500	7,400~34,400	14,250	14,250		
9K+9K+9K	29,000	7,500~35,000	9,667	9,667	9,667	
9K+9K+12K	29,000	7,600~35,000	9,000	9,000	11,000	
9K+12K+12K	29,000	7,600~35,000	6,000	11,500	11,500	
9K+9K+18K	29,000	7,600~35,000	6,000	6,000	17,000	
12K+12K+12K	29,000	7,600~35,000	9,667	9,667	9,667	
9K+12K+18K	29,000	7,600~35,000	6,802	9,308	12,888	
12K+12K+18K	29,000	7,600~35,000	8,567	8,567	11,862	
9K+9K+9K+9K	30,500	7,600~36,000	7,625	7,625	7,625	7,625
9K+9K+9K+12K	30,500	7,600~36,000	7,100	7,100	7,100	9,200
9K+9K+12K+12K	31,000	7,600~36,000	6,500	6,500	9,000	9,000

Capacity data is based on the following conditions :

Cooling Nominal Test Conditions Heating Nominal Test Conditions

Indoor: 80°F DB/67°F WB

Indoor: 70°F DB/60°F WB

Outdoor: 95°F DB/75°F WB

Outdoor: 47°F DB/43°F W



[www.greecomfort.com](http://www.greecomfort.com)

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

## COOLING PERFORMANCE

Outdoor Ambient Temperature (DB)	Indoor Entering Air Temperatures (DB) 50% RH					
	62 F		67 F		72 F	
	TC	SHC	TC	SHC	TC	SHC
25 F	35,679	26,492	38,564	27,920	41,224	29,681
35 F	34,867	26,460	37,132	27,106	38,935	28,150
45 F	33,144	25,454	35,444	26,300	37,976	27,532
55 F	31,909	24,697	34,026	25,519	36,476	26,628
65 F	30,821	23,948	33,913	25,740	35,960	26,287
75 F	29,609	23,154	31,900	24,531	34,310	25,320
85 F	28,420	22,565	30,450	23,507	33,060	24,696
95 F	26,970	21,549	29,000	23,171	31,726	23,826
105 F	25,520	20,722	27,486	21,934	29,870	22,940
115 F	24,068	19,832	25,518	20,669	27,258	21,343

## HEATING PERFORMANCE

Outdoor Ambient Temperature (DB) (80% RH)	Indoor Entering Air Temperatures (DB)					
	65 F		70 F		75 F	
	TC	SHC	TC	SHC	TC	SHC
5 F	24,974	24,974	23,570	23,570	22,992	22,992
15 F	26,694	26,694	24,354	24,354	24,207	24,207
25 F	28,324	28,324	26,883	26,883	25,353	25,353
35 F	29,905	29,905	27,679	27,679	26,518	26,518
45 F	31,467	31,467	30,400	30,400	28,558	28,558
55 F	31,509	31,509	30,598	30,598	29,260	29,260
65 F	31,360	31,360	30,902	30,902	29,950	29,950

TC- Total Capacity ( BtuH)

SHC- Sensible Capacity (BtuH)