



Green Lion

FLEX Power Jumper 3 in 1 Function


SKU: GNFLXJUMP10GY Model No: GL-JX44



Table of Contents

| Product Overview | 2 |
|-----------------------------|----|
| Packing List | 2 |
| Operation Instruction | 2 |
| Charging Other Devices | 4 |
| Specification | 5 |
| FAQ | 6 |
| Troubleshooting | 7 |
| Toxic and Harmful Substance | 7 |
| Warning | 8 |
| Disposal | 10 |
| Warranty | 10 |
| Contact Us | 10 |
| | _ |

Product Overview

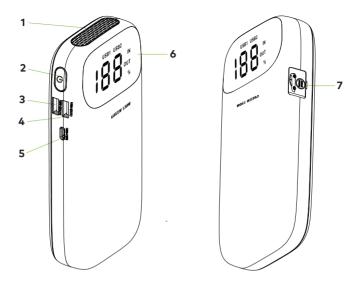

- 1. LED Light
- 2. ON/OFF Button
- 3. USB 2 Output
- 4. USB 1 Output
- 5. USB-C Input
- 6. LED Display
 - 7. EC5 Jump Start Output

Packing List

- 1. Jump Starter Unit 3. Smart Jump Cable
- 2. User Manual
- 4. Charging Cable

Operation Instruction

LED Display

Press the ON/OFF Button to detect the power level of the car jump starter. The screen shows the remaining battery power and the activated output port. Different numbers on the screen indicate different power

levels. The number will reach 100% after charging is complete. The display turns off 30 seconds after full charge.

Jump Starter Charging Instruction


Charge it before first use! Do not use the device during charging! The screen shows "IN" when charging.



Jump Start 12V Vehicle Instruction

Before starting the vehicle, please confirm that the battery power is above 80%.

- 1. Insert the jumper cable fully into the unit.
- 2. Attach the RED clamp to the positive (+) terminal of the vehicle's battery and connect the BLACK clamp to the negative (-) terminal of the vehicle's battery.
- **3.** Start the vehicle, allowing a minimum interval of 30 seconds between each attempt. If unsuccessful after three attempts, stop further attempts and inspect the vehicle's engine or circuit for potential issues.
- **4.** Once the vehicle has started successfully, promptly remove the jumper cable from the jump starter, and disconnect the red and black clamps from the vehicle's battery terminals within 30 seconds.

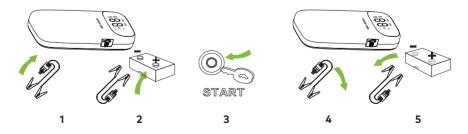


| Smart Jumper Cable Indicator | | |
|--------------------------------------|--|--|
| Indicator | Situations | |
| Flashing red and green indicator | Jumper cable connected | |
| Solid green indicator | Ready to start | |
| Solid red indicator | 1. Low voltage protection — Recharge the product 2. Over-heating protection — Remove the clamps to let it cool 3. Timeout protection — Connection timed out, Remove the clip within 30s after a successful start | |
| Solid red with discontinuous beeping | Reverse polarity protection — Reverse the clips and ensure the correct connection | |
| Solid red with continuous beeping | Short circuit protection — Don't connect the clips together or to the same metal | |



Charging Other Devices

Connect the charging cable to the USB port of the jump starter. Press the ON/OFF button to start charging. The LED display will indicate that the device is charging





LED Lamp

Press the ON/OFF button for 3 seconds to start the LED light.

There are 3 modes for the LED light that appear in order: (illumination, strobe, SOS) if you press slightly.







Specifications

| Model No. | GL-JX44 |
|--------------------|------------------------|
| Material | PC + ABS |
| Battery Capacity | 10000mAh |
| Power | 37Wh |
| Voltage | 12V |
| Current | 500-1000A |
| Gasoline Cars | 12V/6.0L |
| Diesel Cars | 12V/3.0L |
| Flashlight | 3W |
| Light Modes | Steady-Strobe-SOS |
| Working Temp | -20°C~60°C |
| Charging Port | USB-C |
| Charging Time | 5 Hrs |
| USB-C Input | 5V/2A |
| USB-A1 Output | 5V/2.4A |
| USB-A2 Output | 5V/3A, 9V/2A, 12V/1.5A |
| Product Weight | 480g |
| Product Dimensions | 180*84*36mm |



How do I turn off this appliance?

A: The appliance will automatically power off when no load is detected or when the charging is completed.

Q: What is the expected battery life for this appliance after being fully charged?

A: The battery typically lasts 3-6 months; however, we recommend recharging it every 3 months.

Q: What temperature is safe for using and storing the unit?

A: The unit works best between -20°C to 60°C (-4°F to 140°F). Avoid storing it in a hot vehicle for long periods, as temperatures above 60°C (140°F) can damage the battery and make it unsafe.

Q: How do I know if I've connected the unit to the vehicle correctly?

A: When the battery clamps are on the vehicle battery, a steady green light on the jumper cable means it's connected correctly. If only the red light is on, it's not connected correctly.

Q: Can this unit charge other devices while it is being charged?

A: No.

Q: Can this product charge other devices while starting a vehicle?

A: No



Troubleshooting

| Problem | Reason | Solution | |
|--------------------------|---|--|--|
| Unit Fails to Jump Start | Insu fficient power level. | Please keep the battery level higher than 80%. | |
| | Bad connection caused by rust or dirt on ca r's battery terminals. | Please clean the terminals and try again. | |
| | The unit activated its overheating protection due to the battery overheating. | Please try again after waiting for one minute to let the unit cool down. | |
| | The clamps are connected incorrectl y. | Please ensure the clamps are connected to the correct (+-) terminals. | |
| | Problem unrelated to the car's battery. | Please use the appropriate equipment to check the error code of the vehicle. | |
| | Jump start the car with a different voltage battery. | This unit is for vehicles (equipment) with 12V batteries only. | |
| | Device stops working and displays "H8" | Overheat protection activated. Please allow the device to cool before reuse. | |
| | Device stops working and displays "HO" | Low temperature protection activated. Please allow the device to warm up before reuse. | |

Toxic and Harmful Substance

| Composition and amount of toxic and harmful substance in jump starter | | | | |
|---|----|----|--------|-----|
| Pb | Hg | Cd | Cr(VI) | PBB |
| 0 | 0 | 0 | 0 | 0 |

| PBDE | DBP | BBP | DEHP | DIBP |
|------|-----|-----|------|------|
| 0 | О | О | О | 0 |

0: Indicates all homogeneous materials' hazardous substances content are below the MCV limit specified in the standard 65/2011/EU (RoHS) with amendment (EU)/2015 863.

Warning

- 1. This unit is for vehicles (equipment) with 12V batteries only. It may be dangerous if it is used with other types of batteries. Read and understand the safety information before using the jump starter.
- **2.** Do not try to restart the vehicle after 3 consecutive attempts as this may damage the unit. Check your vehicle for other possible reasons why it can't be restarted.
- **3.** Failure to follow the safety information may cause damage to the jump starter and may also result in electric shock, explosions, fire, property damage, and personal injury.
- **4.** This product is not a toy, and it is forbidden for children to use it; it is recommended for users over 16 years of age.
- **5.** When the product is used for the first time, charge the product for more than 3 hours.
- **6.** This product has a built-in non-removable lithium battery. It is forbidden to throw this product into a fire or throw it away at will. The lithium battery may catch fire, spontaneously ignite, and explode due to overheating, impact, or water. Please avoid exposure to the sun in the car, or exposure to high-temperature environments.
- **7.** If the product is swollen, leaking, or smells, please stop using it immediately.
- **8.** If the product has abnormal noise or high temperature during use, please stop using it and shut it down immediately.
- **9.**Please store or use it in a dry and clean environment. Avoid dampness, heavy falls, water immersion, and sand intrusion. The intrusion of sand and

dust may cause damage to the product; this product is also not waterproof, and it is forbidden to wash it in water.

- **10.** Please keep away from corrosive materials when storing this product, and the storage temperature should not be lower than -20°C (-4°F) or higher than 60°C (140°F). Too cold or too hot will shorten the life of the product and damage the built-in battery.
- 11. Please keep this product charged at least once every 3 months.
- **12.** Do not disassemble the machine by yourself, otherwise, it may cause a safety accident.





Do not dispose of discarded electrical appliances as unclassified urban waste. They should be handed over to an officially designated recycling center, which is beneficial for environmental protection.

Warranty

Products that you buy directly from our **Green Lion** website or shop come with a 24-month warranty.

When you buy **Green Lion** products from any of our approved sellers, you only get a 12-month warranty. If you want to extend this warranty, go to our website at **https://www.greenlion.net/warranty** and fill out the form with your information. Don't forget to upload a picture of the product too. After we've checked and accepted your request, we'll send you an email to confirm that your product's warranty has been extended.

For more info, please check: https://www.greenlion.net/warranty

Contact Us

If you have any questions about this Privacy Policy, please contact us at:

Website: https://www.greenlion.net/

Sales: sales@greenlion.net

Service Support: Support@greenlion.net

Telegram: @greenlion_global Instagram: @greenlion_global