



Submittal Data Sheet

VISTA (1.25 Ton 2 X 2 Flat Cassette) System

FFQ15Q2VJURX15QMVJU

FEATURES

- Intelligent eye occupancy sensor (optional)
- Hot start technology
- Auto-restart (after power failure)
- Weekly Timer (Up to 4 events per day) Comfort
- Airflow
- Quiet operation
- 2,3, or 4-way airflow pattern
- Built-in condensate pump (up to 22")
- Fresh air intake knockout
- Individual Flap Control

BENEFITS

- 12 year limited parts and compressor warranty with online registration
- 5 Year limited parts warranty for commercial applications
- Optional Sensor Panel (Occupancy Sensor, Comfort Airflow, Floor Sensor) BRYQ60A2(W/S)

INDOOR UNIT



Shown with BYFQ602W1W Decoration Panel (ships and sold separately)



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration and some of the additional requirements are not required in California or Quebec.

NOTES

- Requires P1/P2 controller (Not included)
- Requires either BYFQ60C2W1W or BYFQ602W1S Decoration Panel (ships separately)

OUTDOOR UNIT



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration and some of the additional requirements are not required in California or Quebec.



Submittal Data Sheet

VISTA (1.25 Ton 2 X 2 Flat Cassette) System

FFQ15Q2VJURX15QMVJU

SYSTEM PERFORMANCE

| | | | |
|------------------------------------|----------------|----------------------------------|---|
| Indoor Unit Model No. | FFQ15Q2VJU | Indoor Unit Name: | INV CEILING MOUNTED TYPE ID |
| Outdoor Unit Model No. | RX15QMVJU | Outdoor Unit Name: | MULTI SPLIT OD |
| Rated Cooling Capacity (Btu/hr): | 14,400 | Rated Cooling Conditions: | Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75 |
| Sensible Capacity (Btu/hr): | | Rated Piping Length(ft): | 25 |
| Max/Min Cooling Capacity (Btu/hr): | 16,200 / 5,100 | Rated Height Difference (ft): | 65.60 |
| Cooling Input Power (kW): | | Rated Heating Conditions: | Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43 |
| SEER (Non-Ducted/Ducted): | 20.70 / | HSPF (Non-Ducted/Ducted): | 11.0 / |
| EER (Non-Ducted/Ducted): | 12.50 / | Heating COP (Non-Ducted/Ducted): | 3.9 / |
| Rated Heating Capacity (Btu/hr): | 16,200 | | |
| Max/Min Heating Capacity (Btu/hr): | 16,300 / 5,200 | | |

SYSTEM DETAILS

| | | | |
|--|--------|-----------------------------------|----------|
| Refrigerant Type: | R-410A | Cooling Operation Range (°F DB): | 50 - 115 |
| Holding Refrigerant Charge (lbs): | 2.5 | Heating Operation Range (°F WB): | 5 - 64 |
| Additional Charge (lb/ft): | 0.21 | Max. Pipe Length (Vertical) (ft): | |
| Pre-charge Piping (Length) (ft): | 32 | Cooling Range w/Baffle (°F DB): | - |
| Max. Pipe Length (Total) (ft): | 98 | Heating Range w/Baffle (°F WB): | - |
| Max Height Separation (Ind to Ind ft): | 66 | | |

Submittal Data Sheet


VISTA (1.25 Ton 2 X 2 Flat Cassette) System

FFQ15Q2VJURX15QM VJU

INDOOR UNIT DETAILS

| | | | |
|---------------------------------------|---|--|-------------|
| Power Supply (V/Hz/Ph): | 208-230 / 60 / 1 | Airflow Rate (H/M/L) (CFM): | 420/367/293 |
| Power Supply Connections: | See Outdoor Unit for Electrical Specs Moisture Removal (Gal/hr): | Moisture Removal (Gal/hr): | |
| Min. Circuit Amps MCA (A): | | Gas Pipe Connection (inch): | 1/2 |
| Max Overcurrent Protection (MOP) (A): | | Liquid Pipe Connection (inch): | 1/4 |
| Dimensions (HxWxD) (in): | 10-1/4 x 22-5/8 x 22-5/8 | Condensate Connection (inch): | 1-1/32 |
| Panel (HxWxD) (in): | 1-13/16 x 24-7/16 x 24-7/16 | Sound Pressure (H/M/L) (dBA): | 40/37/31 |
| Net Weight (lb): | | Sound Power Level (dBA): | |
| Panel Weight (lb): | 6 | Ext. Static Pressure (Rated/Max) (inWg): | / |

DIMENSIONAL DRAWING - INDOOR UNIT

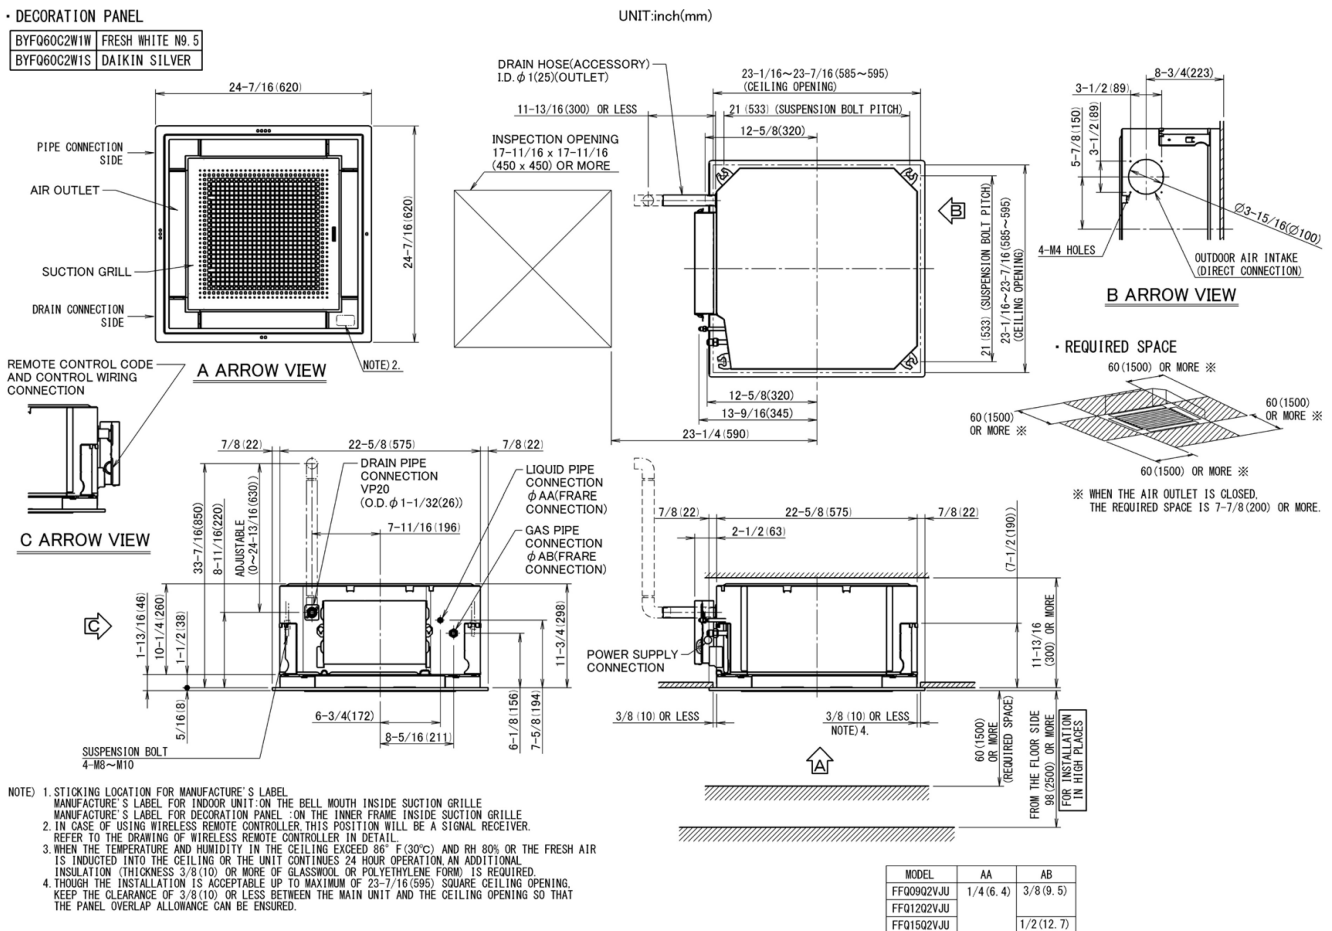

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Date: 1/19/2017 10:48:40 AM

Page 3 of 4



Submittal Data Sheet

VISTA (1.25 Ton 2 X 2 Flat Cassette) System


FFQ15Q2VJURX15QMVMJU

OUTDOOR UNIT DETAILS

| | | | |
|---------------------------------------|----------------------------|--------------------------------|----------|
| Power Supply (V/Hz/Ph): | 208-230 / 60 / 1 | Compressor Type: | Inverter |
| Power Supply Connections: | | Capacity Control Range (%): | - |
| Min. Circuit Amps MCA (A): | 9.10 | Airflow Rate (H) (CFM): | 1,896 |
| Max Overcurrent Protection (MOP) (A): | 15.00 | Gas Pipe Connection (inch): | 1/2 |
| Max Starting Current MSC(A): | 8.00 | Liquid Pipe Connection (inch): | 1/4 |
| Rated Load Amps RLA(A): | 8.0 | Sound Pressure (H) (dBA): | 50 |
| Dimensions (HxWxD) (in): | 28-15/16 x 34-1/4 x 12-5/8 | Sound Power Level (dBA): | |
| Net Weight (lb): | 97 | | |

DIMENSIONAL DRAWING - OUTDOOR UNIT

RX15QMVMJU

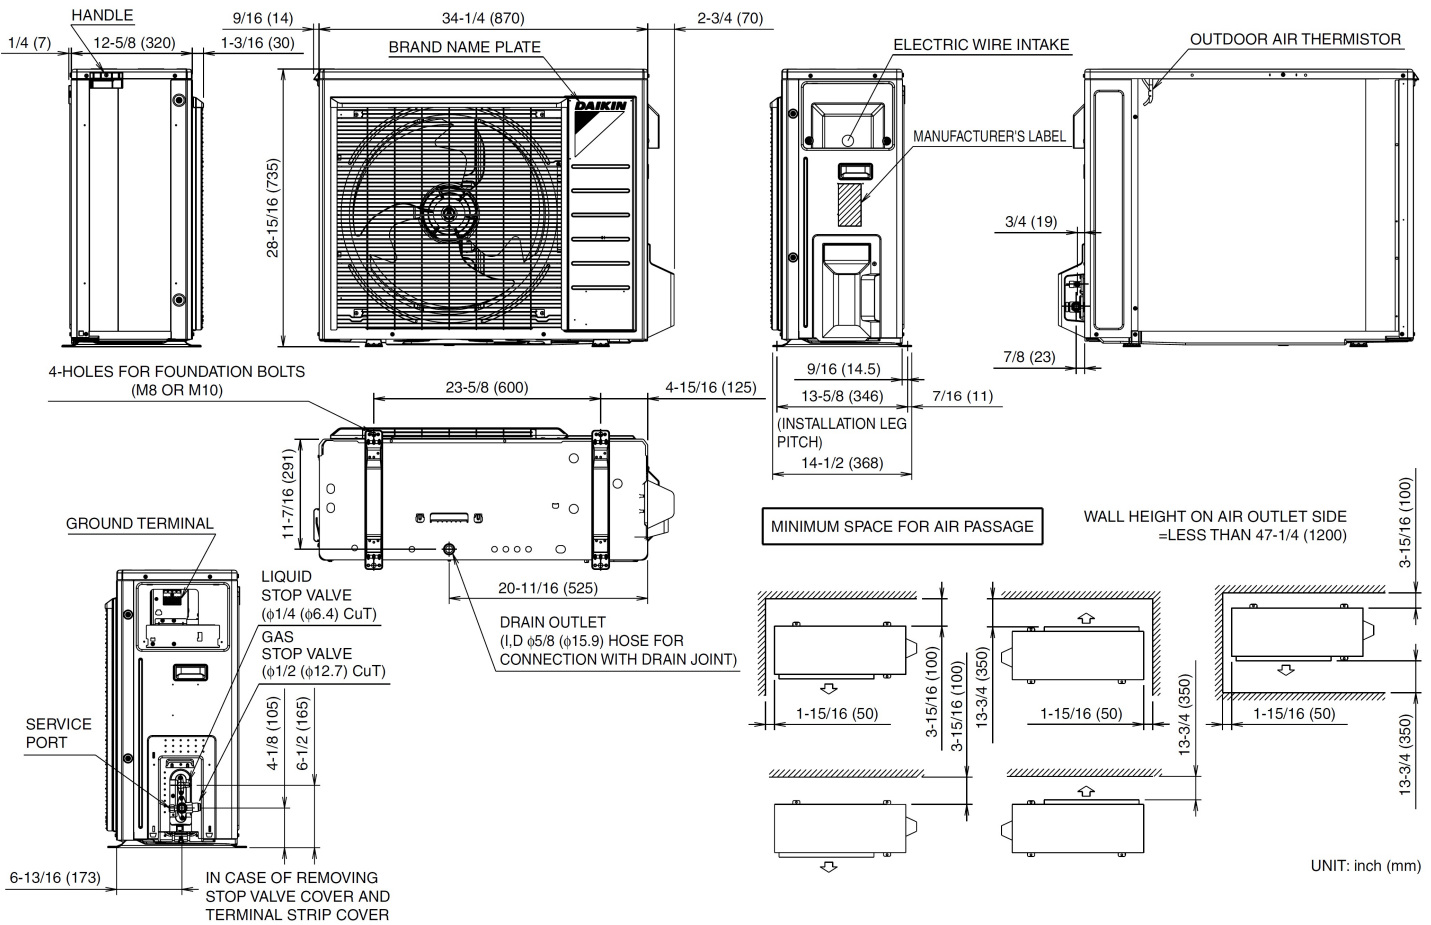

Daikin North America LLC, 5151 San Felipe, Suite 500, Houston, TX, 77056

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Date: 1/19/2017 10:48:40 AM

Page 4 of 4