






1

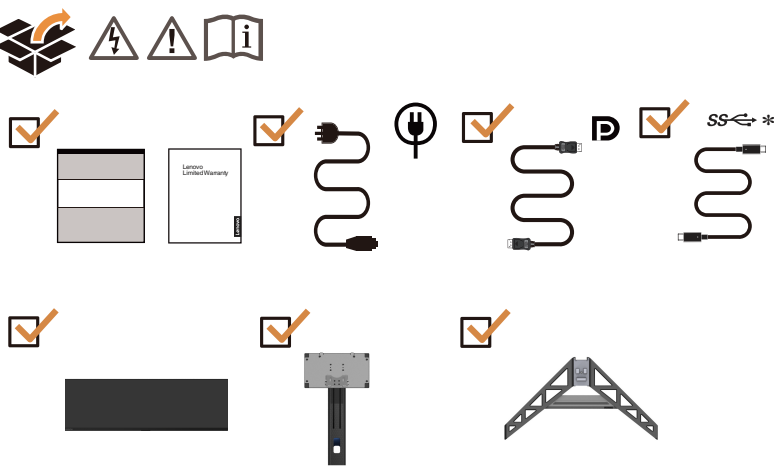


2

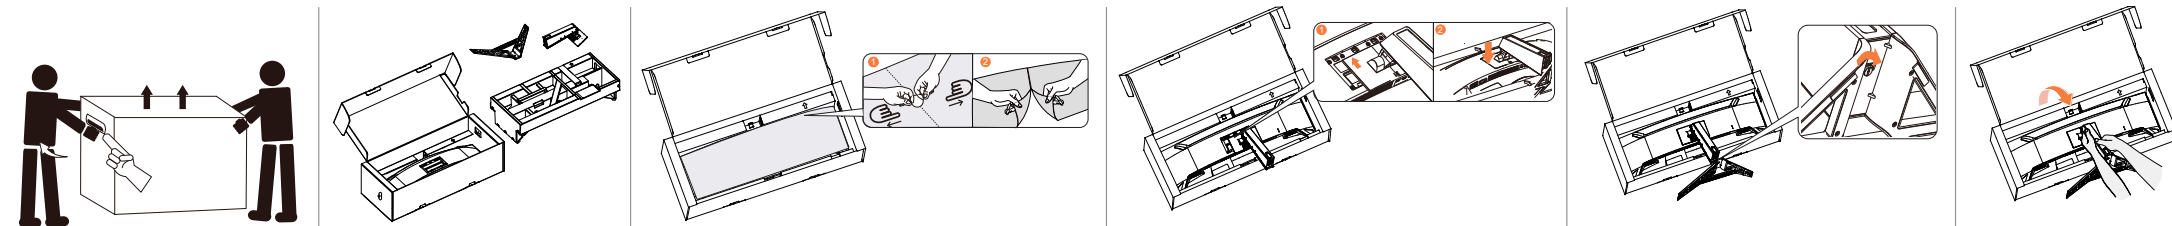

3

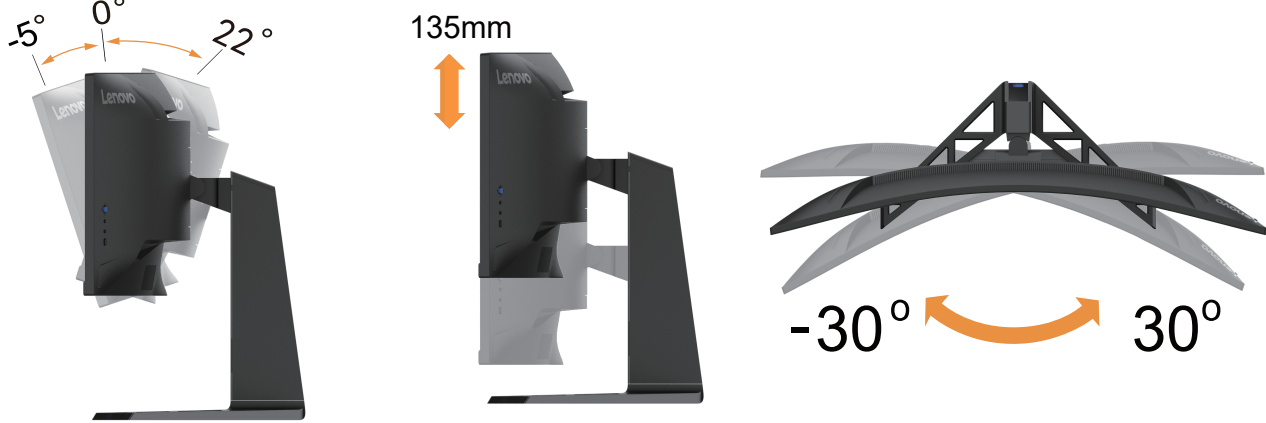


4

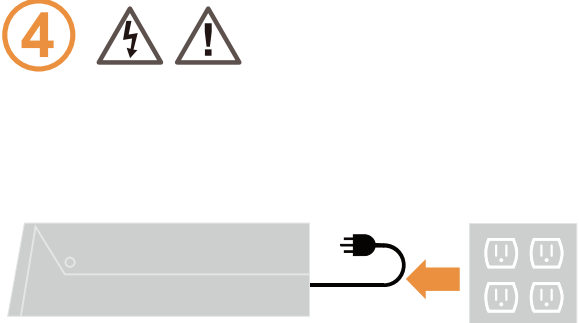


5




6

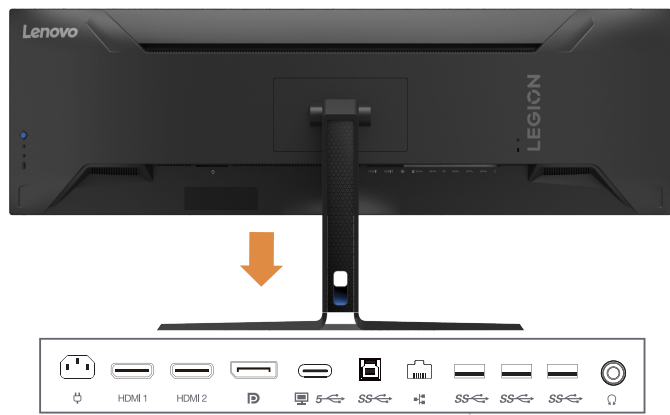


7 HDMI

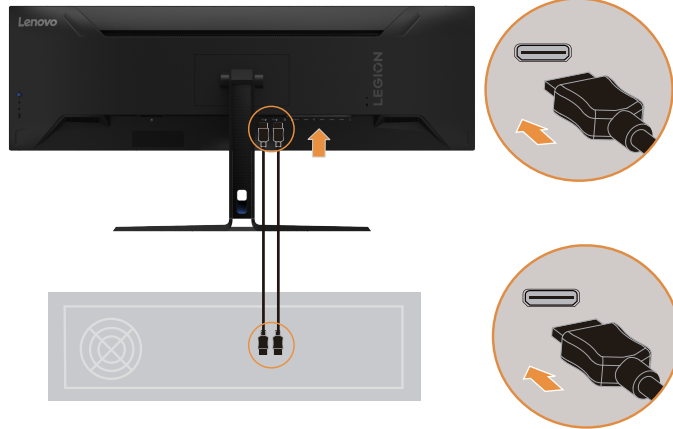


8 DP

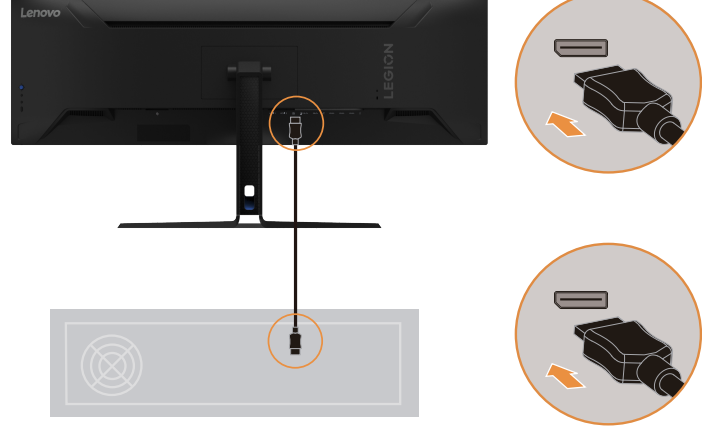

9 5 USB *

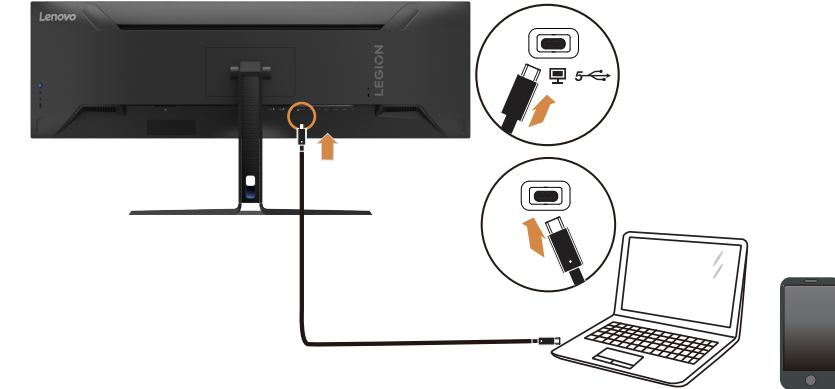


10 SS ↔ *

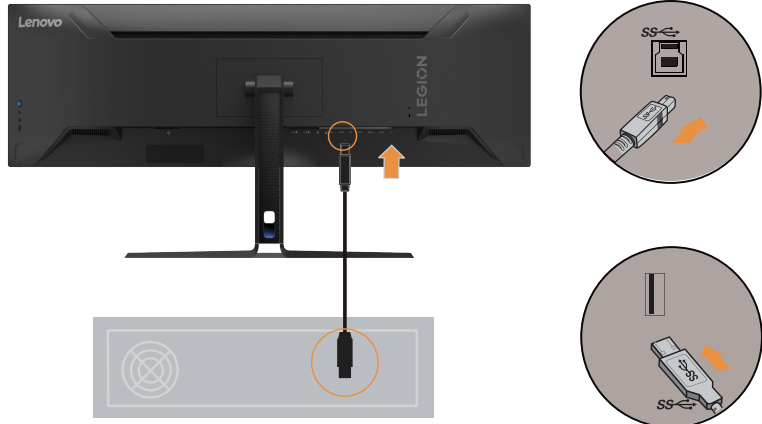


11 *




12 SS ↔ *

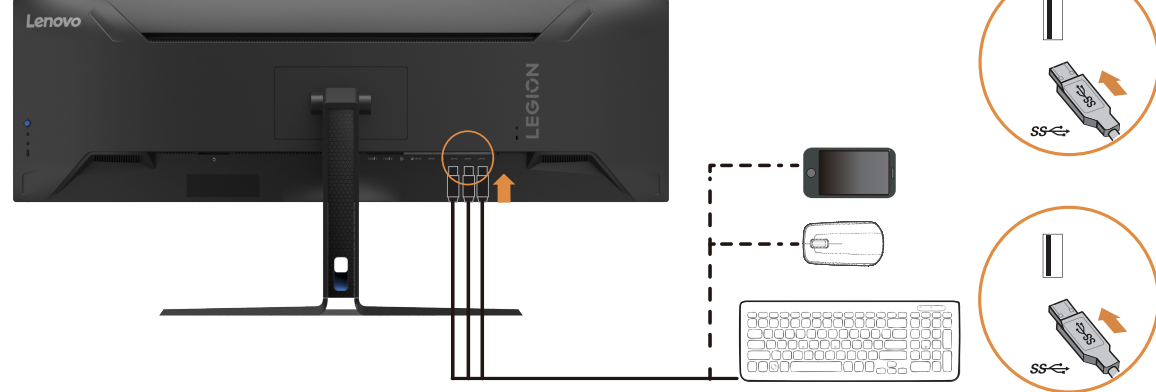


13

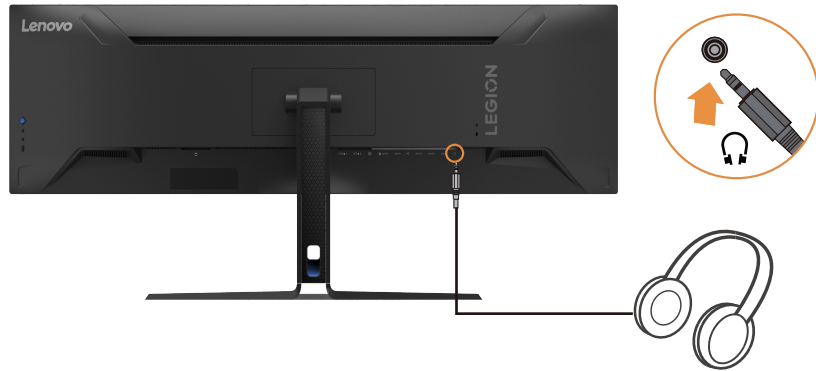

14

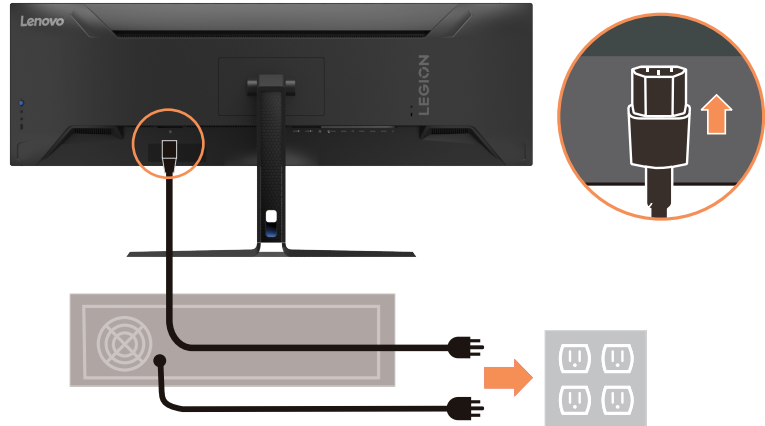






15

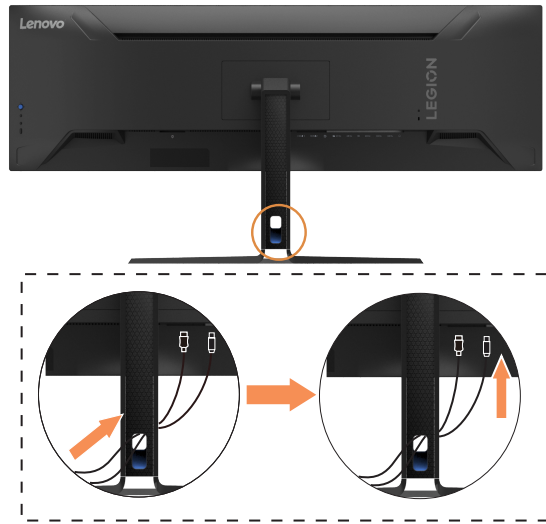

16



17

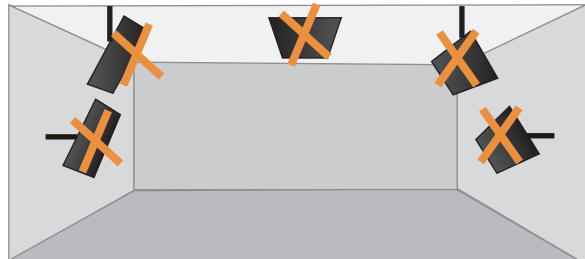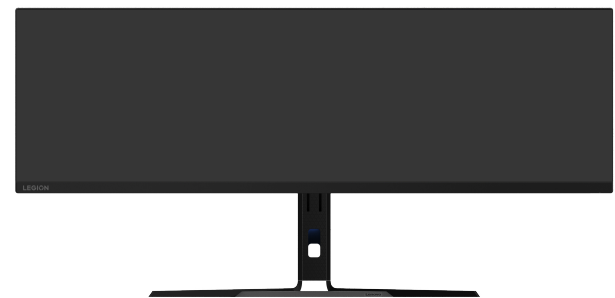

* : Depending on many factors such as the processing capability of peripheral devices, file attributes, and other factors related to system configuration and operating environments, the actual transfer rate using the various USB connectors on this device will vary and is typically slower than the data rates as defined by the respective USB specifications: 5 Gbit/s for USB 3.2 Gen 1; 10 Gbit/s for USB 3.2 Gen 2 & 20 Gbit/s for USB 3.2 Gen2x2.
*: Please download the SW "Dragon" to get a state of Ethernet optimization function.

