




Trulifi 6002

6002.1 Access Point



Transceiver




Transceiver RJ12 cable
(7 m/23 ft, white)


(10 m/33 ft)



USB Key



USB-C cable
0.45 m/1.5 ft



Access Point



Trulifi 6800
Controller Unit
(optional)





	12NC order code	System Power (W)	Power factor	Voltage (V)	Rel. humidity (%)
Trulifi Controller Unit EU 6800.00	912500103432				
Trulifi Controller Unit NA 6800.01	912500103433				
Trulifi Controller Unit Application 6800.20	912500103434				
Trulifi License 6800 NMC *	912500103436				
Trulifi Access Point 6002.1	912500101791	3	0.9	100-240 V AC	20 - 90
Trulifi Transceiver 6002.1	912500101812	7 (Access Point)		24 V DC (Access Point)	
Trulifi USB Key 6002.1	912500101792	3.5		5 V DC (USB)	
Trulifi USB Key 6002.22	912500103437	3.5		5 V DC (USB)	


* Trulifi License 6800 NMC license to be obtained from your local Signify representative

Access Point


Dimensions in mm/in

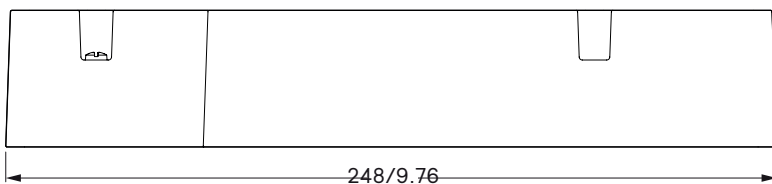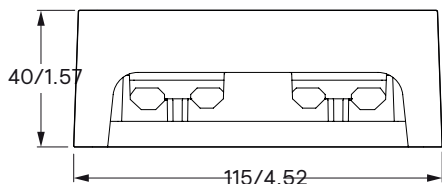


Transceiver

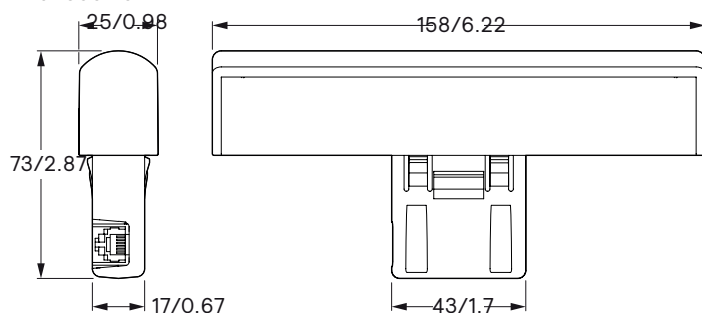

USB Key

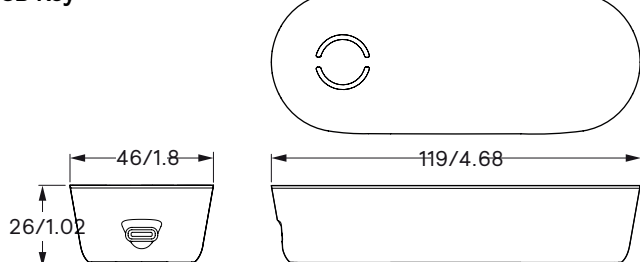

Operational distance





1.8/5.9 - 2.8/9.2 m/ft




USB Key


LiFi connectivity connectivity spread




2 m/6.6 ft





USB Key

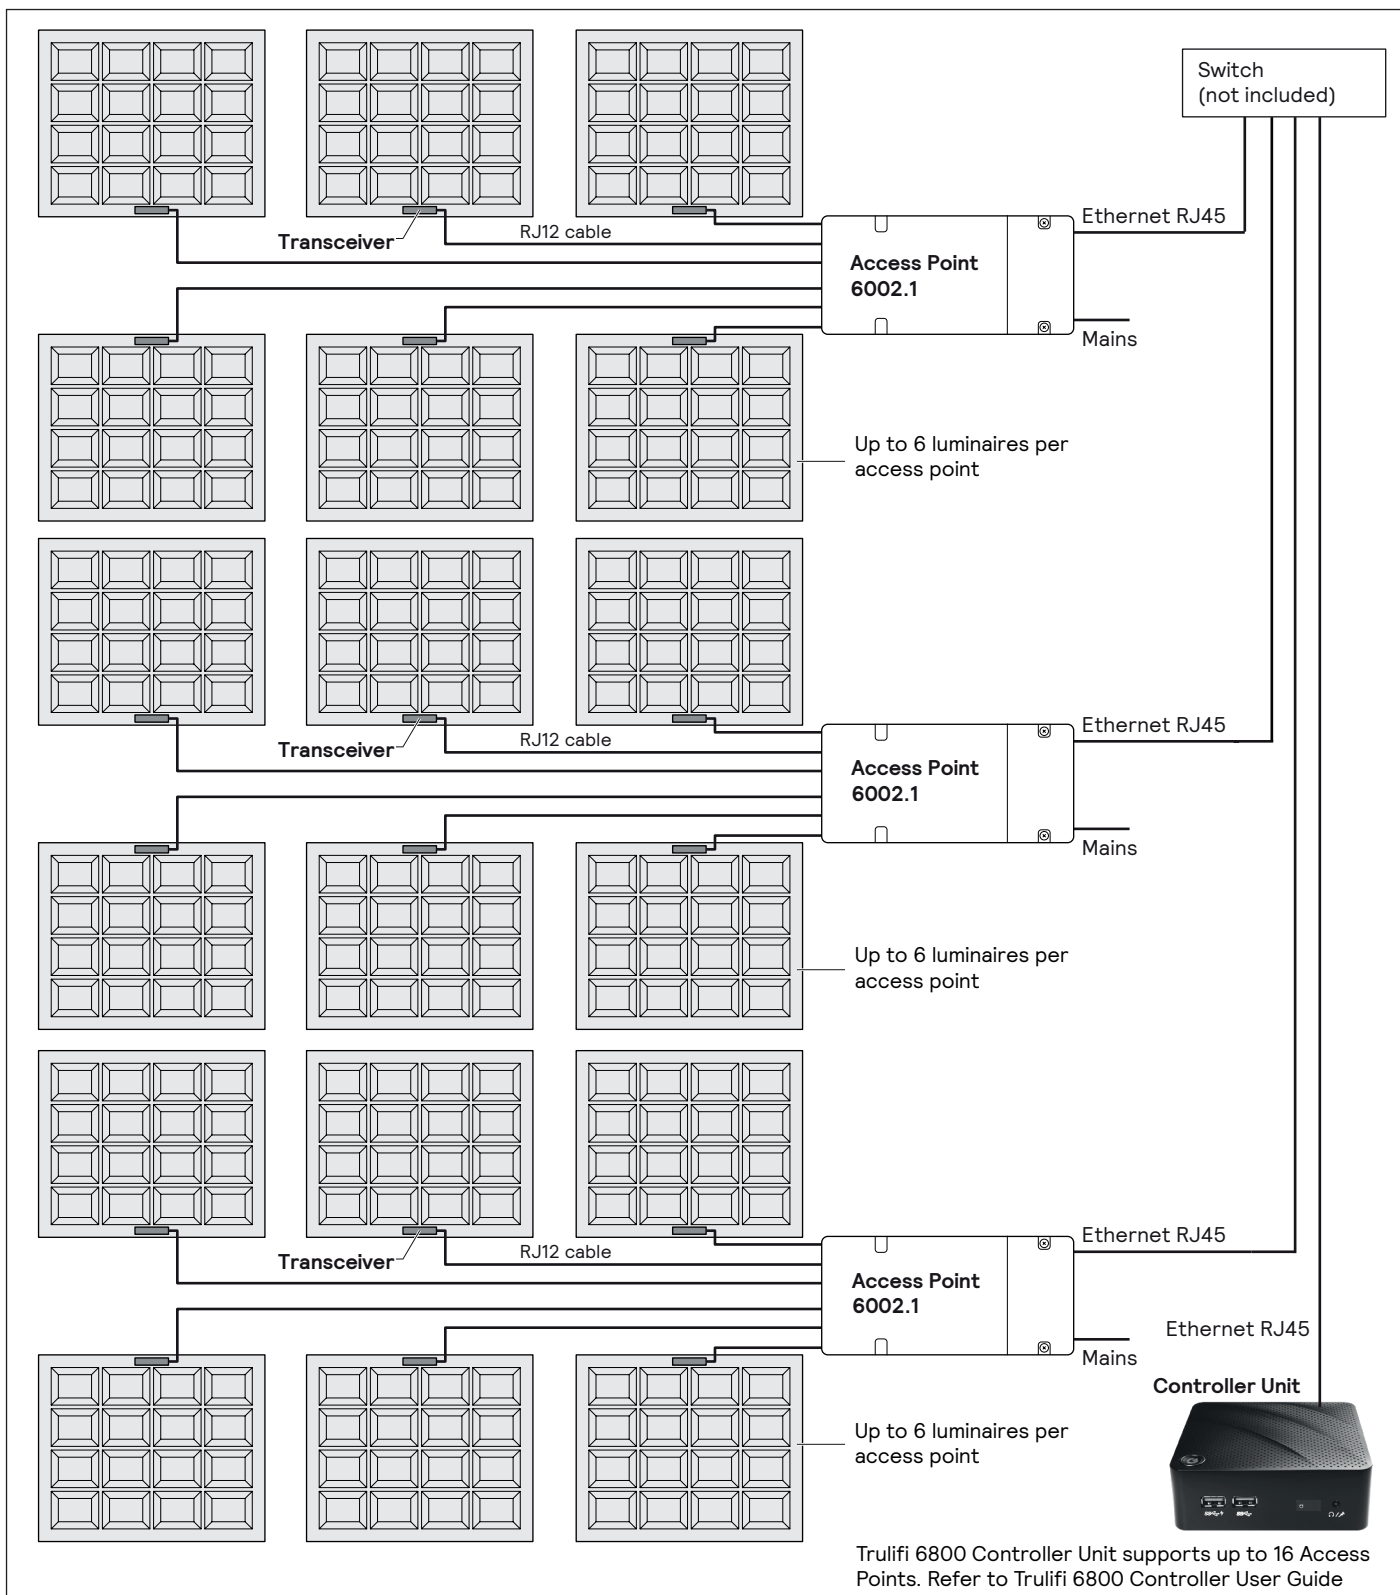

Ceiling holder (sold separately)



12NC order code: 912500101579

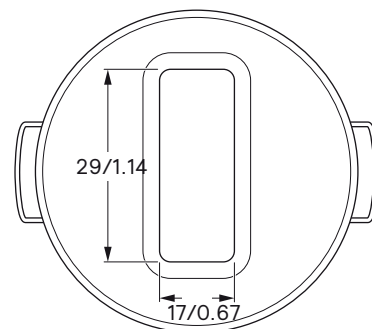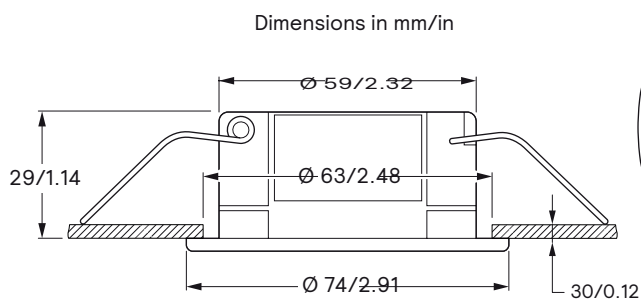

Note with regards to installation of the Truli 6002 Access Point (in short: 'Access Point') and the Truli 6002 Transceiver (in short: 'Transceiver') in the United States of America:


- The Access Point and Transceiver pass the acceptance criteria for the flame test as defined in UL standard 2043, 4th edition. Compliance with UL2043 implies that the Access Point and Transceiver can be installed in building plenums in most US regions. Please refer to your local installer for installation options in accordance with local regulations.
- The Transceiver RJ12 cable (7 mtr, white) and POF cable (10 mtr) are both plenum-rated and can therefore be installed without the need for additional metal conduits.




- The LiFi system shall be installed by a qualified electrician and wired in accordance with the latest IEEE electrical regulations or the national requirements.
- Access points and Controller shall be disconnected from mains power during installation and wiring.
- To avoid damaging the POF cable, a bend radius of at least 25 mm shall be observed during installation
- For Canada only: Canada ICES-003 (B) / NMB-003 (B)



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE DEVICES

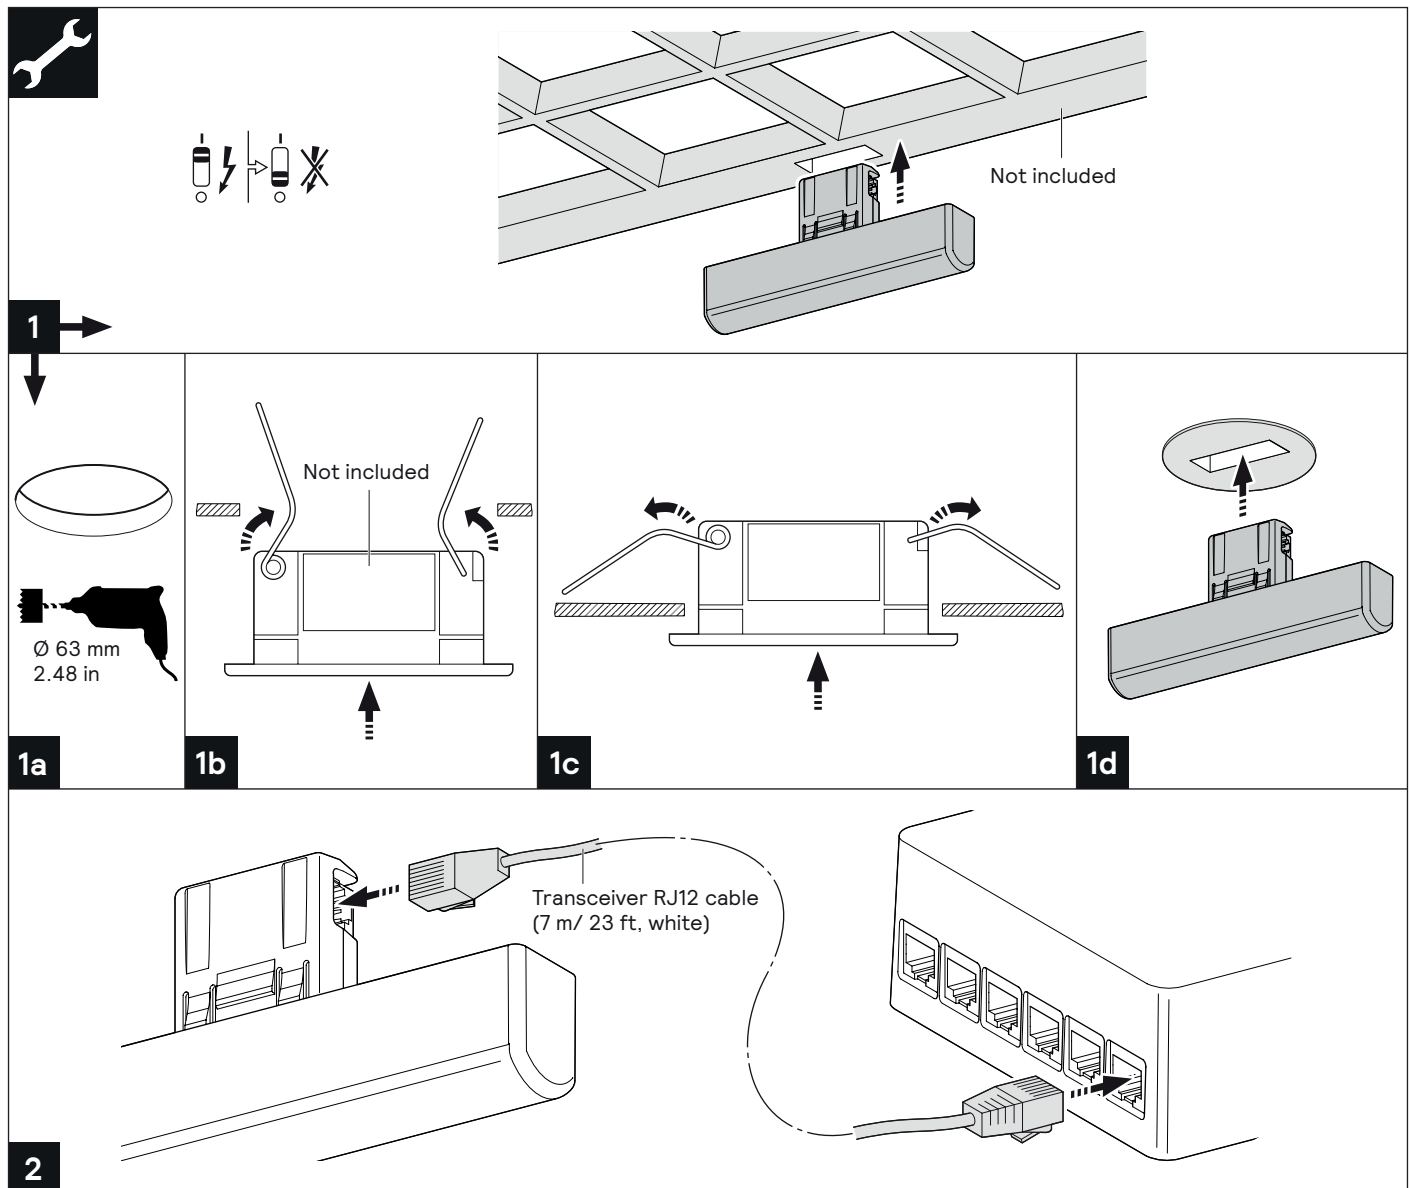

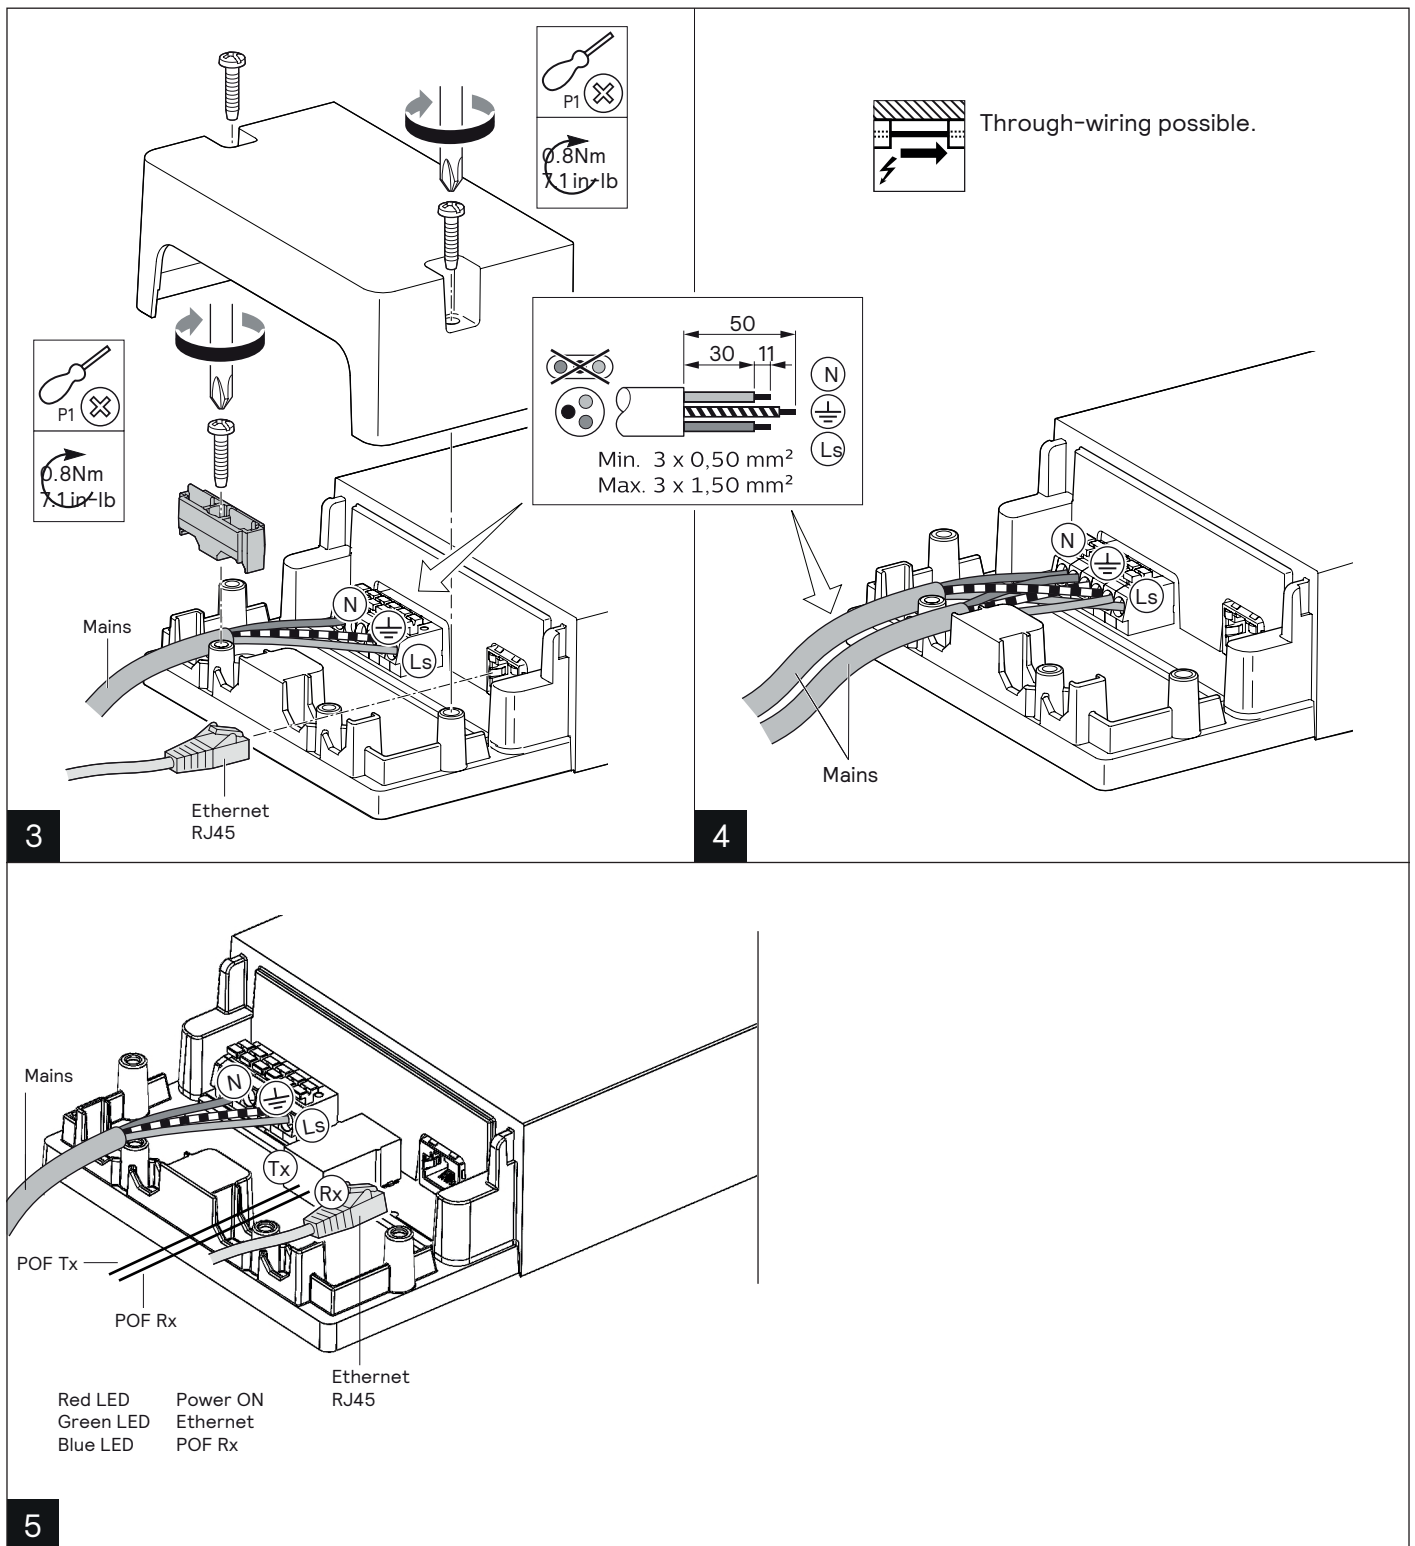

Trulifi 6002.1 system - Installation instructions

4422-947-86394_460_C

Printed in The Netherlands

Data subject to change without notice

Keep for future reference: www.signify.com