

High Performance Easy Maintenance Ergonomic Design Entry-level Printer

3-Inch POS Printer


SLK-TS100



KEY FEATURES



Easy maintenance
with Jam release lever

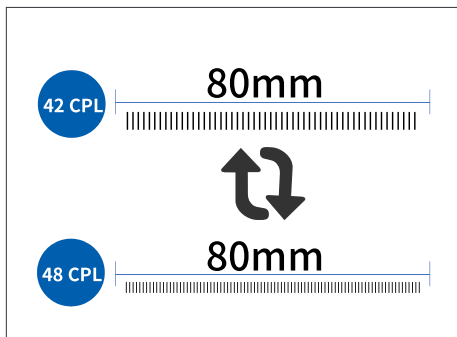

2 Fonts support with
180dpi & 203 dpi



Triple interface
USB + Serial + Ethernet

General Features

- Simple and easy replacement of components including head, motor, cutter, PCB, etc.
- Easy maintenance for paper jam
- Using a virtual serial port (physically USB), supports 2 serial interfaces at the same time
- Ideal for top exit printing with wall mount
- High speed printing at 8.6ips (220mm/sec)
- Feather light with 1,025g
- Thin paper (0.05mm THK) acceptable



SLK-TS100 3-Inch POS Printer

SPECIFICATIONS

PRINTER CHARACTERISTICS

Print Method

Direct thermal

Print Speed

220mm/sec

Print width

2.83"(72mm, adjustable by commands)

Resolution

Standard: 203 dpi

Power

Power type : External SMPS

AC : 110~220Vac 50/60Hz

DC : 24Vdc / 2.5A

Sensor

Cover open, Black mark(with Paper end)

Reliability

TPH life : 100km

MCBF : 80,000H

Cutter life : 1.5 Million cuts

Drawer port

1circuit (24V,1A Max)

INTERFACE

USB+Serial+Ethernet

AGENCY APPROVALS

CE, FCC, KC

MEDIA CHARACTERISTICS

Media Type

Direct thermal

Media Width

79.5±0.5mm

Media Core Diameter

0.68 ~ 0.7"(17.5 ~ 18mm)

Media Roll Diameter

3.1"(ø 80mm)

Thickness

0.06~0.08mm

OPERATING CHARACTERISTICS

Operating Temperature

32 ~ 113°F(0 ~ 45°C)

Operating Humidity

10 ~ 80RH%

Storage Temperature

14 ~ 140°F(-10 ~ 60°C)

Storage Humidity

10 ~ 90RH%

PHISICAL CHARACTERISTICS

Dimension (W x D x H)

5.59" x 7.28" x 5.35" (142 x 185 x 136mm)

Weight (Kg)

2.25b(1.025Kg)

SOFTWARE

Emulation

ESC/POS Command compatible

Driver

Windows Driver(9X, 2000, 2003, XP, 7, 8, 10)

SDK

Win, iOS, Android

BARCODE

1D

UPC-A, UPC-E, JAN13(EAN-13), JAN8(EAN-8),
Code-39, ITF, Codabar, Code-93, Code-128

2D

QR, PDF417

FONT / GRAPHICS

Character size


Font A(12x24), Font B(9x17),
Chinese(Traditional/Simplified, 24x24),
Korean(24x24), Japanese(24x24)

Characters per line (CPL)

Font A(12x24) : 48cpl or 42cpl,
Font B(9x17) : 64cpl,
Chinese/Korean/Japanese: 24cpl

Character set

Alpha numeric character : 95
Extended graphic : 128 x 18(1 Space page)
International character : 16

**Republic of Korea [Head Office]**

28-6, Gajangsaneopdong-ro,
Osan-si, Gyeonggi-do, 18103,
Republic of Korea

T. +82-31-8077-5000

F. +82-31-624-5310

E. sales@miniprinter.com

México

Paseo de la Reforma No. 265 Piso 2.
Oficina SBC. Col. Cuauhtémoc,
C.P. 06500 Ciudad de Mexico

T. +52-1-55-3232-9543

E. sales@miniprinter.com

North America

20280 S. Vermont Ave. STE 200,
Torrance, CA 90502, USA

T. +1-310-561-8030

E. sales@miniprinter.com

Europe

26188 Edeweicht, Holljestr.9,
Germany

T. +49-4405-989-0-838

E. europe@miniprinter.com