

Quick Start Guide


LampLinc™ INSTEON® Plug-In Lamp Dimmer Module (Dual-Band), 2-Pin

Model: 2457D2

Introduction

LampLinc can dim and remotely control any lamp or other plug-in device in your home at the touch of a button. Send commands to LampLinc from an INSTEON controller or conveniently control other linked INSTEON devices using the buttons on the side of LampLinc. Use the Load Sensing feature to control linked INSTEON devices by manually turning the device on and off from the switch on the device itself.

Dual-Band LampLinc also works as an INSTEON signal repeater and can be used to detect the electrical phases in your home (like an Access Point, #2443). Only use indoors.

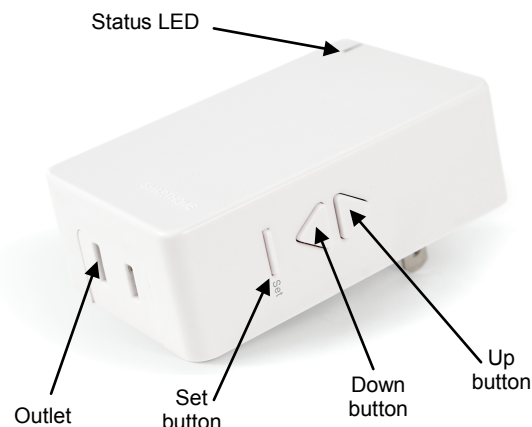

Installation

- 1) Plug the load (lamp or other device) you want to control into the outlet on the bottom of LampLinc Dimmer
- 2) Plug LampLinc Dimmer into an unswitched wall outlet
The load may turn on
If the LED is solid green, installation is complete
If the LED is solid red, tap up button
The LED should change to solid green
The load should turn on
- 3) If the load does not turn on, turn it on manually using the switch on the load itself

Using LampLinc Dimmer as an INSTEON Responder

- 1) Use the up and down buttons to adjust the load to the desired brightness
- 2) Set your INSTEON controller to linking mode. (For most controllers, press and hold the Set button for 3 seconds or an on/scene button for 10 seconds.)
You will have 4 minutes to complete the next step before linking mode automatically times out
- 3) Press and hold LampLinc Set button until it double-beeps
Status LED will flash once, then turn on solid green is the load is on or solid red if it is off
- 4) Confirm that linking was successful by tapping the controller button you just linked
The load plugged into LampLinc should respond appropriately

Using LampLinc Dimmer Buttons

LampLinc's buttons will control the load and any additional linked responders. LampLinc or the responders will behave differently depending on whether you tap, double-tap or press and hold the buttons.

Button	Tap	Double-tap	Press and hold
Up	Ramp to preset on-level	Instant full-on	Brighten until released
Down	Ramp to off	Instant full-off	Dim until released

Owner's Manual and Tech Support

Owner's Manual and current Quick Start Guide: <http://www.insteon.com/support>

Call: INSTEON Support Line at 800-762-7845

This device complies with FCC Rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.