


NUX NDM-3

Dynamic Microphone


www.nuxaudio.com

User Manual


Product Overview

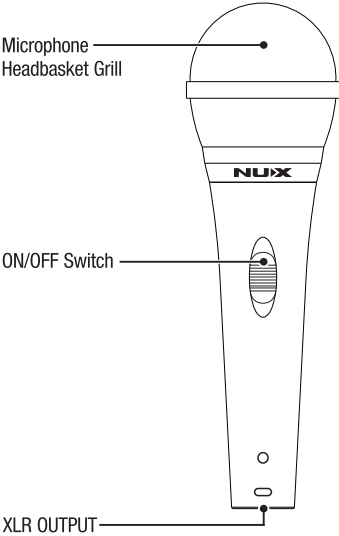

Polar Pattern

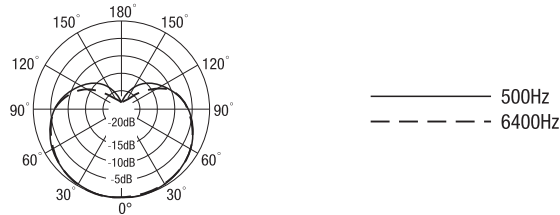

Frequency Response Curve

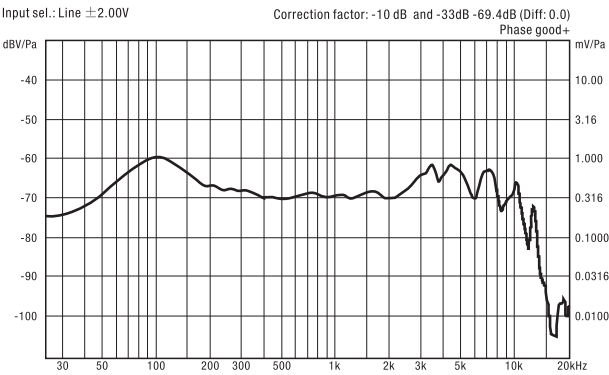

Precautions

- Environment
 1. Avoid using the product in high temperatures, high humidity environments.
 2. Do NOT use the product in the direct sunlight.
- Please do NOT disassemble the product by yourself.
- Please keep this manual for future reference.

Specifications

- Type: Dynamic Type
- Impedance: $600\Omega \pm 15\%$ (AT 1kHz)
- Sensitivity: $-48.4 \pm 3dB$ ($0dB=1v/pa$)
- Frequency Response: 50Hz~15kHz
- Direction: Uni-Directional (Cardioid) Polar Pattern
- Operating Temperature: $-30^{\circ}C \sim 60^{\circ}C$
- Construction: Sponge Ref-shake Type
- Dimensions: 171mm(L)x54mm(W)x54mm(H)
- Weight: 261g

Accessories

- User Manual
- MIC Holder
- Pouch

*Product appearance and specifications are subject to change without notice.