


ASK nano 4K




Key Features

- 2 Standard packet for option
 - 1 transmitter & 1 receiver
 - 1 transmitter & 2 receivers support dual display
- Plug-and-Play: No software installation required.
- Pocket-sized Design: Portable and easy to use anywhere.
- Built-in Antenna: Stable 5GHz transmission with a line-of-sight range up to 20 meters.
- 4K Ultra HD with Low Latency: Supports up to 4K30 input on TX and 4K60 output on RX, with a latency of 0.1 seconds, ideal for meeting rooms and home entertainment.
- Mirroring and Extended Modes: Casts content from small screens to large screens, supporting both mirroring and extended display modes.
- Multi-device Connection: Supports up to 1 transmitter connected to 4 receivers,

Application Diagram

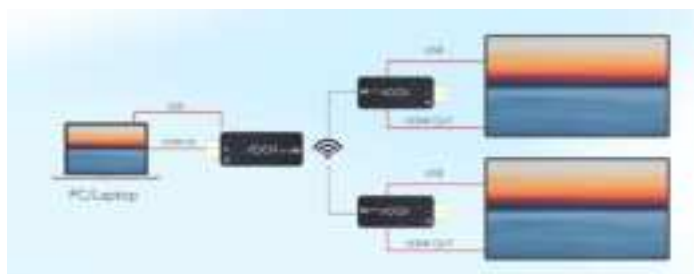

Dimensions

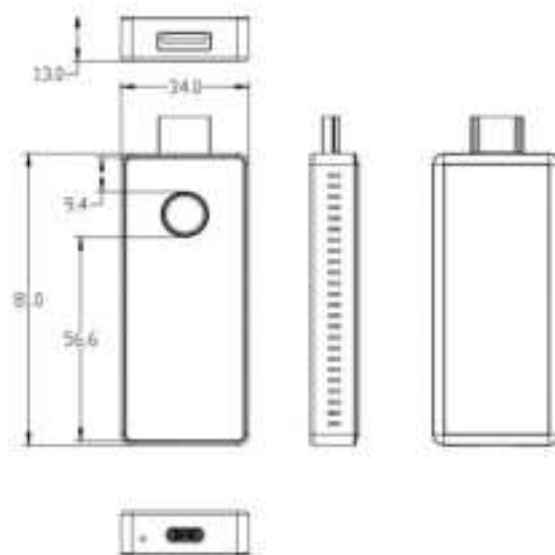

Order Codes

| Product Code | Item |
|---------------|--------------------------------------------------|
| 450-2002-01-1 | ASK nano 4K (1T1R) 1 Transmitter&1 Receiver |
| 450-2002-02-1 | ASK nano 4K Set (1T2R) 1 Transmitter&2 Receivers |
| 450-0002-02-1 | ASK nano 4K RX |

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Receiver

| | | | |
|-----------------------|---------------------|------------|--------------------|
| Connectors | Output | HDMI | 1×HDMI-A |
| | Power | USB | 1×USB-C |
| Performance | Output Resolutions | HDMI | |
| | | VESA | Up to 3840×2160@60 |
| | Supported Standards | HDMI | 2.0 |
| | | HDCP | 2.2 |
| Power | Input Voltage | DC 5V/1A | |
| | Max Power | 3.5W | |
| Operating Environment | Temperature | 0℃～40℃ | |
| | Humidity | 10%~80% RH | |
| Storage Environment | Temperature | -10℃～60℃ | |
| | Humidity | 5%~90% RH | |
| Physical | Weight | Net | 0.03kg |
| | Dimension | Net | 91mm×34mm×13mm |

Transmitter

| | | | |
|-----------------------|---------------------|------------|----------------------------------------------------------------|
| Connectors | Input | HDMI | 1×HDMI-A |
| | Power | USB | 1×USB-C |
| Performance | Input Resolutions | HDMI | |
| | | SMPTE | 1080p50/60 |
| | | VESA | 3840x2160@24/25/30 1920×1080@24/25/30/50/60 1280x720@50/60 |
| | Supported Standards | HDMI | 1.4b |
| | | HDCP | 1.4 |
| Power | Input Voltage | DC 5V/1A | |
| | Max Power | 3.5W | |
| Operating Environment | Temperature | 0℃～40℃ | |
| | Humidity | 10%~80% RH | |
| Storage Environment | Temperature | -10℃～60℃ | |
| | Humidity | 5%~90% RH | |
| Physical | Weight | Net | 0.03kg |
| | Dimension | Net | 91mm×34mm×13mm |

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

