




web: www.ibroadlink.com

Business Contact: intl@ibroadlink.com **Service & Support:** support@ibroadlink.com



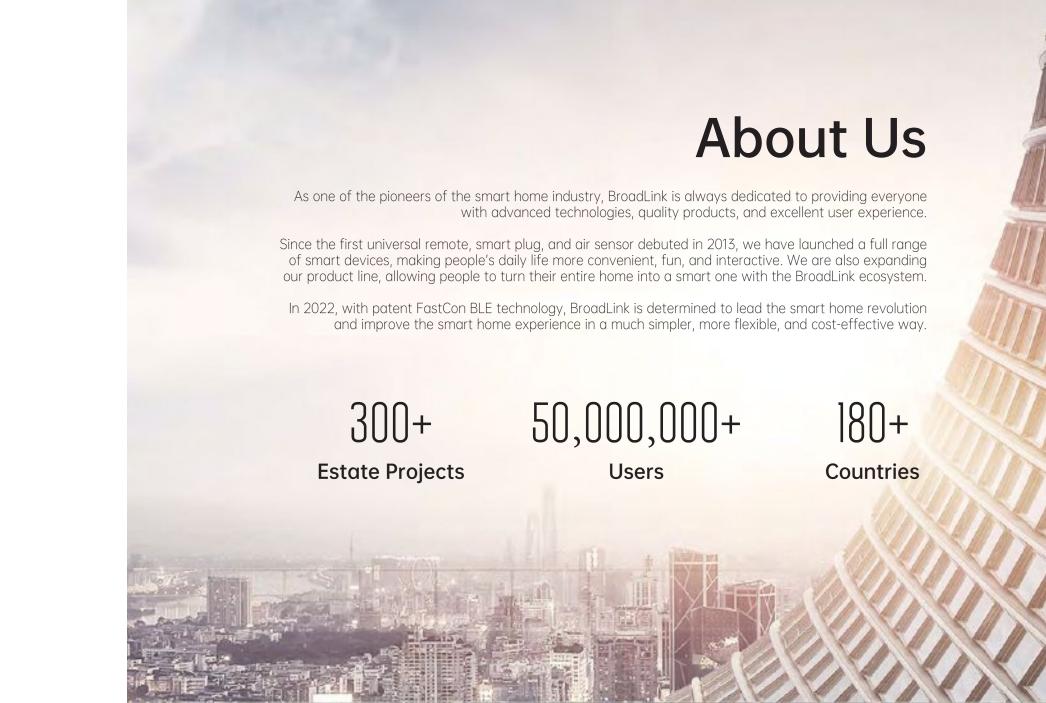


REDEFINING SMART HOME



BROADLINK SMART HOME ECOSYSTEM

Choose from 20+ categories and 100+ models Make your home smart all at once

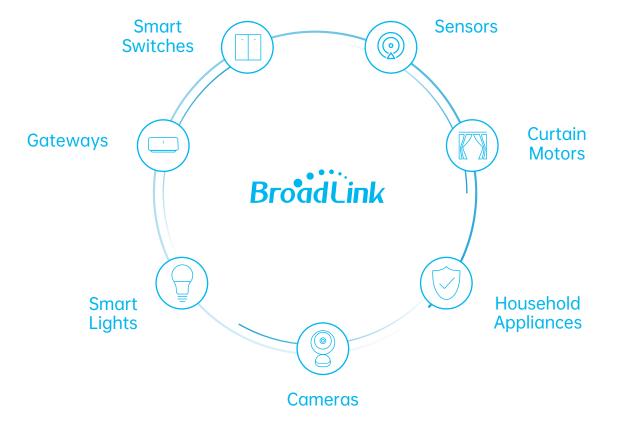


WHY FASTCON BLE


Super Mesh Network Signal range is extended to 500 meters Covering your whole house without blind spot **Guaranteed Success Rate** Devices detection and response rate is up to 99.99% **Expanded Network Scale** Max. 250 devices can be added and Zero Setup group controlled under one single network Automatic device detection after power up No Wi-Fi Required Bluetooth connection enables you to control devices locally. * Except for voice and remote control **Batch Pairing** No Account System Max. 90 devices can be Quick use without privacy concerns set up at the same time


HOW TO CONTROL IT'S YOUR CALL

BroadLink BLE Scenes Automation App Control

CREATE THE PERFECT SCENE FOR EVERY OCCASION

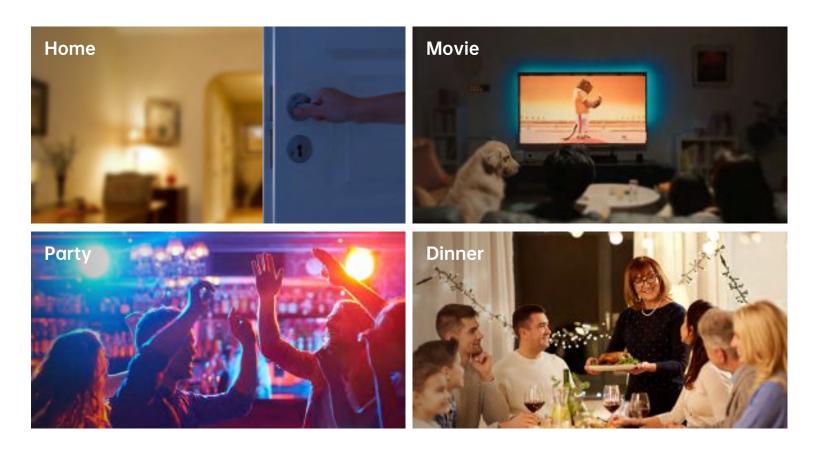

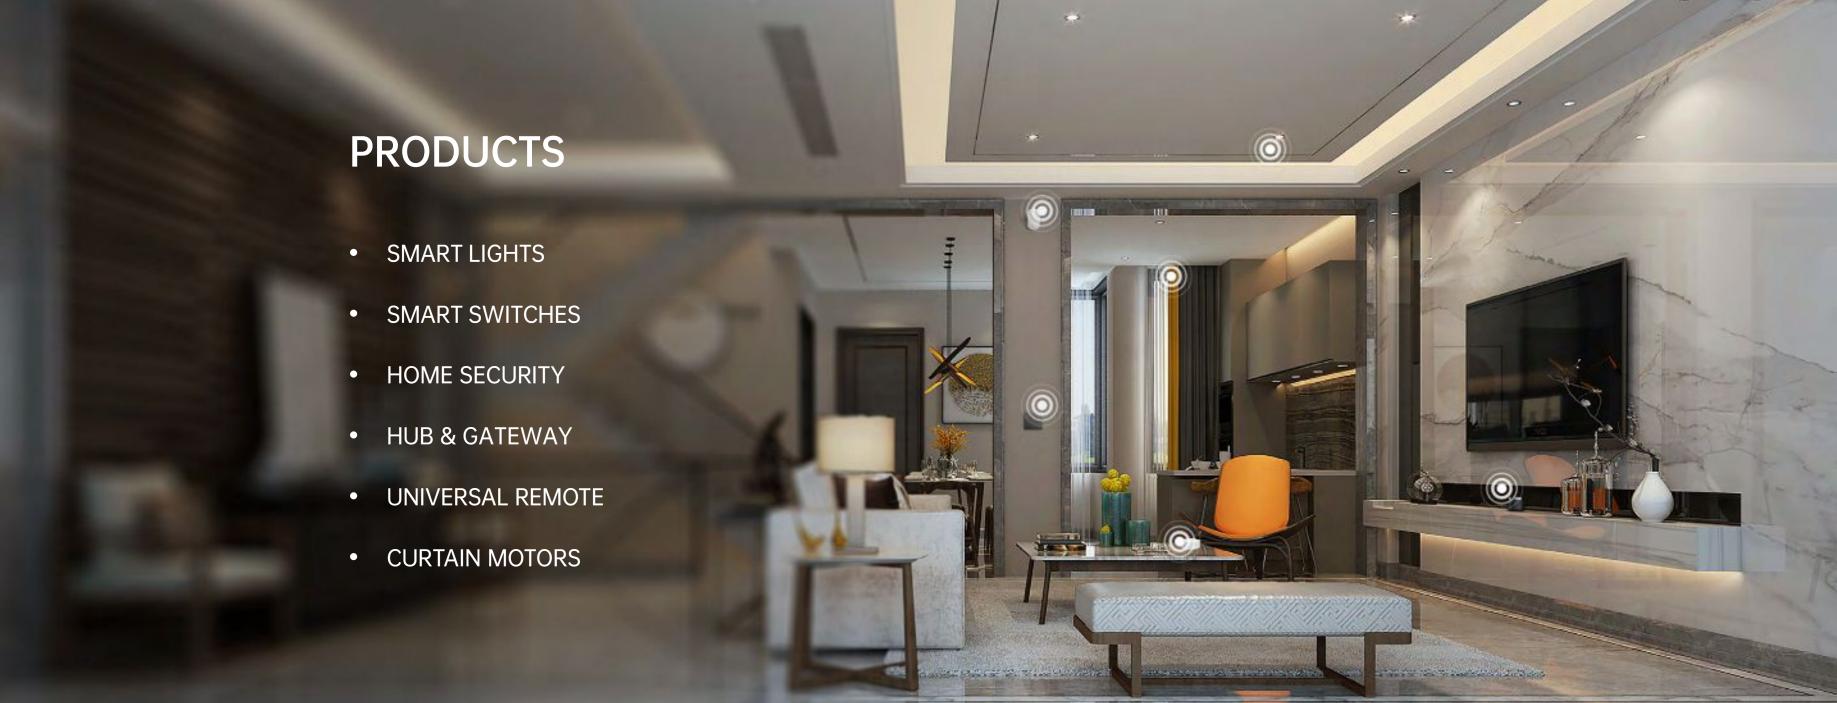

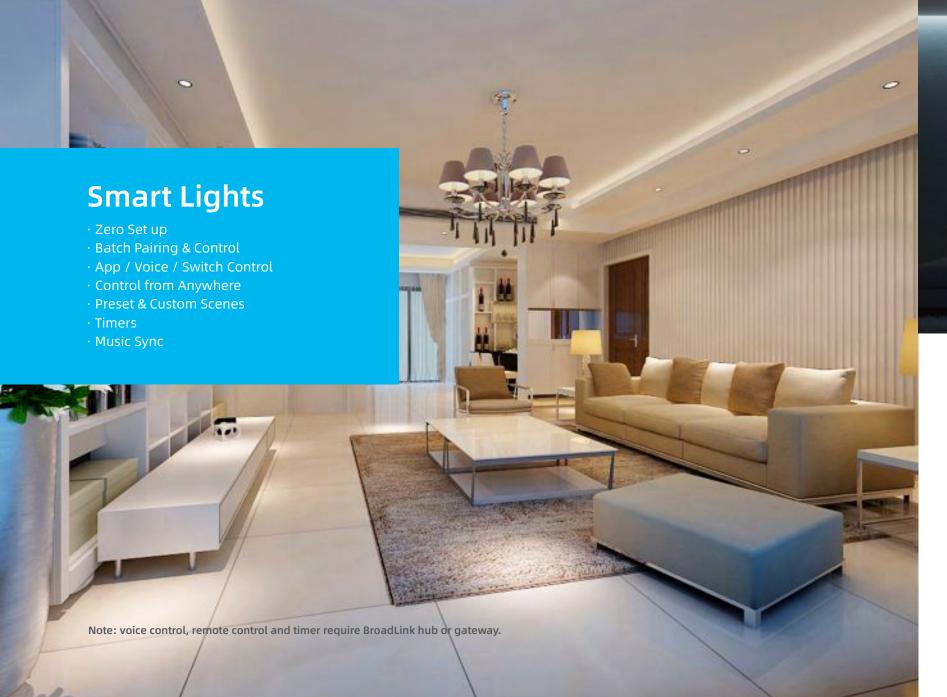



Contains RGBCW Smart bulbs (E26/27) *3, Scene Switch *1, Mini Hub *1

Starter Kit

Model: SKE26 / SKE27

Voltage: AC 110-130V / 200-240V

Lamp Base: E26 / E27
Power: 9W
Luminous Flux: 800lm

CCT: RGB+2700-6500K









Voice Control Remote Control

Group Control

l Preset Scenes









12







Smart Bulb

Model: LB4E26 / LB4E27 Voltage: AC 110-130V / 200-240V Lamp Base: E26 / E27

9W Power: Luminous Flux: 800lm

CCT: RGB+2700-6500K



Smart GU10 Bulb

Model: LB4GU10EU / LB4GU10US Voltage: AC 110-130V / 200-240V

3.5W Power: 350lm Luminous Flux:

CCT: RGB+2700-6500K



Smart Filament Bulb C35

220V / 120V Voltage: E14 / E12 Lamp Base: 4.5W Power: **Luminous Flux:** 470lm 2700-6500K



Smart Filament Bulb A60

220V Voltage: E27 Lamp Base: 4.9W Power:

Luminous Flux: 250lm

RGB+2700-6500K







Group Control



Music Sync


























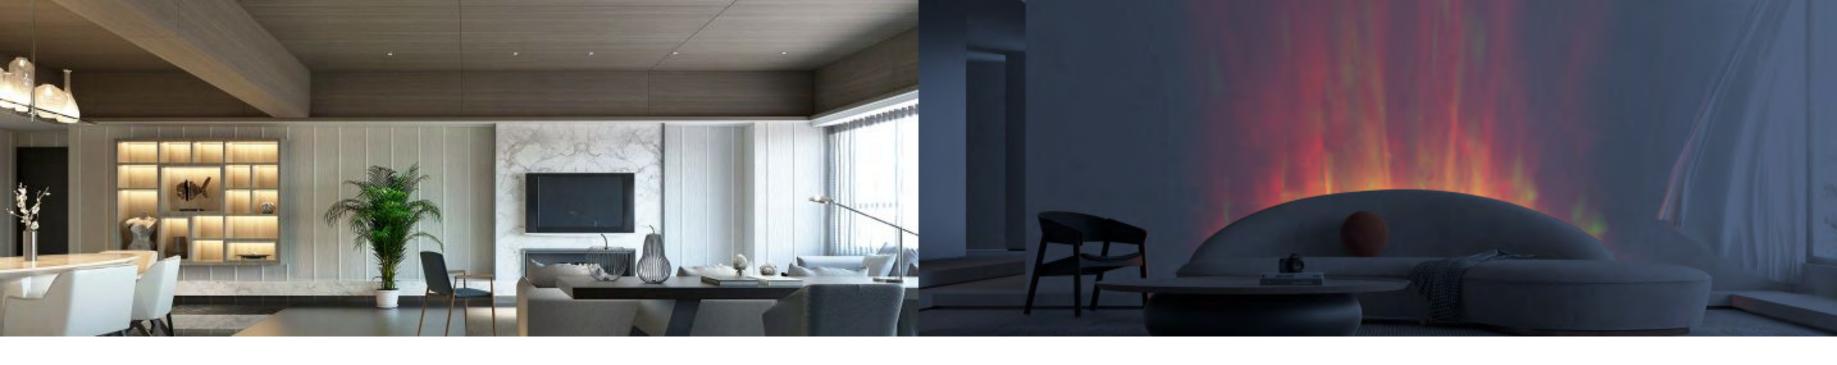



Smart Downlight

Voltage: Hole Size: 120V / 220V ф75mm



Smart Spotlight

IP20 9W Model: Power: CCT:

2700-6500K Hole Size: ф75mm



Smart Wall Washer Light

Rated Power:

20W DC 24V (adapter required) Voltage:

20W Power:

CCT:

RGB+6000K L1000*H163*W70mm Size:































Remote Control

Group Control

Preset Scenes



Smart Strip Light



Voltage:

110-240V RGB+3000-6500K

Smart LED Driver

85-265V AC 50/60Hz 9-42V DC 260mA Input: Output:



Smart Ceiling Light

YH-XD-30 220V E26 / E27 Model: Voltage: Lamp Base: Power: 30W Luminous Flux: 2160lm

RGB+3000-6500K CCT: Size: ф300*H40mm









Preset Scenes


























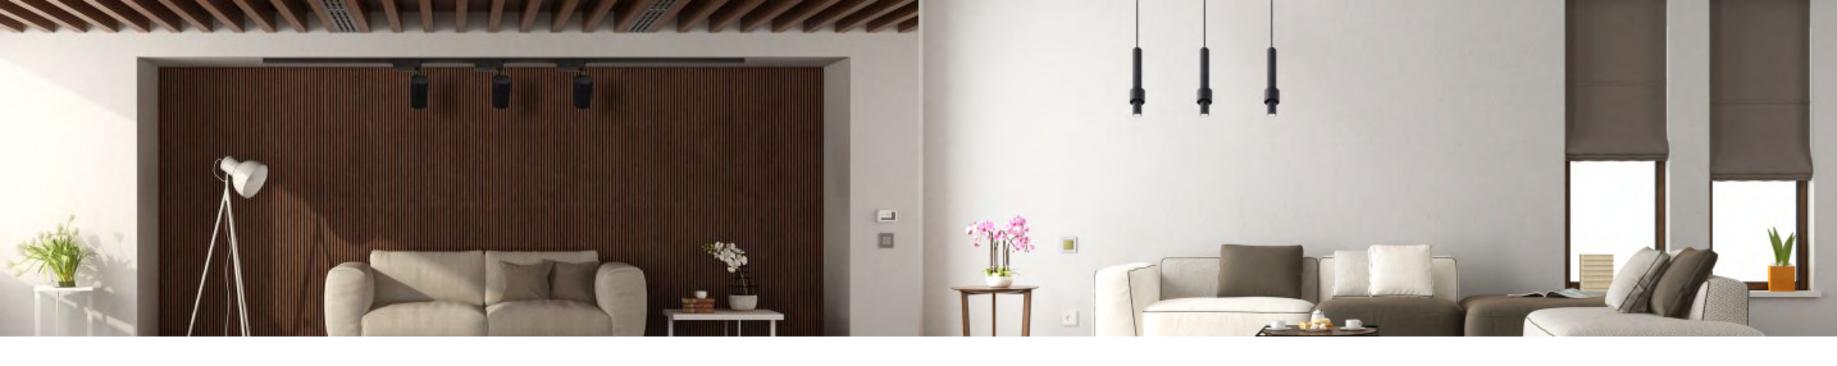












Smart Track Grille Light

Smart Track Flood Light

Smart Track Spotlight


Smart Track Folding Light

Smart Track Pendant Light

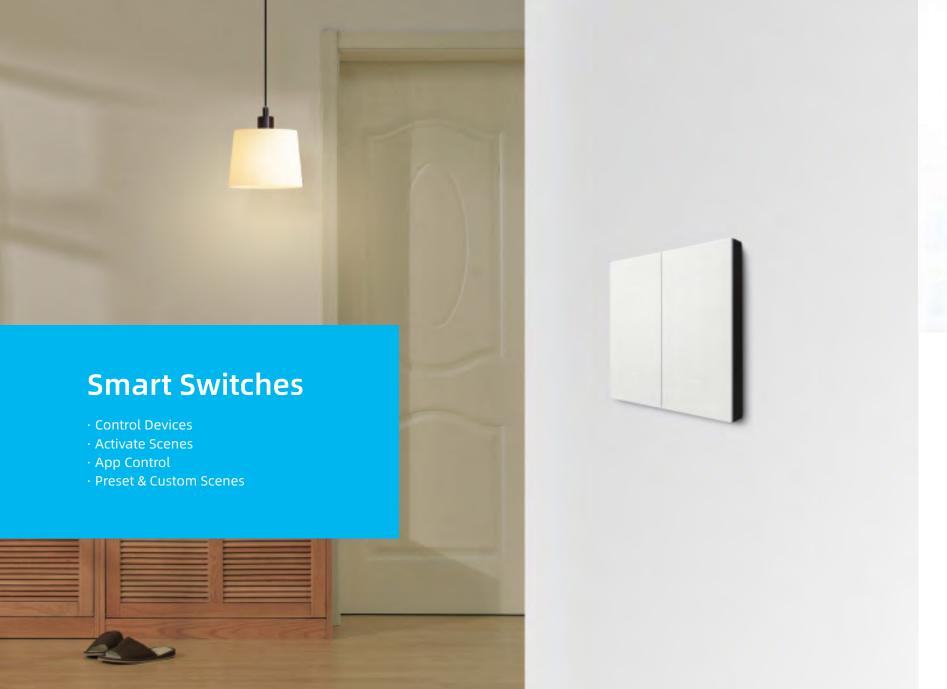







Smart Wall Light Switch

LC1A-NB-1 / LC1A-NB-2 / LC1A-NB-3 AC100-240V Model:

Input:

Power Supply: Neutral and Live wire

White / Gold / Grey Color:

Max Load:

each gang LED Lamp: ≤200W


INC Lamp: ≤1000W









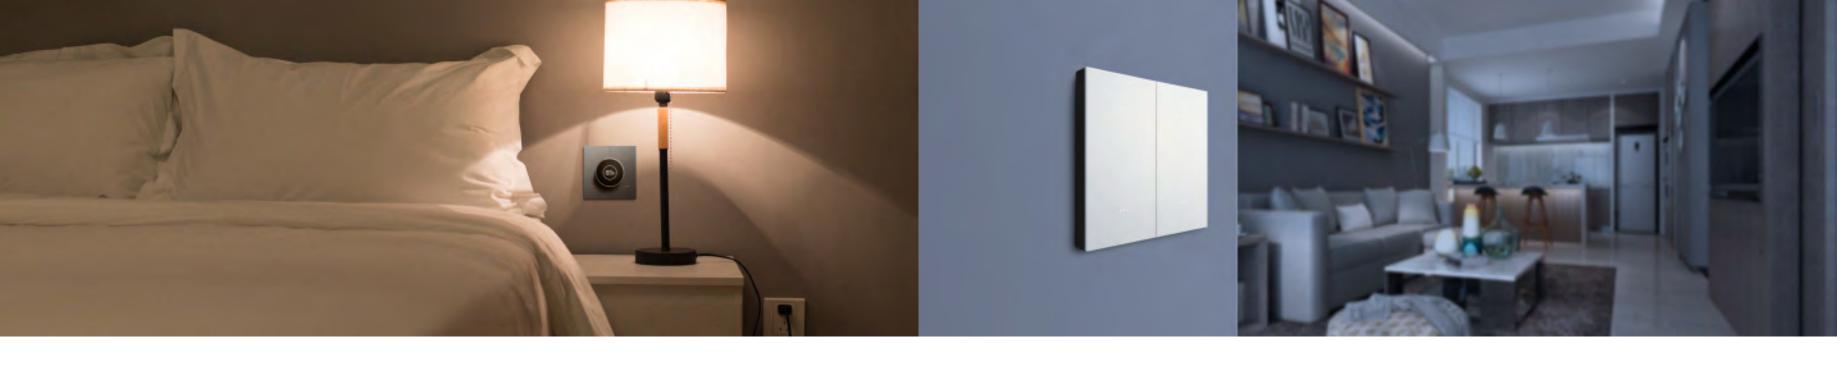

Multi Function Smart Switch



Model: WS-RDS1B
Color: White / Gold / Grey



App Control



Custom Scenes





Model: SC4B4 Input: DC 3V (CR2430 Battery)



On/Off

Custom Scenes



Smart Trigger



Smart Scene Switch

SC1A-NB-4 / SC1A-NB-6 AC100-240V Model:

Input:

Neutral and Live wire Power Supply: Color: White / Gold / Grey












Preset Scenes Custom Scenes Smart Trigger



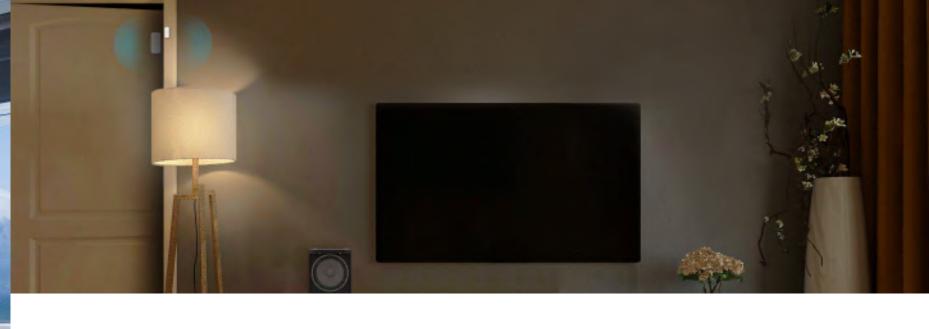

Door Sensor

Model:

SRD4 DC 2.7-3V (AAA Batteries *2) Power Input:













Tamper Dection Low Battery Warning





Radar Motion Sensor (Battery)

Model:

Power Input: DC 2.7-3V (AAA Batteries *2)



Radar Motion Sensor (Wired)

SR4M-AC Model: Voltage: 220V, 50/60Hz



Temperature and Humidity Sensor

SR4T 3V Voltage: CR2032 Battery:



Water Leakage Sensor

DC 3V (CR2450 Battery)
































Trigger Automation Historical Record Status View Low Battery Warning

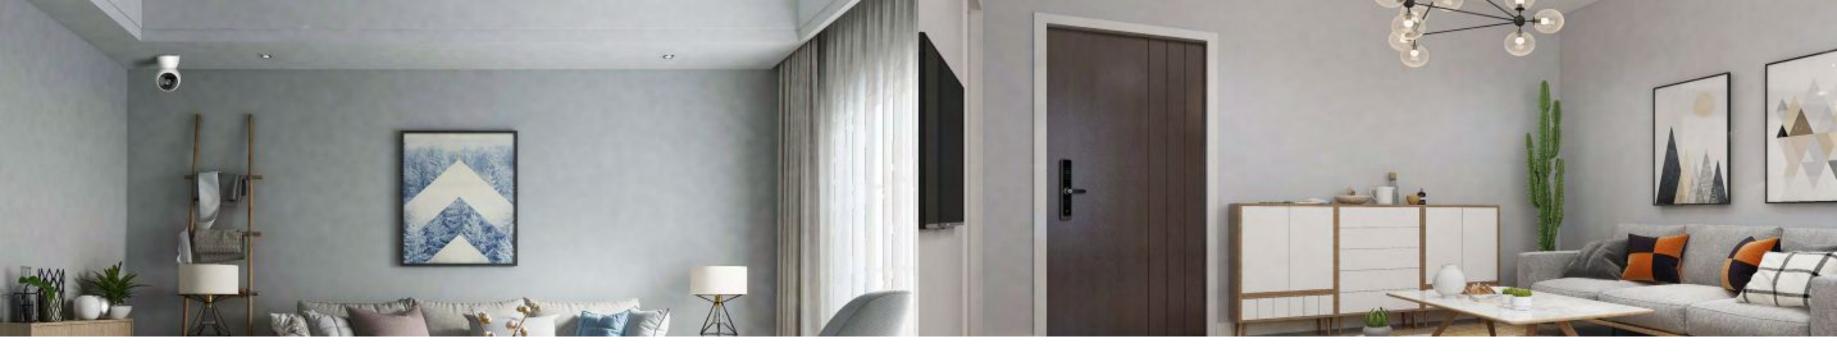



Smart Camera

Image Sensor: 1/2.9" 2 Megapixel CMOS Effective Pixels: 1920(H)*1080(V)

Lens & FOV: 3.6mm@F2.0, 85°/46°/100° IR Distance: Night Visibility Max. 10m



Motion & Sound Detection



Motion Zone Selection



SD Card & Cloud Storage





Auto Tracking Two-Way Audio



Smart Doorbell

Image Sensor: 1/2.9" 2 Megapixel CMOS

Effective Pixels: 1920(H)*1080(V) Lens & FOV: 105°/88°/ 47° IR Distance: Max. 10m















Remote Monitor Tamper Dection

Duplex Audio



Smart Door Lock

Voltage:

1.5V (AAA Batteries) Power Input:

















Real-Time Alert Physical Key/Card Fingerprint Temporary Password Status View Low Battery Warning







GW4C Model: Voltage: DC 5V/1A (Micro USB)

Communication: Wi-Fi 802.11 b/g/n (2.4GHz)

Mode



Smart BLE Gateway

Model: IHG2-BL

Voltage: DC 5V/1A (Micro USB)

Communication: Wi-Fi 802.11 b/g/n (2.4GHz)

Mode



Universal Remote

Rating Power: 5V DC / 1A Infrared Frequency:



Voice Control



Local IR Code



Cloud IR Update Manual Learning



IR Code



IR Control



50000+ IR Code on Cloud



38kHz

One-Button



Timers & Triggers





Smart Air Conditioner Controller

AGJ1-BF DC12V, 0.5A Model: Input:

106mm*96mm*58mm MEAS:



Smart Curtain Motor

Model: CM-DKW01B Voltage: 100-240V Rated Power: 22W Input Current: 1.2NM Torque: 50KG Max Load:

Smart Tubular Motor

Model: CM-JLW01B-25 Rated Power: 20W

2NM Torque: 8KG Max Load: 20mm Diameter:













Status View



App Control









Scenes Automated





Smart Tubular Motor

AC 100-240V, 50/60Hz AC 100-240V, 50/60Hz 10A Input: Output: Current:





Smart Power Strip



App Control



Overload Protection