

## PENDANT SPEAKER ,30W (BLACK)



### DESCRIPTION

The NVS-EN30PS-D is an EN54-24 certified 30W Pendant loudspeaker engineered for voice alarm systems, ensuring compliance with stringent safety standards. Designed for versatile operation, it supports both 100V line distribution and 8 Ohm impedance, making it suitable for varied installation requirements. Featuring a robust Euro Phoenix connector, the loudspeaker facilitates secure and reliable connections in critical applications. With high sound pressure levels and optimized frequency response, it ensures exceptional speech intelligibility for paging systems and delivers balanced audio quality for background music (BGM) applications. Its durable construction and acoustic performance make it ideal for integration into public address and voice alarm systems.

### FEATURES

- ◉ EN54-24 Certified
- ◉ 5.25" PP full-range woofer
- ◉ IP44 rated, indoor/outdoor use
- ◉ UV & fire-resistant ABS cabinet
- ◉ 95°C fire-resistant cable & thermal fuse
- ◉ Pendant design for uniform sound dispersion
- ◉ Safety hanging wire for secure mounting

### Specifications


Model	NVS-EN30PS-D
Rated Power	30W
Driver Unit	5.25" woofer and 1" tweeter 2-way speaker system
Material	UV-fire resistant ABS enclosure
Frequency Response	65Hz-20KHz
Sensitivity(1m,1w)	90dB±3dB
Maximum SPL (1m)	104dB±3dB
Coverage Angle	100°
Input Voltage/Impedance	100V, 8Ω
Power Rating Options @100V	30/15/7.5/3.8W
Input Connector	Fireproof phoenix connector
Color	Black
Dimension	Ø 195×250mm
Weight	2.4kg

NVS-EN30PS-D




PENDANT SPEAKER ,30W (BLACK)

FREQ. RESPONSE  
(dB SPL,1W,1m)

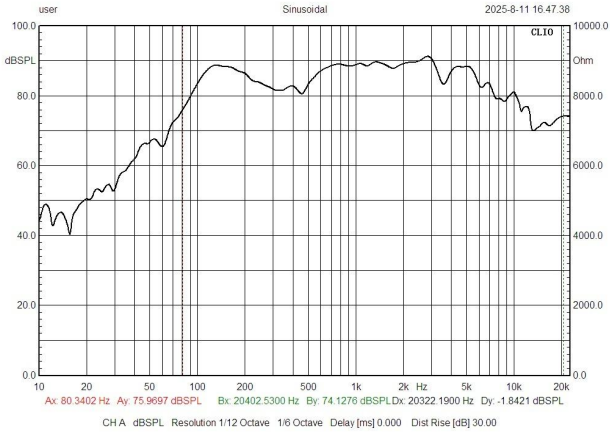

IMPEDANCE

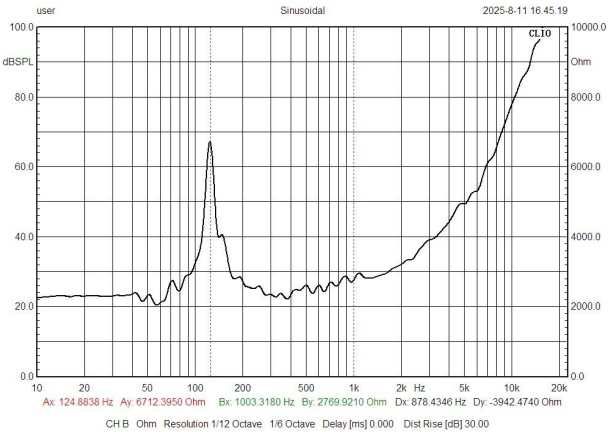

DIMENSION



ORDERING INFORMATION

Part Number	Description	Standard Quantity
NVS-EN30PS-D	PENDANT SPEAKER ,30W (BLACK)	01

ACCESSORIES INFORMATION

Description	Standard Quantity
User Manual	01