



Catalog Number
Notes
Type

Contractor Select™

OALS10 LED

LED Area Light Standard

OALS LED provides bright illumination in outdoor spaces and is ideal for enhancing security around parking areas, walkways, yards, patios, play areas and driveways. The dusk-to-dawn photocell automatically turns light on at dusk and off at dawn for convenience and energy savings. Built tough with a weather and rust-resistant die-cast aluminum housing, this luminaire can endure harsh weather environments ensuring its durability and performance even in the most challenging weather conditions.

FEATURES:


- LED lamp included
- Dusk-to-dawn photocell
- Aluminum housing for rust-resistant durability
- 10" diameter acrylic lens for wide-spread, uniform illumination



Catalog Number	UPC	Description	Lumens	Input Watts	CCT	CRI	Voltage	Dusk-to-Dawn Operation	Options
OALS10 LED 120 PE LP M4	00197589359442	OALS10 LED Security Light	3,500	35	5000K	80	120	Photocell	T100 LED Lamp Included

Accessories: Order as separate catalog number.

OMA	Mounting Arm
CI Code	*136XUY
UPC Code	00745973700907

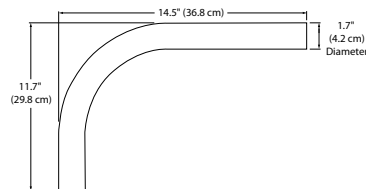



Specifications

INTENDED USE:

Provides bright illumination for residential and light commercial outdoor applications. Ideal for security lighting around parking areas, walkways, yards, patios, play areas and driveways.

CONSTRUCTION:

Rugged weather & rust resistant die-cast aluminum housing withstands harsh weather environments. 10" diameter prismatic acrylic lens provides wide-spread, uniform illumination. Includes (1) T100 self-ballasted lamp. Dusk-to-dawn photocell automatically turns light on at dusk and off at dawn for convenience and energy savings.

Minimum starting temperature -20°C~45°C.

INSTALLATION:

Wall or pole mount.

15" mounting arm accessory is available (order separately), and can be used to extend the fixture 15" from a wall or post.

All mounting hardware included.

LISTINGS:

CUL Certified to US and Canadian safety standards. Wet location listed.

WARRANTY:

1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

All dimensions are inches (centimeters)

