

## ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.  
However, the installation instructions do apply to this product.

**HD83691**

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

### ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. End of pipe nipple screw(C) into single bar (D), place lock washer (B) over end of nipple protruding through single bar and lock it securely with the hex nut (A). Take this single bar assembly to junction box with junction box screws (E), tighten screws securely with screwdriver. The side of the single bar marked "GND" must face to out. **The junction box is not included.**
4. Holding the end cord of lamp holder(H), through the canopy's cone shape coupling, by measuring, determine correct cord length of needed for proper hanging height, then lock it securely with the small screw. **NOTE: SLIDE WIRE CLIP TO THE PROPER POSITION, THEN YOU MAY PROPERLY CUT THE CORD TO DESIRED LENGTH. CONNECT THE ELECTRICAL WIRES AS SHOWN IN FIG.2.**
5. While holding the lamp body towards the ceiling, connect the electrical wires as Shown in Fig.2, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the single bar with the green screw provided. This lamp body provided two copper ground wires, one copper ground wire connects cord's ground wire, other one copper ground wire connects outlet's ground wire or mounting plate's green screw. After wires are connected, tuck them carefully inside the Junction Box.
6. Raise the lamp body onto the junction box, aligning pipe thread on single bar with mounting hole in canopy and lock it securely with the ball nut(G). Raise the glass(I) to the lamp holder(H), lock it securely with the check ring(J).
7. Install the light bulbs(Not included) in accordance with the fixture's specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAG!**

**Your installation is now complete. Return power to the junction box and test the fixture.**

FIG.1


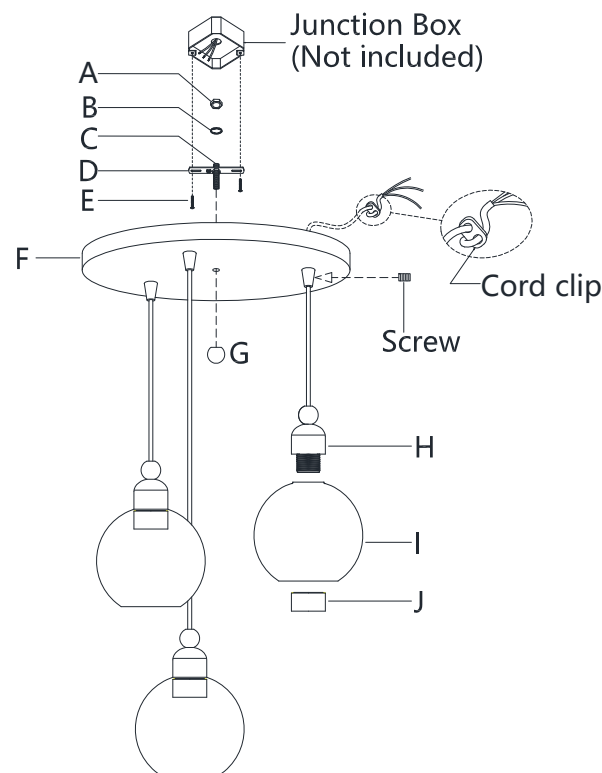


Fig.2

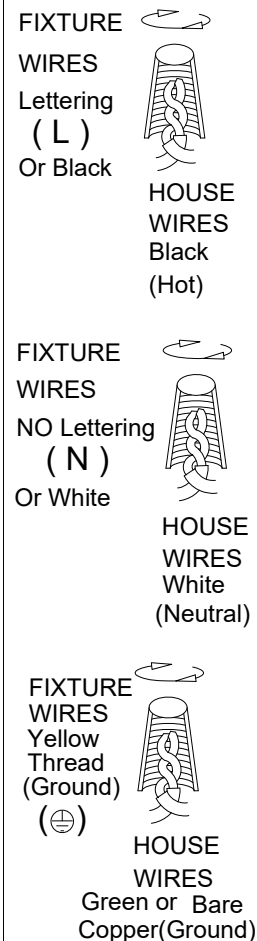

Thank you for purchasing an **AVIANCE** product.  
Need assistance with parts or assembly? Please email customer service  
at: [info@aviancelighting.net](mailto:info@aviancelighting.net)