


Installation Manual

Firstly be sure to decide whether the wire bundle need to be towards the driver side or passenger side by testing when signals lights work properly.



Peel

After cleaning and dry the mounting surface. Peel off the adhesive tape at the back.

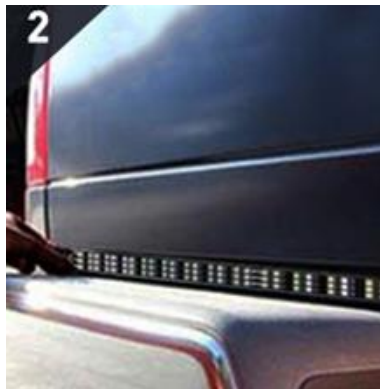

Stick

According to the mounting direction of the wire bundle, stick the light bar to the recessed area between the bottom of the tailgate and the bumper shelf.



Electrical Hook-up

Plug and play the standard flat 4-pin connectors, connect the reverse wire to a 12V DC positive power source.



Additional Hardware

You can also add on an additional mount and screws we provide to secure the light bar.