

# **Underscore®**

60" x 30" alcove bath **K-20201-LA** 

#### **Features**

- Convenient 19" step-over height retains the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron creates a clean, finished look
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface

#### Material

Acrylic

## Installation

- Left drain
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Alcove

## **Required Products/Accessories**


K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

#### **Recommended Products/Accessories**

K-23726 Drain treatment
K-23732 Tub & shower cleaner
K-31797 Slotted overflow bath drain kit
K-31795 Slotted overflow above-the-floor bath drain kit



# ADA

## Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 ADA

# KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

Color tiles intended for reference only.

**Color Code Description** 


0 White





# **Underscore®**

60" x 30" alcove bath **K-20201-LA** 

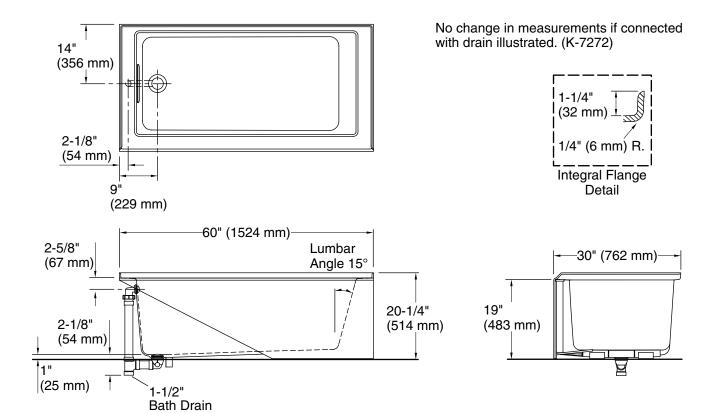

#### **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Left

Basin area, bottom: 46-1/4" x 22" (1175 mm x 559 mm)
Basin area, top: 52" x 24" (1321 mm x 610 mm)

Weight: 100 lbs (45.4 kg)

Minimum floor load: 56 lbs/ft² (273.4 kg/m²)

Water depth: 15-1/2" (394 mm)

Water capacity: 68 gal (257.4 L)

Minimum flat for 2-3/4" (70 mm)

door:

#### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.

