


COMFORT METER MANUAL

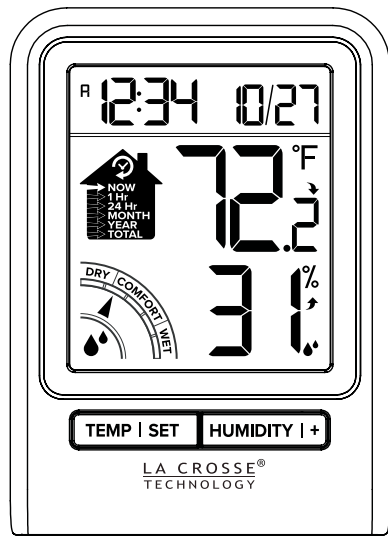


MODEL: 302-1409BW-W
DC: 1040121

For more product information visit: bit.ly/laxtech_support

POWER UP

1. Insert 2-AAA batteries into your Comfort Meter.
2. Adjust time and date settings as necessary.



Comfort Meter
308-1409BW-W

SETTINGS MENU

1. Hold the **TEMP | SET** button to enter the Settings Menu.
2. Use the **HUMIDITY | +** button to adjust values.
3. Press the **TEMP | SET** button to confirm.

Settings Menu order:

- 12/24 Hour Time
- Hour
- Minutes
- Year
- Month
- Date
- Month/Date or Date/Month
- Fahrenheit/Celsius

TEMPERATURE & HUMIDITY RECORDS

1. Press the **TEMP | SET** button to view HI and LO Temperature Records with time and date.
2. Press the **HUMIDITY | +** button to view HI and LO Humidity Records with time and date.

NOW: Current temperature & humidity readings. Display will default back to these values.

1 Hr: 1 Hour records, update at the top of each hour.


24Hr: Daily records, update daily at 12am midnight.

MONTH: Current month records, update at 12am each day. Reset on the first day of each new calendar month.

YEAR: Current year records, update at 12 am each day. Reset at the start of each new calendar year.

TOTAL: Records since the unit was first power on or last reset. These update at the top of each hour.

24 Hour Temperature HI and LO 24 Hour Humidity HI and LO

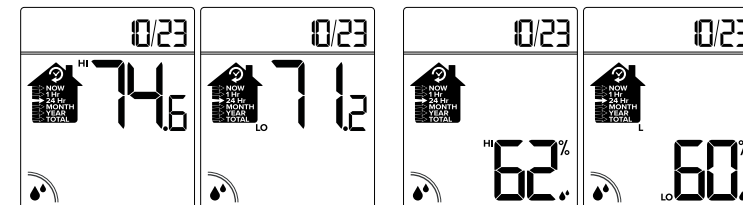


Reset HI | LO Records:

- 1. Press the TEMP | SET or HUMIDITY | + button to view records.
- 2. While viewing records, hold the TEMP | SET or HUMIDITY | + button to reset to current values.

INDOOR COMFORT INDICATOR


The Indoor Comfort Indicator is based on your Indoor Humidity. The Arrow will indicate comfort level.

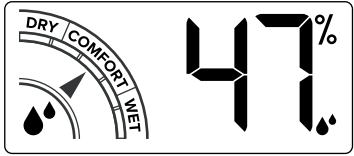


Too Dry	1% to 25%
Dry	26% to 39%
Comfort	40% to 75%
Wet	76% to 83%
Too Wet	84% to 99%


TEMPERATURE/ HUMIDITY TREND ARROWS

The temperature (2°F / 1°C) and humidity (3%) trend indicators update every 15 minutes. The trend reflects changes over the past 3 hours.

 Temperature or humidity has risen

 Temperature or humidity has fallen

LOW BATTERY INDICATOR

When the Low Battery Indicator  appears on the screen, replace the batteries in your Comfort Meter.

WE’RE HERE TO HELP!

If you require additional support, get in touch with our friendly customer support team based out of La Crosse, WI.


Phone: 1-608-782-1610

Online: bit.ly/contact_techsupport

Our knowledgeable customer support team is available:
Monday-Friday, 8am-6pm CST.

JOIN THE CONVERSATION

Ask questions, watch detailed setup videos, and provide feedback on our social media outlets!

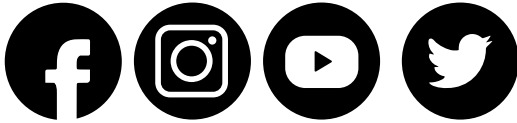

SPECIFICATIONS

Temperature Range: 32°F to 99°F (0°C to 37°C)

Humidity Range: 10% to 99% RH

Update Interval: About every 60 seconds

Power: 2 “AAA” (LR3, IEC) batteries (sold separately)

Battery Life: Over 24 months

Dimensions: 2.63” L x 1.35” W x 3.67” H
(6.68cm L x 3.43cm W x 9.32cm H)

WARRANTY INFO

La Crosse Technology, Ltd. provides a **1-year limited time warranty** (from date of purchase) on this product relating to manufacturing defects in materials & workmanship.

La Crosse Technology, Ltd, 2830 S. 26th St., La Crosse, WI 54601

For Full Warranty Details, Visit: www.lacrossetechnology.com/pages/warranty

CARE + MAINTENANCE

- Do not mix old and new batteries.
- Do not mix Alkaline, Lithium, standard, or rechargeable batteries.
- Always purchase the correct size and grade of battery most suitable for intended use.
- Clean the battery contacts and also those of the device prior to battery installation.
- Ensure the batteries have with correct polarity (+ / -).
- Remove batteries from equipment that will not to be used for an extended period.
- Promptly remove expired batteries.

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

All rights reserved. This manual may not be reproduced in any form, even in part, or duplicated or processed using electronic, mechanical or chemical process without the written permission of the publisher. This booklet may contain errors or misprints. The information it contains is regularly checked and corrections are included in subsequent editions. We disclaim any responsibility for any technical error or printing error, or their consequences. All trademarks and patents are recognized.

 **WARNING:** This product can expose you to chemicals including styrene, which is known to the State of California to cause cancer. For more information go to: www.P65Warnings.ca.gov