

## Introducing Extra I-Tap

Timeless design meets advanced filter technology in a stylish tap dispenser.

- Elegant design in durable stainless-steel
- Choice of four refreshing water types: unchilled and chilled still, chilled semi-sparkling and sparkling
- Choice of two capacities
- The dispenser conceals its powerful BRITA filtration technology and cooler capacity under the counter
- Outstanding hygiene through BRITA HygienePlus option – trusted by the healthcare industry for 20+ years



\*\*applies to BRITA Top Pro

# Extra I-Tap

Timeless design meets advanced filter technology in a stylish tap dispenser.



**ThermalGate™**  
powerful thermal-  
disinfection feature



**PureProtect**  
smart self-cleaning  
feature



**The optional BRITA HygienePlus  
fourfold safeguard** is designed  
for environments with stringent  
hygiene requirements. This  
protects your dispenser from  
contamination and germs



Our water dispensers produce  
86% less CO<sub>2</sub> emissions than  
pre-bottled water and 64% less  
than bottled water dispensers



**Intuitive glass touch pad**  
with pre-set portion control  
for glasses or bottles

**Choice of two capacities**

**High-quality materials:**  
Elegant design in durable  
stainless-steel

**Focus on sustainability:**  
natural refrigerant and  
extremely low power  
consumption



The **Easy Access Panel** helps create  
a barrier-free, inclusive working  
environment. The optional control  
unit can be positioned to provide  
easy access for wheelchair users

[Watch our Video on Youtube](#) →

Contact us today and let's talk about your  
BRITA water dispenser solution | [www.brita.net](http://www.brita.net)

**BRITA**


Two heights  
• Short tap  
• Tall tap




# Extra I-Tap



## Technical data



Model	Extra I-Tap still + sparkling	
Design / Type	Tap System: I-Tap	Easy Access Panel
Types of water	   	   
Configuration options		
Hygiene feature	BRITA ThermalGate™ or BRITA HygienePlus	
Tap height	tall tap (330 mm dispensing height) short tap (260 mm dispensing height)	
For installation in barrier-free environments		Easy Access Panel
For installation without waste water connection	waste water container	
Specifications		
Cooling capacity	L cooler: 10–60 regular users XL cooler: 20–100 regular users	
Dimensions of undercounter appliances (W x H x D)	272 x 490 x 473 mm	
Dimensions of tap incl. drip tray (W x H x D)	short tap: 132 x 385 x 216 mm tall tap: 132 x 453 x 216 mm	flat: 80 x 7 x 80 mm angled: 80 x 67 x 80 mm
Weight	tap: 2.5 kg undercounter appliance (L cooler): 33 kg undercounter appliance (XL cooler): 38.5 kg	0.5 kg
Max. power consumption	I-Tap with L cooler: 440 W I-Tap with XL cooler: 540 W	
Max. flow rate, still water	2 l/min	
Max. flow rate, sparkling water	1.6 l/min	



## CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

### Reduces:

- particles such as microplastics and sand
- per- and polyfluoroalkyl substances (PFAS)
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres
- removes bacteria and microbial cysts




# CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Mains water is strictly controlled. But healthcare and similar environments where hygiene is of the utmost importance demand an extra level of safety. CLARITY Protect delivers this through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “standard” filter.

## CLARITY Protect reduces:

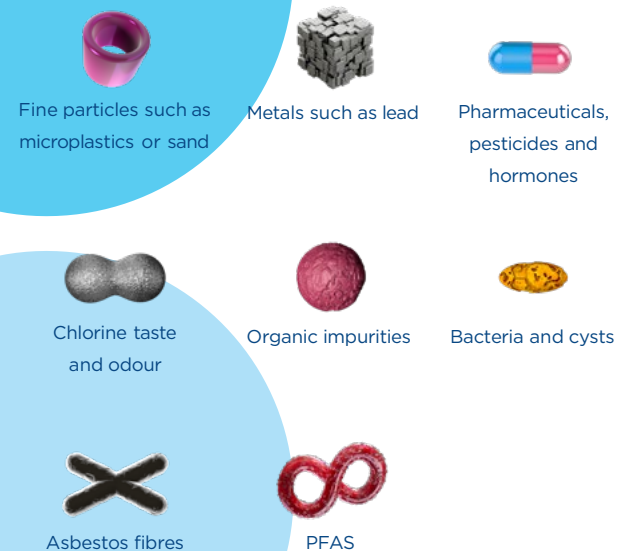

Contact us today and let's talk about your  
BRITA water dispenser solution | [www.brita.net](http://www.brita.net)



**The right balance**  
Preserves minerals  
in water

**Activated carbon  
filtration**  
Reduces substances  
that impair taste and  
odour

**Pre-filter**  
Removes particles



**Hollow fibre membrane**  
Nominal pore size of  
0.15µm filters out  
99.999% of bacteria  
and 99.95% of cysts

**Filter capacity:**  
Protect: 11,500 l

Exceptionally clean,  
safe water

**Protects equipment**  
lowering dispenser  
maintenance costs



# CLARITY Protect



## Technical data



Model	BRITA CLARITY Protect 100
Technology	activated carbon and hollow fiber membrane filtration
Water intake temperature	4°C to 30°C
Ambient temperature for operation	4°C to 40°C
Ambient temperature for storage / transport	-20°C to 50°C
Water inlet and outlet connection	JG 8 mm
Operating pressure	2 bar to 8.6 bar
Flow rate at 1 bar pressure loss	180 l/h
Nominal filter capacity	11,500 l
Operating position	horizontal or vertical
Efficacy	
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)
Reduction of PFAS	> 99% (NSF 53 testet by independent laboratory)
Reduction of metals such as lead	> 90% (DIN EN 14898)
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)
Reduction of organic impurities such as benzene	> 90%
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	> 90% up to at least 8,000
Reduction of bacteria	99.999% (ASTM F838-20)
Reduction of cysts	99.95% (NSF 53)
Dimensions (W x D x H)	
Filter system (filter head with filter cartridge)	68 x 68 x 338 mm
Filter cartridge	68 x 68 x 311 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 371 mm