



ASSEMBLY INSTRUCTION

speakON® Chassis Connector

NL4MP*-ST



ATTENTION: speakON is NOT to be used as an mains or power supply connector!

A

ASSEMBLY INFORMATION

1

CONNECTION

2




WIRING

3

PANEL CUTOUT (Rear Side)

Screw terminals with clamping device:


- Max. Wiresize 4 mm² / AWG 12
- Screw driver POZIDRIV #1
- Max. torque 0.5 Nm (0.37 lb-ft).

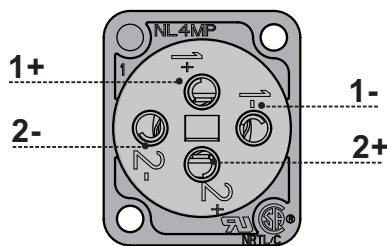

MOUNTING



ATTENTION
Maximum allowable torque M_A



(screws not included)

Rear assembly

Front assembly

NL4MP-ST

Countersunk thru holes for countersunk machine screws (e.g.: M3, 4-40)

90 Ncm

60 Ncm

B

More Information on the www.neutrik.com

<https://www.neutrik.com/en/products/audio/speakon>



Neutrik AG
Neutrik USA Inc.
Neutrik (UK) Ltd.
Neutrik Vertriebs GmbH

LI
USA
UK
DE/NL/AT/DK

T: +423 / 237 24 24
T: +1 704 / 972 3050
T: +44 1983 / 811 441
T: +49 8131 / 280 890

F: +423 / 232 53 93
F: +1 704 / 438 9202
F: +44 1983 / 811 439
F: +49 8131 / 280 830

Neutrik France
Neutrik Tokyo Ltd.
Neutrik Hong Kong Ltd.
Neutrik India Pvt. Ltd.

FR
JP
HK
IND

T: +33 1 / 4131 6750
T: +81 3 / 3663 4733
T: +852 / 2687 6055
T: +91 / 982 05 43 424

F: +33 1 / 4131 0511
F: +81 3 / 3663 4796
F: +852 / 2687 6052
F: +91 / 22 26163 540

Draft. Nr.: BDA 620 V1 | Update: 2020-10-22 | Data subject to change without prior notice. ©2020 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.

www.neutrik.com

NEUTRIK®