



GVM

Great Video Maker

GVM-S185

CONTENTS

Product Introduction	Page 1
Disclaimers	Page 1
Product Parameter	Page 2
Product Structure Diagram	Page 3
Installation Method	Page 4
Function Introduction & Instructions For Use	
.....	Page 5~8
Precautions	Page 9
Packing List	Page 9

PRODUCT INTRODUCTION

The GVM-S185 is a tripod designed by GVM specifically for videographers and filmmakers.

The three-stage design with the adjustable height, range from 85cm to 185cm can meet the different needs of users in various shooting environments. Maximum load capacity of 10KG and quick-release plate provide compatibility and convenience for quick installation and removal of most cameras and camcorders on the market. The attached quick plate is equipped with 1/4" and 3/8" screws make it easy to use with various cameras for a seamless shooting experience.

DISCLAIMERS

1. To maximize the benefits of your tripod, please read the manual thoroughly before using the product. Failure to follow the instructions and warnings provided in this document could result in damage to the product as well as potential harm to you and others, or surrounding items.
2. By using this product, you are deemed to have carefully read the disclaimer and warning, understand and acknowledge all the terms and contents of this statement, and promise to take full responsibility for the use of this product and the possible consequences.
3. Design and specifications are subject to change without notice.

PRODUCT PARAMETER

- ◆ Model: GVM-S185
- ◆ Weight: 4.4kg
- ◆ Sections: 3
- ◆ Pipe Diameter: 18/16mm
- ◆ Minimum Height: 85cm
- ◆ Maximum Height: 185cm
- ◆ Storage Height: 90cm
- ◆ Maximum Load Capacity: 10kg
- ◆ Head Type: Hydraulic Fluid head
- ◆ Leg Type: Three legs
- ◆ Leg Lock Type: Knob lock
- ◆ Material: Aluminum alloy

PRODUCT STRUCTURE DIAGRAM



Pan Bar Locking Knob

Quick Release Plate Locking Knob

Quick Release Plate

QR Plate Release Button

Tilt Lock

Bubble Level

Pan Lock

Base

Pan Bar

INSTALLATION METHOD

Install the pan bar onto the fluid video head as shown below. Adjust the handle to a proper Angle and tighten the fixing knob of the handle to install the handle on the fluid head. (The pan bar can be inserted to the rosette style mounting point on either sides of the fluid head according to individual needs.)



FUNCTION INTRODUCTION & INSTRUCTIONS FOR USE


① Tripod legs expansion and retraction

Pull the feet of the tripod outward to unfold the tripod legs;
Push the tripod's feet inward to fold the tripod legs in.



② Height Adjustment

Loosen the locking knobs to adjust the height of the tripod, after adjusting to the desired height, tighten locking knobs to fix the tripod in place.

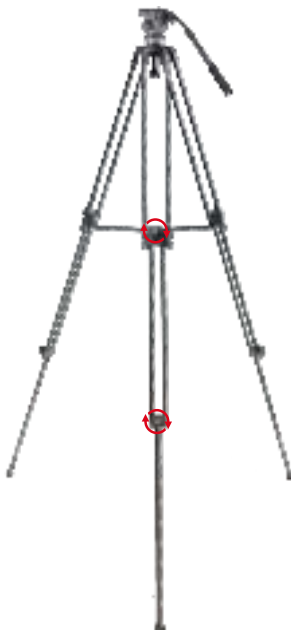

③ Quick Release Plate Installation and use


The indent structure of the quick-release plate features a safety pin mechanism designed to prevent equipment from slipping due to accidental mis-operation or human error.

Removing the quick release plate:

Loosen the QR plate locking knob, press and hold the red safety button (Slide towards either direction) to remove the Plate.

Attaching the quick release plate:

As shown in the installation diagram below, Slide in the quick release plate to the slot on the fluid head, and then lock the quick release plate locking knob.

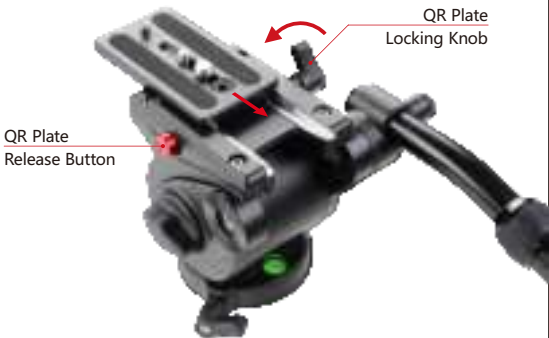

④ Tilt & Pan adjustment

Tilt angle adjustment:

Loosen or tighten the knob **①** to adjust the tilt 1 angle of the fluid head.

Pan angle adjustment:

Loosen or tighten the knob **②** to adjust the horizontal pan angle of the fluid head.



PRECAUTIONS

1. Do not exceed the specified maximum load when using this product.
2. When using the monopod, ensure that the tripod shaft is securely locked in a safe position.
3. Do not operate at temperatures below minus 20 degrees Celsius and above 70 degrees Celsius. When in a humid, sand, dust environment, please wipe off the monopod with a dry cloth after use. If used in a rainy environment, fully extend the tube sections to allow it to dry completely. It is recommended to leave it out for a few days till the moisture fully evaporates before storing it away. Avoid using the monopod in environments with seawater.
4. Exercise caution when using in dangerous terrain or environments.
5. Avoid intensive movements while a camera or a camcorder is attached to the monopod.
6. The product does not require lubricants. However, if lubrication is necessary in certain situations, please use standard lubricating oil or grease.
7. To ensure personal safety, avoid contact with electronic devices, high-pressure equipment, or strong chemicals while using the product.

PACKING LIST

Name	Quantity	Remark
Tripod	1	
Fluid Video Head	1	
Carry Bag	1	

**QC
PASS**



GVM Official Website



Facebook

Huizhou Latu Film Equipment Co., Ltd.

Web: www.gvmled.com

B&H Email: bh@gvmled.com

GVM Email: support@gvmled.com

Amazon Email: amazonsupport@gvmled.com

Warehouse Address: 12285 MCNULTY RD, STE 105 PHILADELPHIA, Pennsylvania 19154, USA