


Solderless splices

PARALLEL

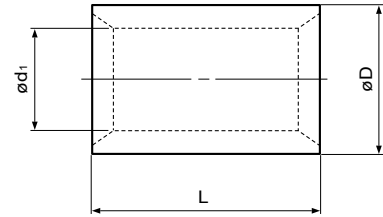

Non-insulated



Certificate No.: E42024 LR20812 JQ0607002

Applicable Wire AWG#(mm ²)	Part No.	Standard	Dimensions mm (in.)			Tool No.												Qty/box
			L	ø D	ø d1	YHT-2210	YHT-8S	YA-1	YA-2	YA-4	YA-5	YPT-60N	YPT-150-1	E-4,YF-1 YET-40-1	E-4,YF-1 YET-150-2	E-4,YF-1 YET-300-1	E-4,YF-1 YET-300N	
22 to 16 (0.25 to 1.65)	P-1.25		8.0 (.315)	3.3 (.130)	1.7 (.067)	o		o	o	o								1,000
16 to 14 (1.04 to 2.63)	P-2		8.0 (.315)	4.1 (.161)	2.3 (.091)	o		o	o	o								
12 to 10 (2.63 to 6.64)	P-5.5		8.5 (.335)	5.4 (.213)	3.4 (.134)	o		o	o	o								
8 (6.64 to 10.52)	P-8		9.5 (.374)	7.0 (.276)	4.5 (.177)		o			o	o	o	o	o	o			500
6 (10.52 to 16.78)	P-14		11.0 (.433)	8.9 (.350)	5.8 (.228)					o	o	o	o	o	o			200
4 (16.78 to 26.66)	P-22		13.5 (.531)	11.3 (.445)	7.7 (.303)						o	o	o	o	o			100
2 (26.66 to 42.42)	P-38		16.5 (.650)	13.2 (.520)	9.4 (.370)						o	o	o	o	o			
1/0 (42.42 to 60.57)	P-60		19.0 (.748)	15.3 (.602)	11.4 (.449)						o	o	o	o	o	o	o	
2/0 (60.57 to 76.28)	P-70		19.0 (.748)	17.5 (.689)	13.3 (.524)							o	o	o	o	o	o	50
3/0 (76.28 to 96.3)	P-80		19.5 (.768)	19.5 (.768)	14.5 (.571)							o	o	o	o	o	o	25
4/0 (96.3 to 117.2)	P-100		22.1 (.870)	22.1 (.870)	16.4 (.646)							o	o	o	o	o	o	
350MCM (152.05 to 192.6)	P-180		28.5(1.122)	28.5(1.122)	21.0 (.827)											o	o	20
400MCM (192.6 to 242.27)	P-200		32.0(1.260)	32.4(1.276)	24.0 (.945)											o	o	10
N.A. (250)	P-250		32.0(1.260)	35.0(1.378)	26.0(1.024)											o		
600 to 650MCM (242.27 to 325)	P-325		37.0(1.457)	37.0(1.457)	28.0(1.102)											o	o	

Note: 1) Products with the JIS mark conform to JIS C2806.

2) "Applicable Wires" indicates the total cross-sectional area.

3) Delivery lead times may vary depending on the product. Contact JST for details.

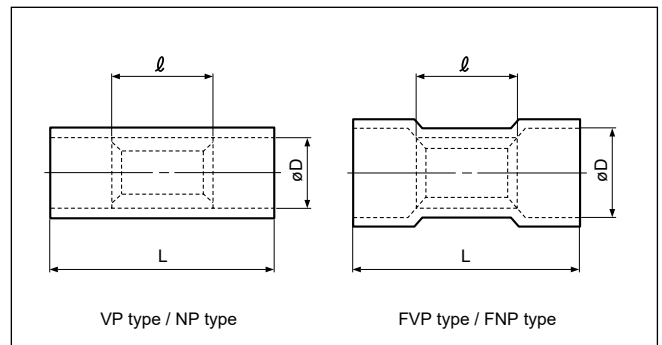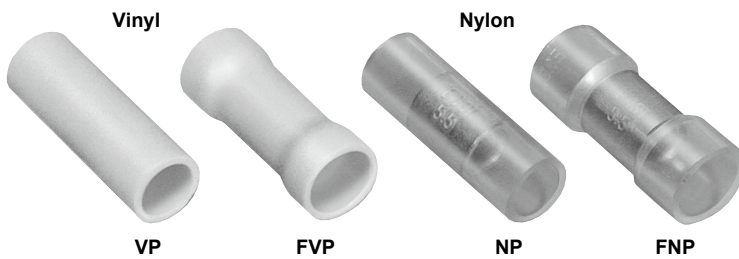

Vinyl or Nylon insulated

Certificate No.: E42024 LR20812

Applicable Wire AWG#(mm ²)	Part No.		Standard	Dimensions mm (in.)			Color	Tool No.						Qty/box	
	Vinyl	Nylon		L	ℓ	ø D		YNT-2216	YNT-1614	YNT-1210S	YA-1	YA-2	YA-4	Vinyl	Nylon
22 to 16 *(0.25 to 1.65)	VP-1.25	NP-1.25		16.0 (.630)	8.0 (.315)	3.2 (.126)	Red	o			o	o	o	1,000	
	FVP-1.25	FNP-1.25				4.0 (.157)									
16 to 14 (1.04 to 2.63)	VP-2	NP-2		16.0 (.630)	8.0 (.315)	3.9 (.154)	Blue		o		o	o	o	1,000	
	FVP-2	FNP-2				4.5 (.177)								1,000	500
12 to 10 (2.63 to 6.64)	VP-5.5	-		20.5 (.807)	8.5 (.335)	5.4 (.213)	Yellow			o			o	500	
	FVP-5.5	FNP-5.5				6.8 (.268)								500	250

Note: 1) *The crimping will be more secure if the total cross-sectional area of the wire is at least 0.5 mm².Examples: If the cross-sectional area of the wire is 0.3 mm², fold the wire in two when crimping the terminal.If the cross-sectional area of the wire is 0.5 mm², crimp the terminal onto the wire as it is.

2) "Applicable Wires" indicates the total cross-sectional area.

3) Delivery lead times may vary depending on the product. Contact JST for details.

