

# **MARQUANT 003344 Alarm Clock Instruction Manual**

Home » MARQUANT » MARQUANT 003344 Alarm Clock Instruction Manual



#### Contents

- 1 MARQUANT 003344 Alarm
- Clock
- **2 OPERATING INSTRUCTIONS**
- **3 TECHNICAL DATA**
- **4 DESCRIPTION**
- 5 USE
- **6 SETTINGS**
- 7 ALARM
- 8 SWITCHING FROM °C TO °F
- 9 BACKLIGHT
- 10 SWITCH FOR LIGHT SENSOR
- 11 Documents / Resources
- **12 Related Posts**



# **MARQUANT 003344 Alarm Clock**



# **OPERATING INSTRUCTIONS**

Important! Read the user instructions carefully before use. Save them for future reference. (Translation of the original instructions).

# **TECHNICAL DATA**

Battery: 2 x1.5 V AAA

# **DESCRIPTION**



- 1. Snooze
- 2. Time
- 3. Button SNOOZE/LIGHT

- 4. Light sensor
- 5. Time to set off alarm
- 6. Date (month/day)
- 7. Temperature
- 8. Switch for light sensor
- 9. Alarm selector
  - · WORK AL. ON
  - AL. ON
  - · AL. OFF
- 10. Button 12/24/YEAR
- 11. Button TEMP/MIN/DATE
- 12. Button HOUR/MONTH
- 13. Selector (4 modes)
  - LOCK
  - TIME SET
  - DATE SET
  - AL.SET
- 14. Battery cover

### USE

## REPLACING THE BATTERY

- 1. Open the battery cover by pushing it down.
- 2. Remove the old battery by pulling the black band.
- 3. Insert new 1.5 V AAA batteries with the correct polarity as shown by the markings in the battery compartment. The black band should lie under the first battery to simply taking it out.
- 4. When the batteries are inserted a short audio prompt will be heard and all the symbols are shown on the display. The display then shows 12:00 AM.
- 5. Replace the cover.

#### **SETTINGS**

- 1. The long line on the selector shows the selected function.
- 2. Press the button for at least 3 seconds to increase/reduce the setting.
- 3. Put the selector in LOCK mode to confirm the settings.

# Time

- 1. Put the selector in TIME SET mode. The digits for the time flash.
- 2. Set the hour with the HOUR/MONTH button. Set the minutes with the TEMP/MIN/DATE button.

## 12/24 hour display

- 1. Put the selector in LOCK mode.
- 2. Push the 12/24/YEAR button to select 12/24 hour display.

#### **Date**

- 1. Put the selector in DATE SET mode. The digits for year and date start flashing.
- 2. Set the year with the button 12/24/YEAR.
- 3. Set the date with the TEMP/MIN/DATE button.
- 4. Set the month with the HOUR/MONTH button.

#### **ALARM**

#### NOTE:

- For the first 10 seconds the alarm is 1 audio prompt per second.
- If the alarm is not switched off within 10 seconds it switches to 2 audio prompts per second for the next 10 seconds.
- If the alarm is not switched off within 20 seconds it continues with 2 audio prompts per second for the next 10 seconds and then 4 audio prompts per second.

## Setting the alarm

- 1. Put the selector for alarm on/off in AL. SET mode. The alarm time starts flashing.
- 2. Set the hour with the HOUR/MONTH button. Set the minutes with the TEMP/MIN/DATE button.
- 3. Put the selector for alarm on/off in LOCK mode to confirm the settings.

#### Enable/disable the alarm

- 1. Enable the alarm function by moving the selector for alarm on/off to one of the following modes:
  - AL.ON

The alarm is enabled for each weekday and MO-SU is shown in the display.

WORKAL.ON

The alarm is only enabled for Monday to Friday and MO-FR is shown in the display.

2. Disable the alarm function by moving the selector for alarm on/off to AL.OF F. mode

#### **Snooze button**

When the alarm goes off press the snooze button to switch off the alarm for the next 5 minutes.

#### Switching off the alarm

To switch off the alarm press any button except SNOOZE/ LIGHT.

# SWITCHING FROM °C TO °F

- 1. To switch the temperature unit put the selector in LOCK mode.
- 2. Press the TEMP/MIN/DATE button to change the temperature unit.


# **BACKLIGHT**

- The backlight goes on when the SNOOZE/LIGHT button is pressed.
- The backlight stays on for 5 seconds.

# **SWITCH FOR LIGHT SENSOR**

- Put the switch for the light sensor in ON mode to enable the backlight on the display in poor light.
- Put the switch for the light sensor in OFF mode to disable the backlight on the display in poor light.

# **Documents / Resources**

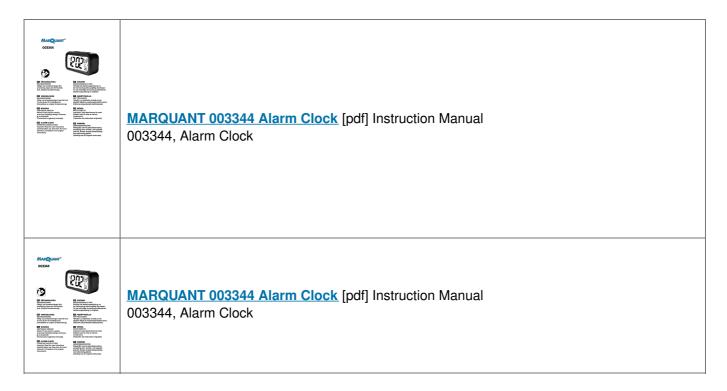

Manuals+,