



## MATCO TOOLS VERSAPRO3 3000 AMP Portable Power Unit With Jump Start Function Instructions

[Home](#) » [MATCO TOOLS](#) » MATCO TOOLS VERSAPRO3 3000 AMP Portable Power Unit With Jump Start Function Instructions 

### Contents



- [1 MATCO TOOLS VERSAPRO3 3000 AMP Portable Power Unit With Jump Start Function](#)
- [2 Specifications](#)
- [3 FAQ's](#)
- [4 WARRANTY REPAIR/REPLACEMENTS](#)
  - [4.1 LIMITED WARRANTY INFORMATION LIMITED WARRANTY](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)



**MATCO TOOLS VERSAPRO3 3000 AMP Portable Power Unit With Jump Start Function**



**WARNING:** Read all instructions and warning before using this product.

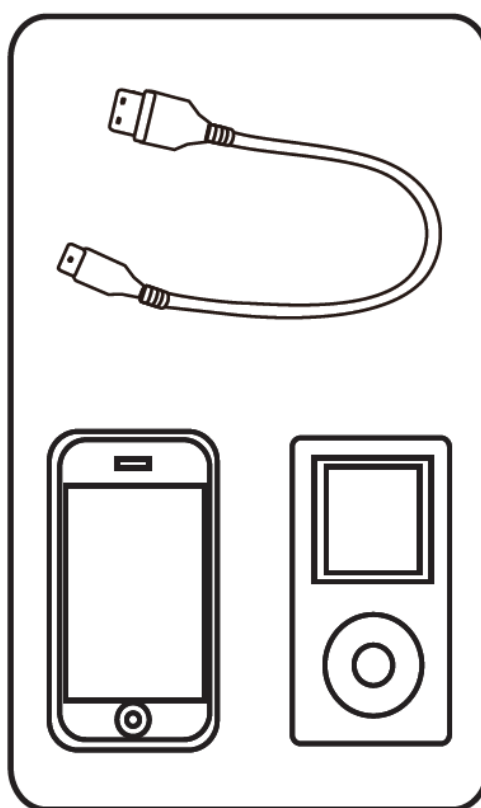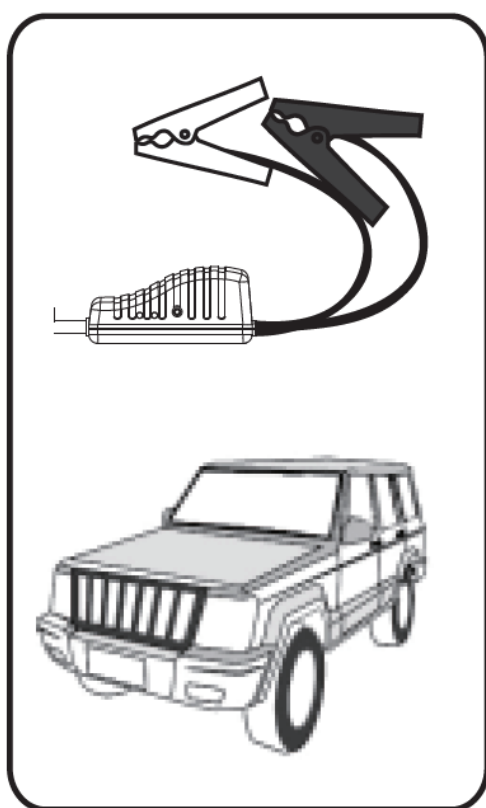

**WARNINGS:**

Read this entire manual before using this product.

This unit is intended for use with 12V SYSTEMS ONLY. Use on any other system will void the manufacturer's warranty.

DO NOT use this unit in place of a vehicle's battery.

DO NOT connect positive and negative clamps to one another.

DO NOT attempt to start a car for more than 30 seconds at a time. If the vehicle fails to start after three consecutive attempts, stop and allow the unit to cool for a minimum of five minutes to avoid potential overheating.

DO NOT expose this unit or any of its components to water, extreme cold, extreme heat or prolonged high heat.

DO NOT leave this unit unattended while in use or use in or around flammable objects.

DO NOT use this unit if you notice damage and/or swelling.

DO NOT modify or attempt to disassemble this unit or any components, as this will immediately render the warranty null and void and could cause unit damage, user injury, or even fire.

DO NOT attempt to start a vehicle while the unit is being charged.

ALWAYS make sure there is no corrosion or debris on the jump start cables plug-in before each use.

DO NOT charge unit at below 32°F or above 90° F.

DO NOT leave clamps attached to vehicle battery after vehicle has been started. Remove immediately.

DO NOT use attachments, cables, clamps, etc. not included with the unit or not approved by manufacturer. Doing so could cause damage to unit or even fire.

ALWAYS dispose of batteries and electronic devices properly and according to all local regulations.

**CAUTION:** If damaged or used under extreme conditions the unit could potentially leak fluid. If this liquid comes in contact with skin, wash with mild soap and lukewarm water immediately. If liquid from unit comes in contact with your eyes, rinse with cold water for 10 minutes and seek medical attention.

### **Safety features:**

- Overcharge and over-discharge protection
- Reverse polarity protection
- Fuse protection


### **Specifications**

- Model: VERSAPRO3
- Capacity: 77.7 Wh
- Peak Amps: 3000A
- Input/Output: USB-C (5V/3A)
- Outputs: Quick Charge Outlet USB (5V/3A, 9V/2A, 12V/1.5A), Standard Charge Outlet USB (5V/2.4A), DC Outlet 15V/10A, and 12V Jump Start
- Dustproof and Waterproof Rating: IP65

### **Components:**

- VERSAPRO3 power bank and jump starter unit
- Smart Cable – jump starting cables
- Charging cords (USB-C to USB and USB-C to USB-C)
- 12V DC adapter cord
- AC adapter
- Storage case


### **Functions and Features:**

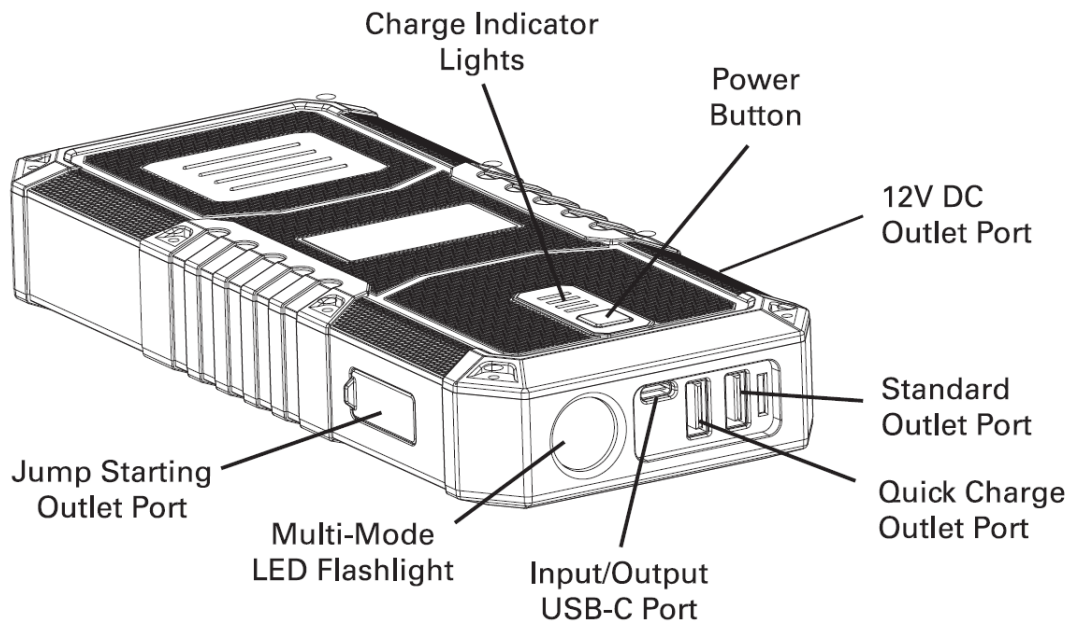


### **Starting a vehicle:**

1. Plug the blue connector end of the jump starting cables into the power outlet port labeled "JUMPER CABLE"; and make sure the cable indicator light is off.
2. Connect the red clamp to the positive (+) battery terminal and the black clamp to the negative (-) battery terminal. DO NOT let the clamps touch each other.
3. At this point, DO NOT press the BOOST button the jump start cable unit until instructions state you should.
4. If the red light illuminates and buzzing begins, you have reversed the clamps. Disconnect the clamps and confirm the clamps are attached to the proper battery terminals.
5. If there is no lights or sound, check the connection of the clamps before attempting to start the vehicle.
6. When green light is on, it is safe to start the vehicle.
7. When light is blinking, press the BOOST button and start the vehicle within 30 seconds.
8. Be sure to read the "Explanation of lights and alerts":
9. If the vehicle does not start after three attempts, stop and allow the unit to cool for at least two minutes. As this will assist in not overworking the unit.
10. Once the vehicle has been started. Remove the cables and unit within 30 seconds to avoid any possible damage to the unit. The engine should remain running after this step.


### **Cable Power Unit:**

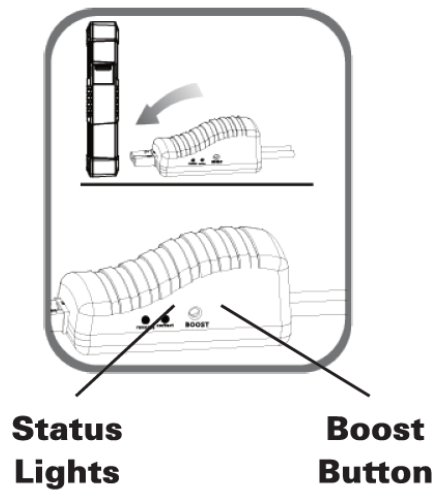


**Explanation of lights and alerts:**

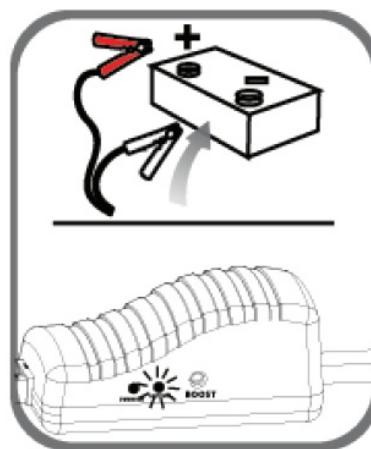


**GREEN LIGHT** on – Good connection and the circuit is working. You may attempt to start the vehicle at this point.

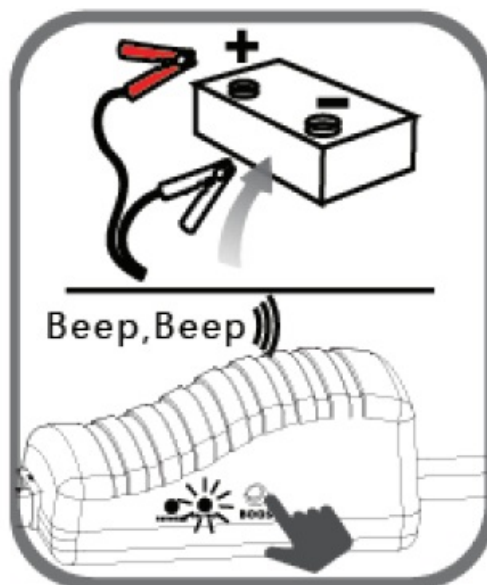

**GREEN LIGHT** blinking with buzzing -The vehicle battery is low. Press the BOOST button. When the light illuminates a steady green, start the vehicle within 30 seconds.

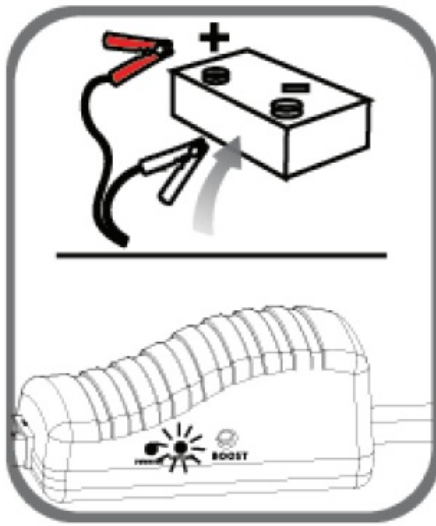

**RED LIGHT** on with buzzing -The connection is incorrect. The clamps are reverse of the correct set up. Refer to STEP 2 of the “Starting a Vehicle” instructions.  
Once the GREEN LIGHT is on, it is safe to start the vehicle.

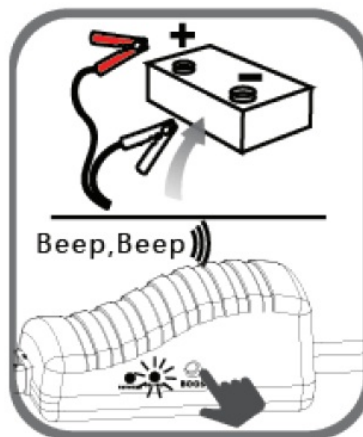


**No light and no buzzing** -The vehicle battery could be damaged or extremely low. Confirm the cables are properly connected. Press the BOOST button. When the light illuminates a steady green, start the vehicle within 30 seconds.

**NOTE:** If there is no response when pressing the POWER button, the power unit itself could be low on charge.



#### Charging the power unit: (with AC adapter included)

1. Charge the unit using the Input / Output USB-C port.
2. The charge of the unit should last 6-12 months without use.

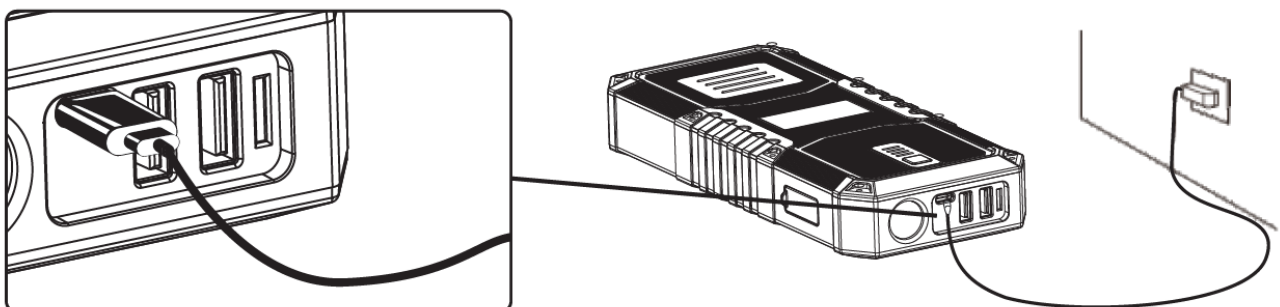

**Charging devices, such as phones and tablets:**

1. Plug the supplied cable into the device you want to charge and the other end into either the standard outlet port or the Quick Charge Outlet port.
2. The Quick charge outlet port will recognize your device and charge it accordingly.
3. Once you have connected the device to the unit, you may press the POWER button on the unit.

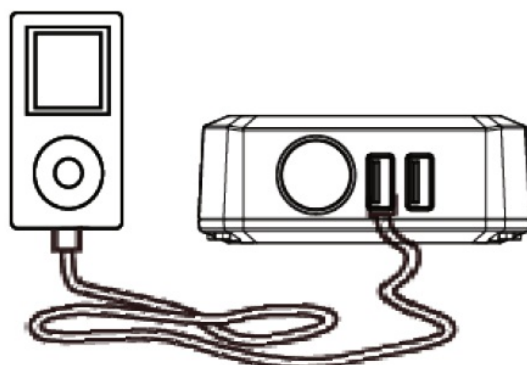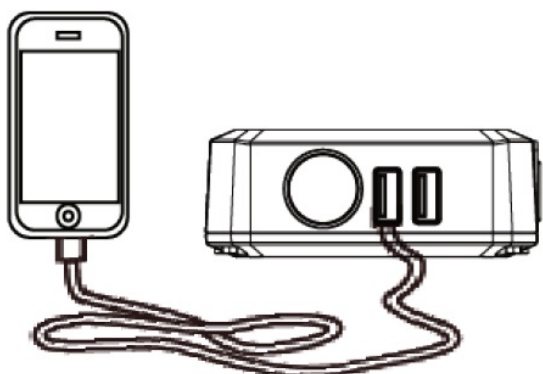

### **Charging using the 12V DC outlet**

1. Open the 15V/10A port and connect the DC adapter cord.
2. Connect accessory into the DC adapter.

### **Using the LED flashlight:**

1. Press and hold the POWER button for three seconds.
2. To change modes, press the POWER button again. The three modes are steady light, strobe and SOS.

### **FAQ's**

#### **Q. How do I turn off the power unit?**

A. The unit has an automatic shutoff. It shuts down when it detects no load or when charging is complete.

#### **Q. How long does it typically take to charge the power unit?**

A. Approximately 4 hours.

#### **Q. How many times should this jump start a vehicle from a full charge?**

A. It depends on the engine size, but using a 3.0L gasoline powered V6 as a reference, approximately 40 times.

#### **Q. What is the average lifespan of this power unit?**

A. With normal use, usually 3-5 years.

### **WARRANTY REPAIR/REPLACEMENTS**

For repair or replacement, contact customer service at 1-800-537-1077. DO NOT SHIP UNTIL YOU RECEIVE A RETURN MERCHANDISE AUTHORIZATION (RMA) number from customer service at Horizon Tool, Inc.

#### **NOTE:**

Save proof of purchase, such as a dated store receipt, to establish warranty period. Without a dated receipt, we will use the manufacturing date code. This warranty for the jump starter is extended to the original purchaser or user, and it covers defects in materials and workmanship for one year.

For malfunction due to defects in materials or workmanship prior to 6 months from the purchase date, we will repair or replace the unit at our discretion after inspection.



## LIMITED WARRANTY INFORMATION LIMITED WARRANTY

### NOTE:

The battery is covered under separate terms. The battery will be prorated monthly, over one year, from the end of the first month to the end of the twelfth month.

This applies only to batteries which have not been misused or abused, Typical failure modes of misused or abused battery are melted terminals or signs of overcharging.

This warranty is invalidated if any of the following occurs, but not limited to this list:

- Failure to follow instructions in the User Manual
- Accidental or unreasonable use or misuse
- Mishandling
- Extended storage without recharging
- Repairs by unauthorized person or modification
- Normal wear or accident

This warranty is in lieu of all other express warranties. Horizon Tool, Inc. will not be liable for consequential or incidental damages. Some states do not allow limitations on warranties. In such case, the above limitation may not apply.

### SERVICE ADDRESS

Horizon Tool, Inc.  
7918 Industrial Village Road  
Greensboro, NC 27409


### NOTE:

Whenever returning a product to this address, it must be packaged securely to avoid shipping damage. Horizon Tool, Inc. will not be responsible for any shipping or handling damage. Also, all postage or transportation must be prepaid.

### CUSTOMER SERVICE CONTACT

Horizon Tool, Inc.  
Service Department  
**Tel:** 1-800-537-1077  
**Fax:** 1-800-537-1717  
**Email:** [info@horizon-tool.com](mailto:info@horizon-tool.com)

## Documents / Resources

	<p><a href="#">MATCO TOOLS VERSAPRO3 3000 AMP Portable Power Unit With Jump Start Function</a> [pdf] Instructions</p> <p>VERSAPRO3 3000 AMP Portable Power Unit With Jump Start Function, VERSAPRO3, 3000 AMP Portable Power Unit With Jump Start Function, With Jump Start Function, Start Function</p>
---	--