

MaxiAIDS 124684 Radio Controlled Clock Alarm with Indoor Thermometer Instruction Manual

<u>Home</u> » <u>MaxiAIDS</u> » MaxiAIDS 124684 Radio Controlled Clock Alarm with Indoor Thermometer Instruction Manual

Contents [hide


- 1 MaxiAIDS 124684 Radio Controlled Clock Alarm with Indoor Thermometer Instruction Manual
- **2 FUNCTIONS INTRODUCTION**
- **3 MAIN FEATURES WITH CONTROL BUTTONS:**
- **4 ABOUT RADIO RECEPTION INSTRUCTIONS**
- **5 SETTING THE TIME AND CALENDAR MANUALLY**
- **6 SETTING ALARM**
- 7 Documents / Resources
- **8 Related Posts**

MaxiAIDS 124684 Radio Controlled Clock Alarm with Indoor Thermometer Instruction Manual

FUNCTIONS INTRODUCTION

- . U.S. Radio controlled dock (RCC) function
- Time display: Hour, Minute and Second. 12HR/24HR format.
- Alarm with 5-minute snooze function
- Date, Week, and indoor temperature display in C/F.
- Switch 4 different time zones(P-M-C-E) in U.S. .
- Daylight saving time (DST) function

MAIN FEATURES WITH CONTROL BUTTONS:

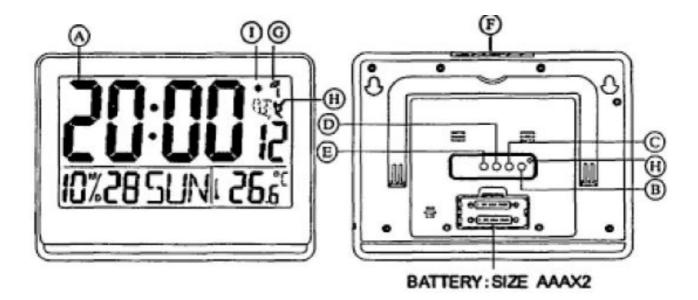

- (A) LCD
 - Displays time, date, week, temperature, zone.
- B MODEBUTTON
 - Press to change between time and alarm display modes
- © SET BUTTON
 - Press and hold for 2 seconds to enter the time and alarm setting mode
- UP |°C/°F | AL ON/OFF | BUTTON
 - -Advances the value of a setting.
 - -Selects display format in Centigrade (°C) and Fahrenheit (°F).
 - -Under alarm mode on/off alarm function.
 - Press and hold for 2 seconds the clock will forcibly receive RCC signal.
- (E) ZONE |DST| BUTTON
 - -Under time mode, press ZONE key to switch four different time zones in U.S.
 - Press and hold for 2 seconds to turn on/off DST.
- (F) SNZ(SNOOZE) BUTTON
 - Press to activate the Snooze function when the alarm goes off
- RADIO CONTROLLED SIGNAL ICON
- (H) ZONE ICON
- ① * DST ICON

ABOUT RADIO RECEPTION INSTRUCTIONS

1. Within the range of RCC signal, the dock will receive RCC and adjust time automatically

- 2. When the dock is electrified and reset to the default values, the clock will receive RCC automatically
- 3. Press UP/MANUAL key for 2 seconds, he dock will forcibly receive RCC.
- 4. When the clock is receiving radio signal, the radio reception icon will start to blink.



5. The clock will receive RCC at 2:00am, 3:00am, 4:00am automatically every day. If the clock receives RCC once, it won't receive it again that day, e.g. if the clock receives RCC at 2:00am, it won't receive RCC at 3:00am or 4:00am. Next day, it will receive RCC again automatically

SETTING THE TIME AND CALENDAR MANUALLY

- Under time display mode, press set key for 2seconds, the clock will enter into Time setting mode, press again
 to display following different setting modes in sequence: 12HR/24HR → hour→ minute → year→ month→
 day→confirmation
- 2. Under above setting mode, Press UP key to advance values, had the key to increase values quickly Press SET key to confirm the adjustment and return to time display mode.
- 3. Under above setting modes, if the clock is left untouched for 30 more minutes, the clock will return to the normal time display mode.

SETTING ALARM

- Press MODE key to enter into the alarm setting mode, press SET key for 2 seconds, the clock will enter into the alarm setting mode, press again to switch the following setting modes in sequence: hour → minute→ confirmation
- 2. Under above setting mode, Press UP key to advance values, hold he key to increase values quickly.
- 3. Under alarm display mode not setting mode, press UP key to turn on/off the alarm.
- 4. When the alarm is working, press SNZ key, the alarm will react after 5 minutes.
- 5. Under alarm display mode not setting mode, if the dock is left untouched for 1 minute, the dock will return to time display mode.

Read More About This Manual & Download PDF:

Documents / Resources



<u>MaxiAIDS 124684 Radio Controlled Clock Alarm with Indoor Thermometer</u> [pdf] Instruction Manual

124684, Radio Controlled Clock Alarm with Indoor Thermometer, 124684 Radio Controlled Clock Alarm with Indoor Thermometer

Manuals+, home

privacy