



MB QUART MBQRG-STG2-RC-1 Polaris Ranger Tuned Audio System Instruction Manual

[Home](#) » [MB QUART](#) » MB QUART MBQRG-STG2-RC-1 Polaris Ranger Tuned Audio System Instruction Manual



Contents

- [1 MB QUART MBQRG-STG2-RC-1 Polaris Ranger Tuned Audio System](#)
- [2 Installation Instructions](#)
- [3 Parts List](#)
- [4 Tools Required](#)
- [5 Dash Disassembly](#)
- [6 Harness Installation](#)
- [7 Assembly & Dash Radio Install](#)
- [8 FCC Notice](#)
- [9 WARRANTY](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)



MB QUART MBQRG-STG2-RC-1 Polaris Ranger Tuned Audio System



Installation Instructions

Model:	Polaris Ranger
Description:	Stage 2 Install
Part Number:	MBQRG-STG2-RAD-1 & MBQRG-STG2-RC-1
Assembly Time:	90 Min (1.5-Hours)

Before you begin, read through these instructions and check that all parts are present. Always disconnect the negative battery terminal prior to installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

	Parts List	
No.	Component Name	Qty
1	GMR-LED w/Housing (MBQRG-RAD-1) (MBQRG-STG2-RAD-1 Only)	1
2	6.5" Dash Speakers (MBQRG-FPOD-1)	2
3	Speaker Harness	2

Tools Required	
1	Bojo Tool
2	Panel Clip Pliers
3	1/8" Drill Bit
4	Drill
5	T25 Torx Bit
7	10mm Socket
8	Ratchet

Dash Disassembly

- Remove the hood by turning two latches



- Remove two push pins from the center cup holder



- Remove two push pins from the instrument cluster. Remove and disconnect the connector on the back




- Open the upper glove box and remove four T20 Torx screws and then lift the assembly out of the vehicle



- Remove three push pins on the passenger side dash



- Remove three push pins on the driver-side dash

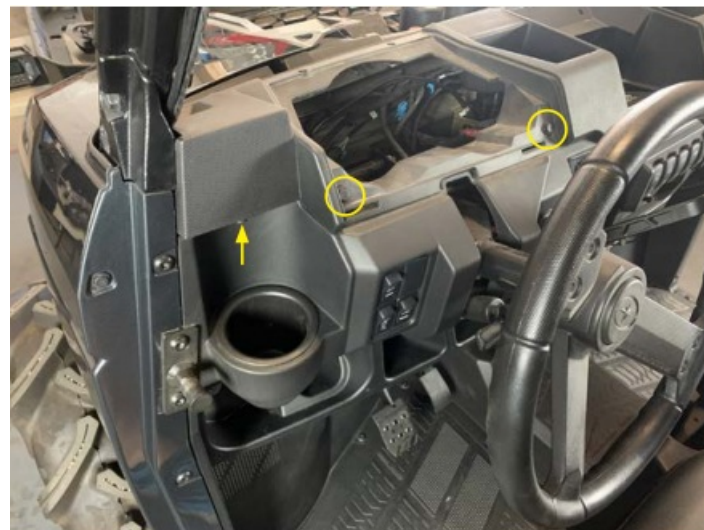

- Remove six push pins from the front of the dash




- Lift up on the dash and remove from vehicle



Harness Installation

- Install front speaker wires placing the four-pin connector in the middle of the dash and extend the white wires to the driver side of the dash and the gray wires to the passenger side of the dash

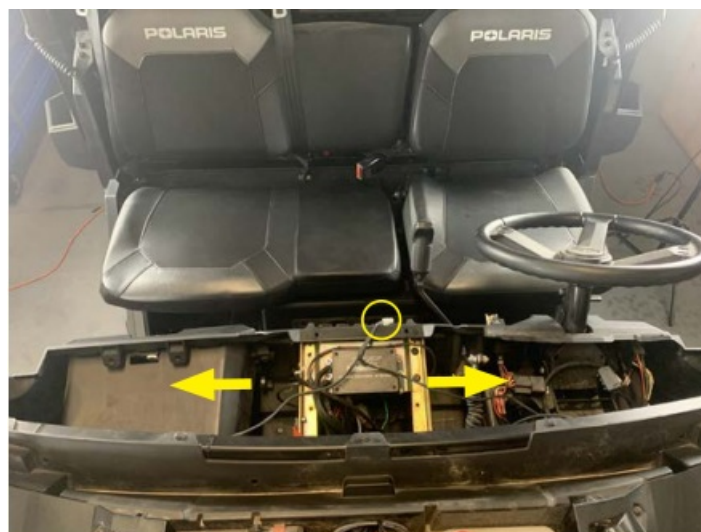

- Reaching from the top of the driver's side of the dash, pass the white wires through the top of the pocket and insert the grommet



- Reaching from the top of the passenger side of the dash, pass the gray wires through the top of the pocket and insert the grommet



- On the radio harness pass the power connection through the grommet toward the front of the vehicle and plug into an open port on the pulse junction block



- Drill a 1" hole on the top of the glove box to install the USB/AUX Port (PSAP-18)



Assembly & Dash Radio Install

- Place top of dash in vehicle



- Install three push pins on driver side of dash



- Connect harness and place the instrument panel in location and then insert two push pins



- Install three push pins on passenger side dash



- Install upper glove box with four T20 Torx screws



- Install six push pins on the front side of the dash



- Connect the radio harness and USB/AUX (PSAP-18) harness to the radio



- Install the radio assembly and attach with two push pins



- Turn vehicle and radio on and enjoy the music



FCC Notice

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

WARRANTY

Maxxsonics USA Inc. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics USA Inc. will, at its discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics USA Inc. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation and freight are not the responsibility of Maxxsonics USA Inc. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.


The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by MB Quart is under license. All product names, logos, and brands are the property of their respective owners. All company, product, and service names used in this literature are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.

©2021 Maxxsonics USA, Inc.

MBQuart products are designed and engineered in the USA by

www.maxxsonics.com

Documents / Resources

	<p>MB QUART MBQRTG-STG2-RC-1 Polaris Ranger Tuned Audio System [pdf] Instruction Manual</p> <p>MBQRTG-STG2-RAD-1, MBQRTG-STG2-RC-1, Polaris Ranger Tuned Audio System, MBQRTG-STG2-RC-1 Polaris Ranger Tuned Audio System, Ranger Tuned Audio System, Tuned Audio System, Audio System</p>
---	--

References

- [Maxxsonics | Powered by Maxxsonics. | Audio Stores Online](#)