



McIntosh WS350 In Wall Loudspeaker System Installation Guide

[Home](#) » [McIntosh](#) » McIntosh WS350 In Wall Loudspeaker System Installation Guide 



Installation Guide WS350 In-Wall Loudspeaker System



Contents

[1 Installing the Loudspeaker](#)

[2 Installing the Loudspeaker](#)

[3 Technical Assistance](#)

[4 Documents / Resources](#)

[4.1 References](#)

Installing the Loudspeaker

The WS350 In-Wall Loudspeaker System require at least 3-3/4 inch of wall depth, including the wallboard. It can be mounted into a wall surface with a thickness between 3/8 inch and 1 inch.

Tools and Fasteners Required:

Phillips Screwdriver	Tape Measure
Drywall Saw or Knife	Stud Finder
Pencil	Bubble Level
Cable Ties	

Parts Included:

- Loudspeaker Baffle (1)
- Frame (1)
- Grille (1)
- Cutout Template (1)
- Clamping Pieces (2)
- Airtight Electrical Connector (1)
- Frame Screws #10-24 x 3 inch (6)
- Baffle Screws #10-24x 1-1/2 inch (6)
- Baffle Box (1)
- Frame Gaskets (2)
- Grille Fasteners (10)
- Painting Mask (1)
- Baffle Washers #8 (6)

Optional Part:

RK320 Rough-In Bracket (designed to provide a cutout and mounting frame for installation during new construction).

Use of Paint Mask

Set the Paint Mask between the baffle and grille to paint the grille and frame without getting paint on the baffle and Loudspeaker Elements.

Installing the Frame

The Frame Assembly consists of the frame and two clamping pieces, held together with six 3 inch screws.

These screws are fully extended to allow pushing the clamping pieces toward each other so the whole assembly fits into the cutout.

Note: If the optional RK320 Rough-In Bracket has already been installed, go directly to step 3.

1. Hold the supplied cutout template against the wall and align it using the bubble level. Tape the aligned template to the wall and trace the opening on the wall.
2. Cut out and remove the piece of wallboard. Pull enough Loudspeaker Cable to be able to connect it to the Loudspeaker Baffle while the baffle is still out of the wall.
3. Install the two “L” Shaped self adhesive Frame Gaskets to the rear of the frame so that it will be between the frame and the wall. Insert the right side of the assembly into the hole and push it to the right.
This will give enough room to insert the left side of the assembly into the wall. Center the assembly in the opening.
4. Push the right side Clamping Piece up against the backside of the wallboard. Tighten the now protruding center screw enough to gently hold the frame in place.
Repeat on the other side of the frame.
5. Use the bubble level to assure the frame is correctly positioned, and then tighten all the screws until the frame is securely attached to the wallboard.

Note: To avoid crushing the wallboard, do not over tighten the screws. If the mounting position places the frame near a stud, remove the clamping piece and secure the frame directly to the stud, through the provided holes.

Installing the Baffle Box

Before setting the Baffle Box into the frame, run the Loudspeaker Wire through the supplied Airtight Electrical Connector and tighten the connector onto the Loudspeaker Cable. Be sure to pull enough wire through the connector to allow connection to the crossover network on the back of the Loudspeaker Baffle while it is still out of the wall.

Set the Baffle Box into the frame.

Note: The Baffle Box may be positioned with the Airtight Electrical Connector either at the top or bottom.

Connecting the Loudspeaker

The McIntosh WS350 In-Wall Loudspeaker System utilize Binding Posts for Loudspeaker Cable Connections.

1. Connect a Loudspeaker Cable from the black or negative Loudspeaker Binding Post on the back of the Loudspeaker Baffle to the negative or common output terminal of one channel of the amplifier.
2. Connect a Loudspeaker Cable from the red or positive Loudspeaker Binding Post on the back of the Loudspeaker Baffle to the positive or 4 ohm output terminal of the same channel of the amplifier.

Note: Be sure to tighten the Loudspeaker and Amplifier Binding Posts after connecting.

Installing the Loudspeaker Baffle


Place the Loudspeaker Baffle into the frame/box assembly and screw it into place using the six supplied screws. Hold the baffle in place until at least two screws are properly secured.

Note: Secure excess Loudspeaker Cable away from woofer cone with cable ties.

Installing the Grille

Line up the outside of the Loudspeaker Grille with the Loudspeaker Baffle. The Grille is then secured to the Baffle with magnetic fasteners.

Installing the Loudspeaker

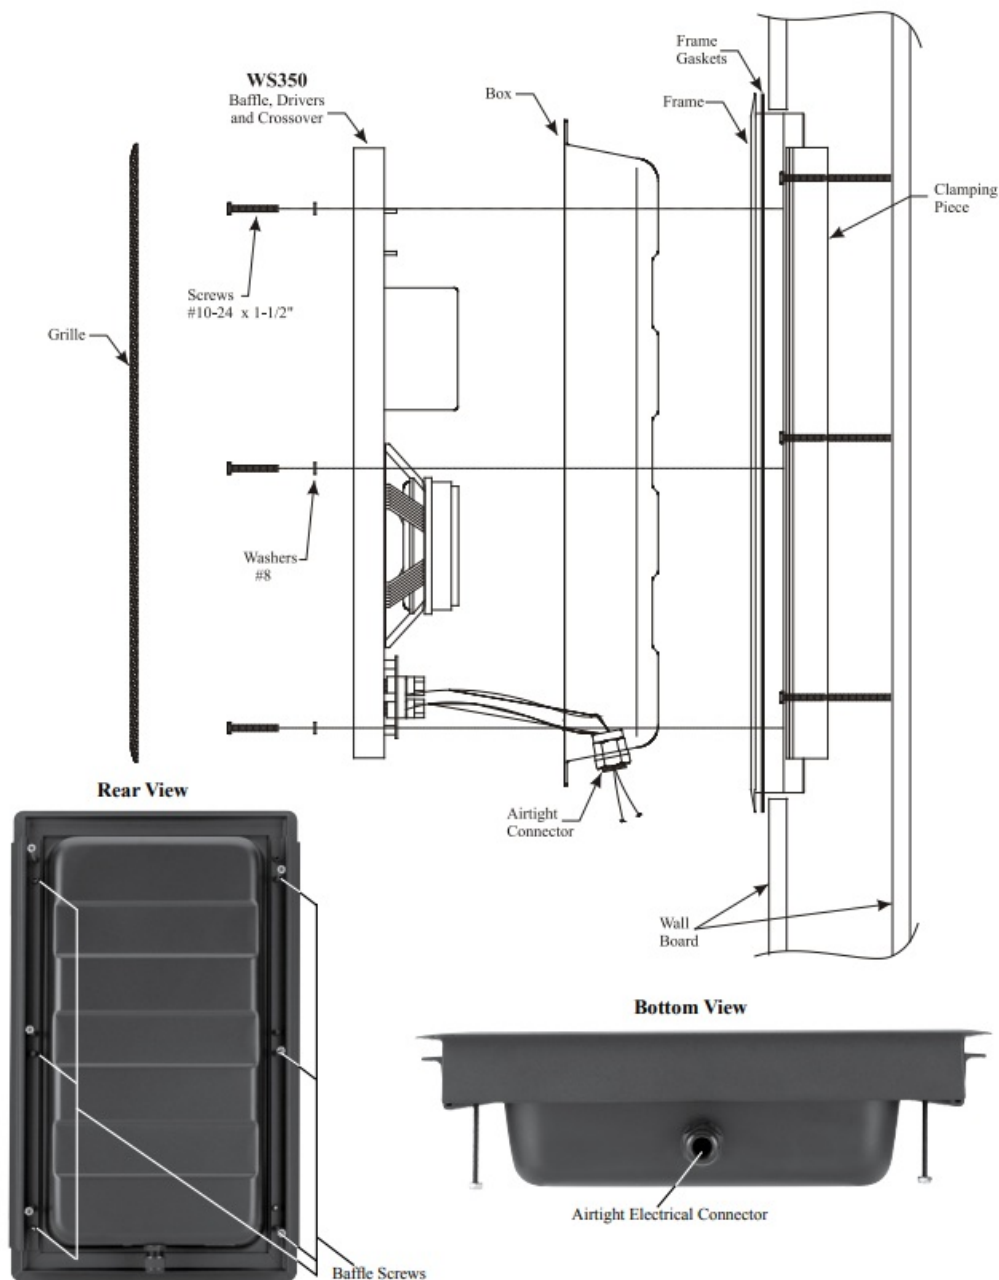

Thank You

Your decision to own this McIntosh WS350 Inwall Loudspeaker System ranks you at the very top among discriminating music listeners.

You now have "The Best."

The McIntosh dedication to "Quality," is assurance that you will receive many years of musical enjoyment from this unit.

Please Take A Moment

The serial number, purchase date and McIntosh dealer name are important to you for possible insurance claim or future service.

The spaces below have been provided for you to record that information:

Serial Number:

Purchase Date:

Dealer Name:

Technical Assistance

If at any time you have questions about your McIntosh product, contact your McIntosh dealer who is familiar with your McIntosh equipment and any other brands that may be part of your system. If you or your dealer wish additional help concerning a suspected problem, you can receive technical assistance for all McIntosh products at:

McIntosh Laboratory, Inc.
2 Chambers Street
Binghamton, New York 13903
Phone: 607-723-1545
Fax: 607-723-3636

Customer Service

If it is determined that your McIntosh product is in need of repair, you can return it to your Dealer. You can also return it to the McIntosh Laboratory Service Department. For assistance on factory repair return procedure, contact the McIntosh Service Department at:

McIntosh Laboratory, Inc.
2 Chambers Street
Binghamton, New York 13903
Phone: 607-723-3515
Fax: 607-723-1917

WS350 Performance Specifications

Driver Complement

8 inch Woofer
4 inch Midrange
Five 1 inch Dome Tweeters

Impedance

4 ohm Nominal
Frequency Response
60Hz – 20kHz + 2dB (Anechoic Response)

Sensitivity

85dB (2.8V/1m)

Crossover Frequencies

300Hz and 1.5kHz
Power Handling
200 Watts Maximum

Dimensions

23.5 inches (59.7cm) Height, 14 inches (35.5cm) Width, 3.65 inches (9.3cm) Depth

Finish

White Primer Coat

Weight (each)

25 pounds (11.3kg) net, 32 pounds (14.5kg) in shipping carton




McIntosh Laboratory, Inc.
2 Chambers Street
Binghamton, NY 13903
www.mcintoshlabs.com

The continuous improvement of its products is the policy of McIntosh Laboratory Incorporated who reserve the right to improve design without notice.

Printed in the U.S.A.

McIntosh Part No. 04179100

Documents / Resources

	<p>McIntosh WS350 In Wall Loudspeaker System [pdf] Installation Guide WS350 In Wall Loudspeaker System, WS350, In Wall Loudspeaker System, Loudspeaker System, System</p>
---	---

References

-  [Manual-Hub.com - Free PDF manuals!](#)
-  [McIntosh: Home Audio Systems for Music & Home Theater](#)
-  [Manual-Hub.com - Free PDF manuals!](#)
- [User Manual](#)

Manuals+. [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.