



MEAN WELL HRP-150N 150W Single Output with PFC Function Instruction Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL HRP-150N 150W Single Output with PFC Function Instruction Manual 



150W Single Output with PFC Function
Instruction Manual



AS/NZS 62368.1



UL62368-1



BS EN/EN62368-1



TPTC004



IEC62368-1



CB



CE



UKCA

Contents

- 1 Features
- 2 Applications
- 3 SPECIFICATION
- 4 Block Diagram
- 5 Function Manual
- 6 Mechanical Specification
- 7 Documents / Resources
 - 7.1 References
- 8 Related Posts

Features

- Universal AC input / Full range
- Built-in active PFC function, PF>0.95
- 250% peak power capability
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- 1U low profile 38mm
- Built-in remote sense function
- 5 years warranty



Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Diagnostic or biological facilities
- Test or measurement systems
- Telecommunication equipment

■ GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

■ Description

HRP-150N is a 150W single output type AC/DC power supply. This series operates for 85-264VAC input voltage and offers the models with the DC output mostly demanded from the industry. Each model is cooled by free air convection, working for the temperature up to 70°C without cover. Moreover, HRP-150N provides 250% short-duration peak power for motor applications and electromechanical loads requiring much higher power during start-

up.

■ Model Encoding

HRP	Output voltage(12/24/36/48V)
150N	Rated wattage
24	Series name

SPECIFICATION

MODEL		HRP-150N- 2	HRP-150N-24	HRP-150N-36	HRP-150N-48
OUT PUT	DC VOLTAGE	12V	24V	36V	48V
	RATED CUR RENT	13A	6.5A	4.3A	3.3A
	CURRENT R ANGE	0 ~ 13A	0 ~ 6.5A	0 ~ 4.3A	0 ~ 3.3A
	RATED POW ER	156W	156W	154.8W	158.4W
	RIPPLE & NO ISE (max.) N ote.2	120mVp-p	150mVp-p	200mVp-p	240mVp-p
	VOLTAGE AD J. RANGE	10.2 ~ 13.8V	21.6 ~ 28.8V	28.8 ~ 39.6V	40.8 ~ 55.2V
	VOLTAGE TO LERANCE N ote.3	±1.5%	±1.5%	±1.5%	±1.5%
	LINE REGUL ATION	±0.3%	±0.2%	±0.2%	±0.2%
	LOAD REGU LATION	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	3000ms, 50ms/230VAC 3000ms, 50ms/115VAC at full load			
	HOLD UP TI ME (Typ.)	16ms/230VAC 16ms/115VAC at full load			
	VOLTAGE RA NGE ote.4	85 ~ 264VAC 120 ~ 370VDC			

INPUT	FREQUENCY RANGE	47 ~ 63Hz			
	POWER FACTOR (Typ.)	PF>0.95/230VAC PF>0.98/115VAC at full load			
	EFFICIENCY (Typ.)	88%	88%	89%	89%
	AC CURRENT (Typ.)	1.7A/115VAC 0.9A/230VAC			
	INRUSH CURRENT (Typ.)	35A/115VAC 70A/230VAC			
	LEAKAGE CURRENT	<1mA / 240VAC			
PROTECTION	OVERLOAD	Normally works within 105 ~ 200% rated output power for more than 5 seconds and then shut down o/p voltage, re-power on to recover			
		Constant current limiting for output power >280% rated for more than 5 seconds and then shut down o/p voltage, re-power on to recover			
	OVERVOLTAGE	14.4 ~ 16.8V	30 ~ 34.8V	41.4 ~ 48.6V	57.6 ~ 67.2V
		Protection type : Shut down o/p voltage, re-power on to recover			
ENVIRONMENT	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down			
	WORKING TEMP.	-40 ~ +70°C (Refer to “Derating Curve”)			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-50 ~ +85°C, 10 ~ 95% RH			
	TEMP. COEFFICIENT	±0.04%/°C (0 ~ 50°C)			
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes			
	OPERATING ALTITUDE Note.6	5000 meters			

SAFETY & EMC (Note 5)	SAFETY STANDARDS	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, AS/NZS 62368.1 approved		
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC		
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032	Class B
		Radiated	BS EN/EN55032	Class B
		Harmonic current	BS EN/EN61000-3-2	Class A
		Voltage Flicker	BS EN/EN61000-3-3	—
	EMC IMMUNITY	BS EN/EN55035 , BS EN/EN61000-6-2(BS EN/EN50082-2)		
		Parameter	Standard	Test Level / Note
		ED	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact
		RF field	BS EN/EN61000-4-3	Level 3, 10V/m
		EFT/ Burst	BS EN/EN61000-4-4	Level 3, 2KV
		Surge	BS EN/EN61000-4-5	Level 4, 4KV/Line-FG; 2KV/Line-Line
		Conducted	BS EN/EN61000-4-6	Level 3, 10V
		Magnetic Field	BS EN/EN61000-4-8	Level 4, 30A/m
		Voltage Dips and Interruptions	BS EN/EN61000-4-11	95% dip 0.5 periods, 30% dip 25 periods, 95% interruptions 250 periods
OTHERS	MTBF	1740.3K hrs min. Telcordia SR-332 (Bellcore) ; 221.7K hrs min. MIL-HDBK-217F (25°C)		
	DIMENSION	159*97*38mm (L*W*H)		
	PACKING	0.54Kg; 24pcs/12.96Kg/0.9CUFT		


NOTE

1. All parameters NOT specially mentioned are measured at 230VAC input rated load, and 25°C of ambient
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 1uf & 47uf parallel capacitor.
3. Tolerance: includes set up tolerance, line regulation, and load
4. Derating may be needed under low input Please check the derating curve for more details.
5. The power supply is considered a component that will be installed into a final All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to EMI testing of component power supplies. (as available on <http://www.meanwell.com>)
6. The ambient temperature derating of 5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitudes higher than 2000m(6500ft).


※ Product Liability Disclaimer For detailed information, please refer to <https://www.meanwell.com/serviceDisclaimer.aspx>

Block Diagram


PWM fosc: 90KHz

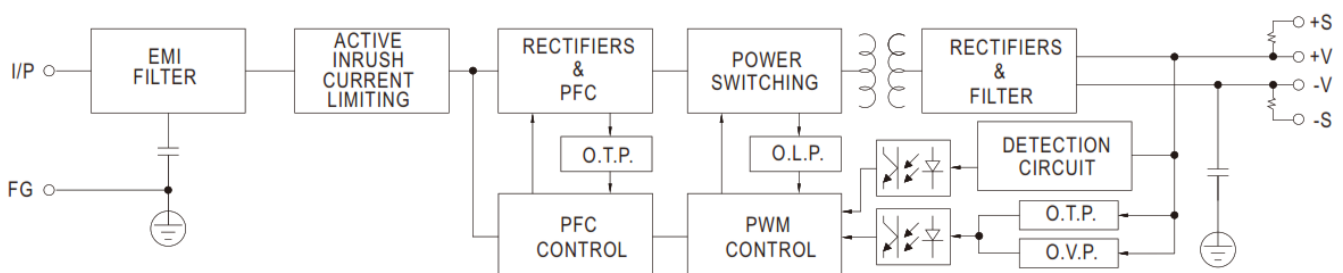

Derating Curve

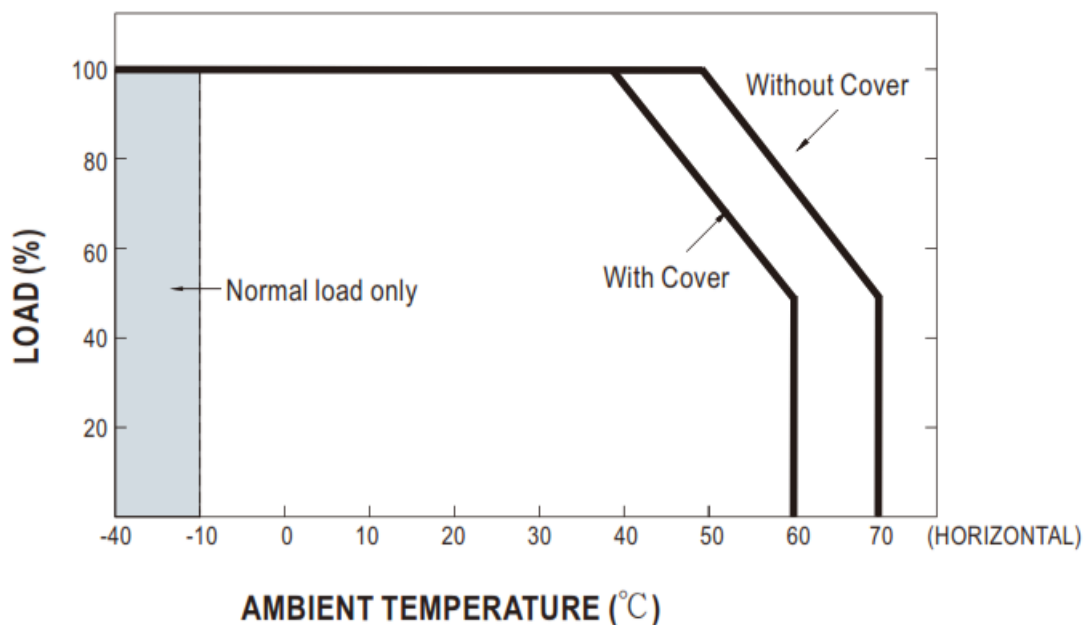


Output Derating VS Input Voltage

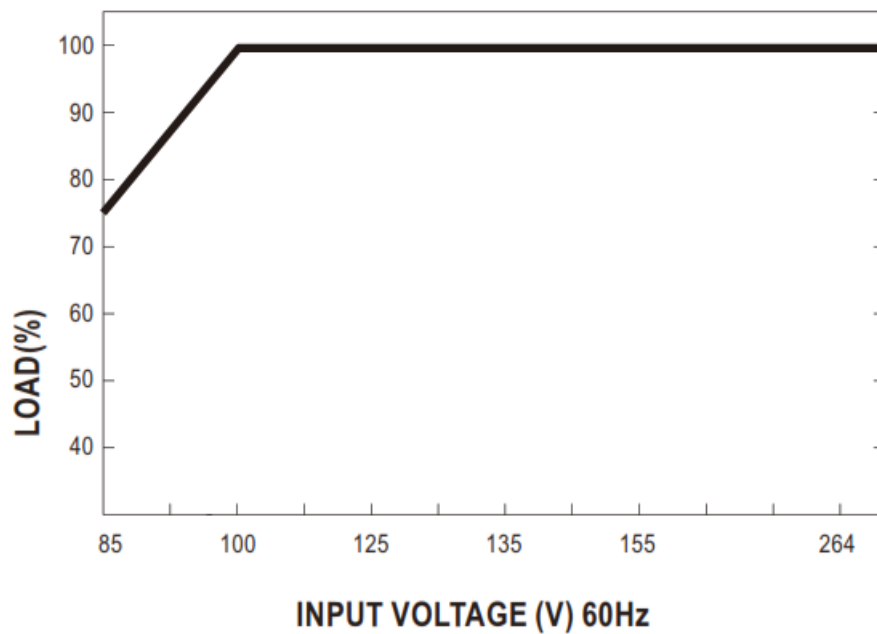

Function Manual

1. Remote Sense

The remote sensing compensates for voltage drop on the load wiring up to 0.5V.

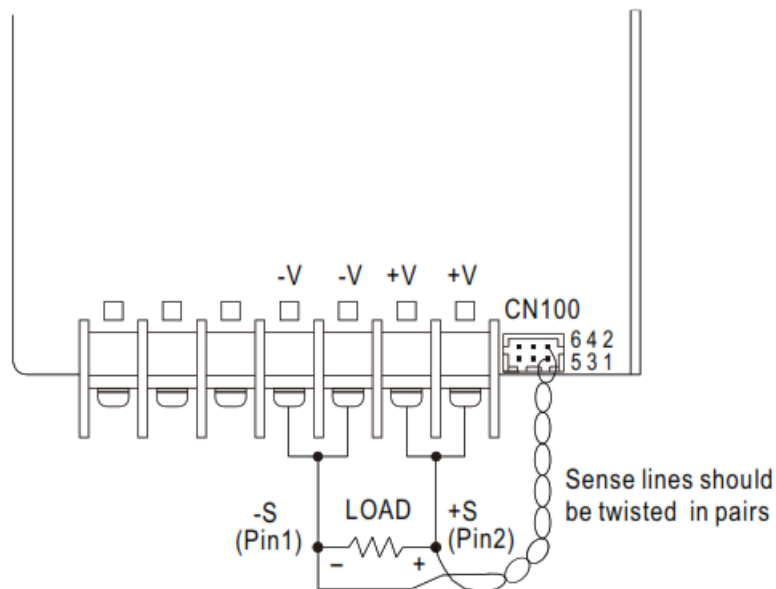


CN100			
6	NC	NC	+S 2
5	NC	NC	-S 1

2. Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty } \frac{t}{T} \times 100\% \leq 35\%$$

$$t \leq 5 \text{ sec}$$

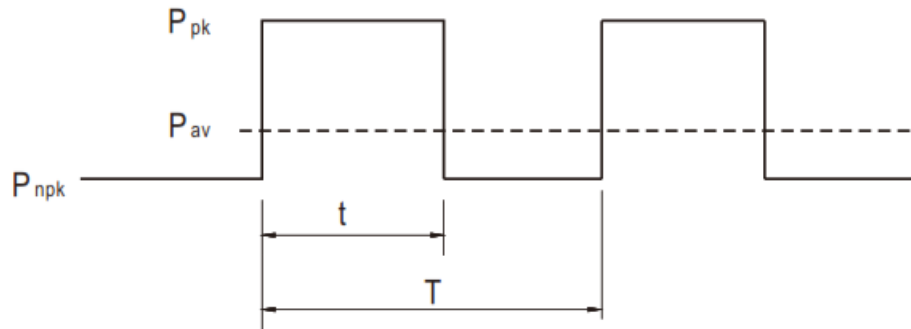

P_{av} : Average output power (W)


P_{pk} : Peak output power (W)

P_{npk} : Non-peak output power(W)

P_{rated} : Rated output power(W)

t : Peak power width(sec)

T : Period(sec)

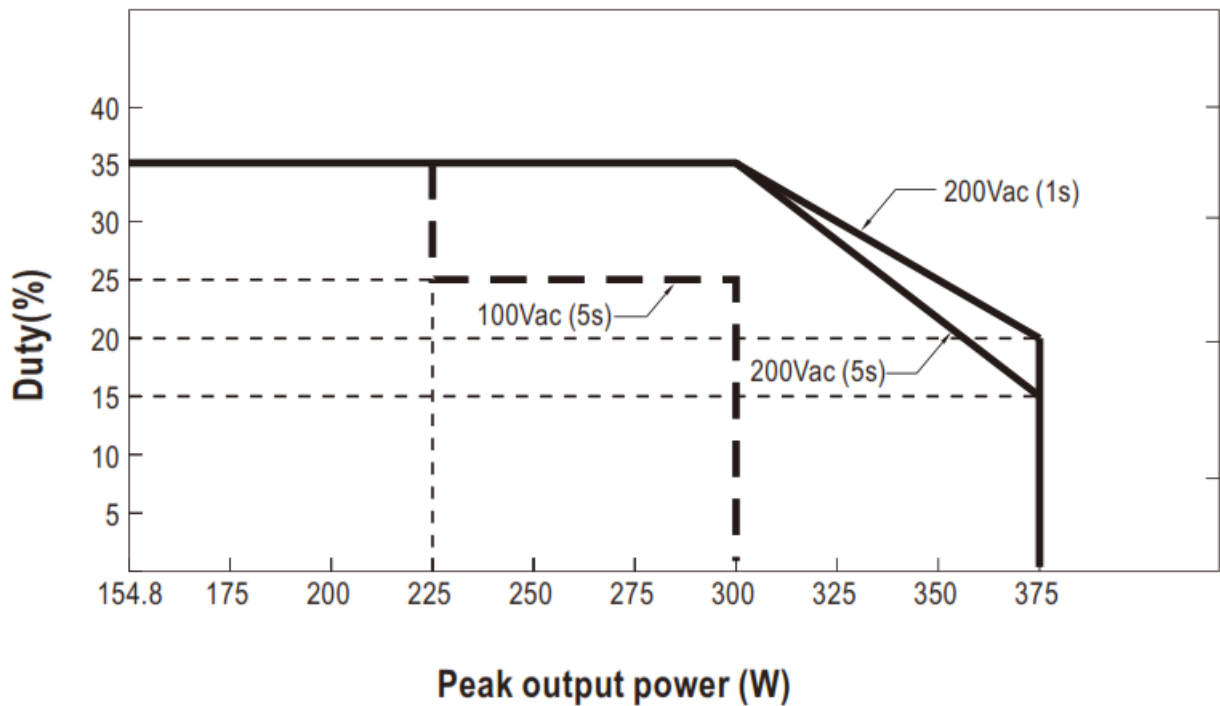

For example (12V model) :

$V_{in} = 100V$ Duty_max = 25%

$P_{av} = P_{rated} = 156W$

$P_{pk} = 300W$


$t \leq 5 \text{ sec}$

$T \geq 20 \text{ sec}$

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} = \frac{300 \times 5 + P_{npk} \times (20-5)}{20} \leq 156W$$

P npk≤ 108W

Mechanical Specification

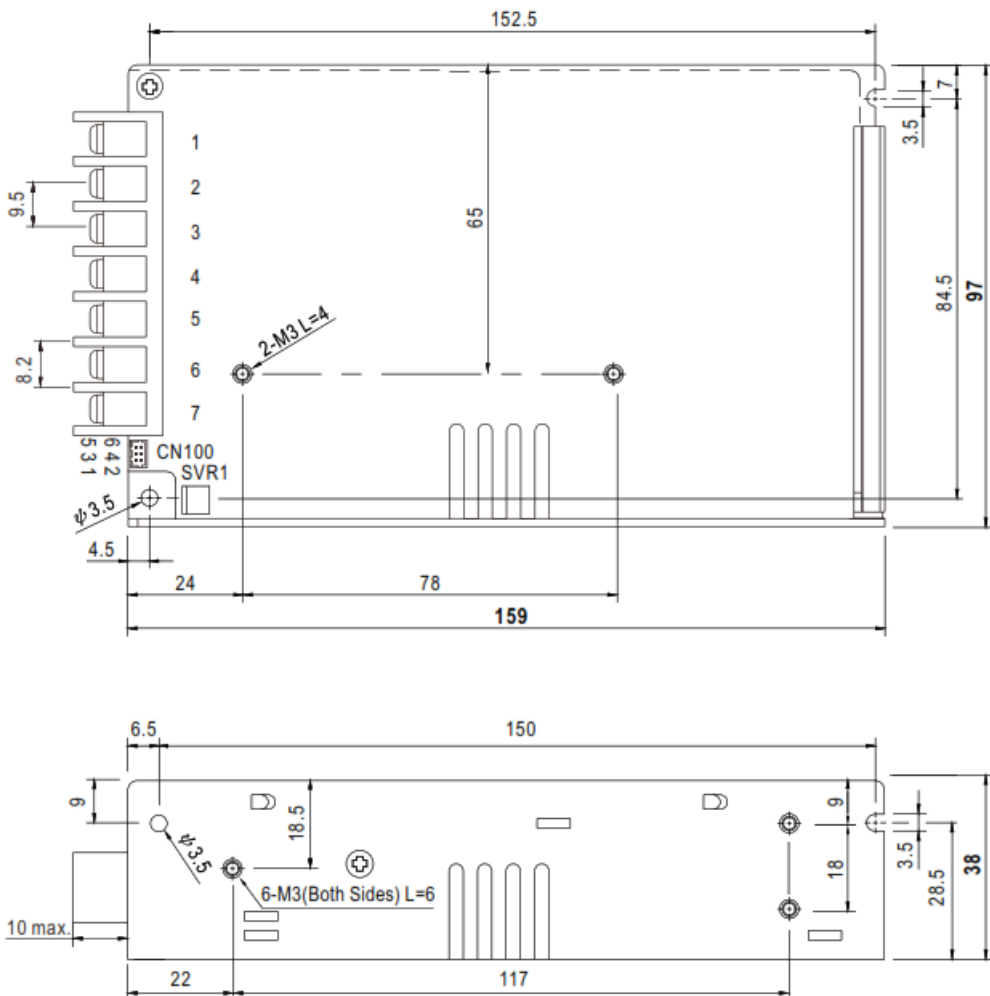

Terminal Pin No. Assignment :


Pin No.	Assignment	Pin No.	Assignment
1	AC/L	4,5	DC OUTPUT -V
2	AC/N	6,7	DC OUTPUT +V
3	FG		

Connector Pin No. Assignment (CN100) :
HRS DF11-6DP-2DSA or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	-S	HRS DF11-6DSor equivalent	HRS DF11-**SC or equivalent
2	+S		
3-6	NC		

Please refer to : <http://www.meanwell.com/manual.html>

Documents / Resources

	<p>MEAN WELL HRP-150N 150W Single Output with PFC Function [pdf] Instruction Manual HRP-150N, 150W Single Output with PFC Function, HRP-150N 150W Single Output with PFC Function, Single Output with PFC Function, Output with PFC Function, PFC Function</p>
---	---

References

- [TÜV Rheinland - Home | US | TÜV Rheinland](#)
- [MEAN WELL Switching Power Supply Manufacturer](#)
- [Installation Manual-MEAN WELL Switching Power Supply Manufacturer](#)
- [Product Liability Disclaimer-MEAN WELL Switching Power Supply Manufacturer](#)

Manuals+.