



MEAN WELL LPF-40 Series 40W Constant Voltage Constant Current LED Driver Instruction Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL LPF-40 Series 40W Constant Voltage Constant Current LED Driver Instruction Manual 

Contents

- [1 MEAN WELL LPF-40 Series 40W Constant Voltage Constant Current LED Driver](#)
- [2 Features](#)
- [3 Applications](#)
- [4 GTIN CODE](#)
- [5 Description](#)
- [6 Model Encoding](#)
- [7 Specifications](#)
- [8 Block Diagram](#)
- [9 OUTPUT LOAD vs TEMPERATURE](#)
- [10 STATIC CHARACTERISTIC](#)
- [11 LIFE TIME](#)
- [12 MECHANICAL SPECIFICATION](#)
- [13 INSTALLATION MANUAL](#)
- [14 Documents / Resources](#)
- [15 Related Posts](#)



MEAN WELL LPF-40 Series 40W Constant Voltage Constant Current LED Driver



Features

- Constant Voltage + Constant Current mode output
- Plastic housing with Class II design
- Built-in active PFC function
- Class 2 power unit
- Fully encapsulated with IP67 level
- Typical lifetime>50000 hours
- 5 years warranty

Applications

LED panel lighting
LED downlight
LED decorative lighting
LED tunnel lighting
Moving sign

GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description

LPF-40 series is a 40W AC/DC LED driver featuring the dual modes constant voltage and constant current output. LPF-40 operates from 90-305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40°C~+80°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations.

LPF - 40 - 24




MODEL		LPF-4 0-12	LPF-4 0-15	LPF-4 0-20	LPF-4 0-24	LPF-4 0-30	LPF-4 0-36	LPF-4 0-42	LPF-4 0-48	LPF-4 0-54
OUTPUT	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.2	7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	RATED CURRENT	3.34A	2.67A	2A	1.67A	1.34A	1.12A	0.96A	0.84A	0.76A
	RATED POWER Note.5	40.08W	40.08W	40W	40.08W	40.2W	40.32W	40.32W	40.32W	41.04W
	RIPPLE & NOISE (max.) Note.3	150mV p-p	150mV p-p	150mV p-p	150mV p-p	200mV p-p	250mV p-p	250mV p-p	250mV p-p	350mV p-p
	VOLTAGE TOLERANCE Note.4	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME Note.6	1000ms, 80ms / 115VAC 500ms, 80ms / 230VAC								
	HOLD UP TIME (Typ.)	16ms/230VAC 16ms/115VAC								
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to “STATIC CHARACTERISTIC” section)								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR	PF≥0.97/115VAC, PF≥0.95/230VAC, PF≥0.92/277VAC@full load (Please refer to “POWER FACTOR (PF) CHARACTERISTIC” section)								

INPUT	TOTAL HARMONIC DISTORTION	THD< 20%(@load≥60%/115VC,230VAC; @load≥75%/277VAC) (Please refer to “TOTAL HARMONIC DISTORTION(THD)” section)								
	EFFICIENCY (Typ.)	84%	85%	86%	87%	88%	88%	88.5%	90%	90%
	AC CURRENT	0.6A / 115VAC			0.3A / 230VAC			0.25A/277VAC		
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=210μs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	12 units (circuit breaker of type B) / 20 units (circuit breaker of type C) at 230VAC								
	LEAKAGE CURRENT	<0.75mA / 240VAC								
PROTECTION	OVER CURRENT	95 ~ 108%								
		Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed								
	OVER VOLTAGE	15 ~ 17V	17.5 ~ 21V	23 ~ 27V	28 ~ 35V	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	59 ~ 66V
		Shut down and latch off o/p voltage, re-power on to recover								
OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover									
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +80°C (Please refer to “ OUTPUT LOAD vs TEMPERATURE” section)								
	MAX. CASE TEMP.	Tcase=+80°C								
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)								
SAFETY & EMC	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								
	SAFETY STANDARDS Note.8	UL8750, CSA C22.2 No. 250.0-08, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent, BS EN/EN62384,EAC TP TC 004, IP67, J61347-1, J61347-2-13 ,GB19510.1,GB19510.14 approved ; design refer to UL60950-1								
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH								
SAFE	EMC EMISSION Note.8	Compliance to BS EN/EN55015,BS EN/EN61000-3-2 Class C (@load≥60%) ; BS EN/EN61000-3-3, GB17743 and GB17625.1,EAC TP TC 020								


	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level (surge immunity Line-Line 2KV), EAC TP TC 020
OTHERS	MTBF	3597.9K hrs min. Telcordia SR-332 (Bellcore) ; 438.9Khrs min. MIL-HDBK-217F (25°C)
	DIMENSION	162.5*43*32mm (L*W*H)
	PACKING	0.44Kg; 32pcs/15.08Kg/0.93CUFT
Note:	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25 C of ambient temperature.</p> <p>2. Please refer to "DRIVING METHODS OF LED MODULE".</p> <p>3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>4. Tolerance: includes set up tolerance, line regulation and load regulation.</p> <p>5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.</p> <p>6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.</p> <p>7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p> <p>8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently connected to the mains.</p> <p>9. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly at point (or TMP, per DLC), is about 75C or less.</p> <p>10. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com</p> <p>11. The ambient temperature derating of 3.5 C/1000m with fanless models and of 5 C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>12. For any application note and IP water proof function installation caution, please refer our user manual before using.</p> <p>https://www.meanwell.com/Upload/PDF/LED_EN.pdf</p> <p>Product Liability Disclaimer: For detailed information please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>	

Block Diagram

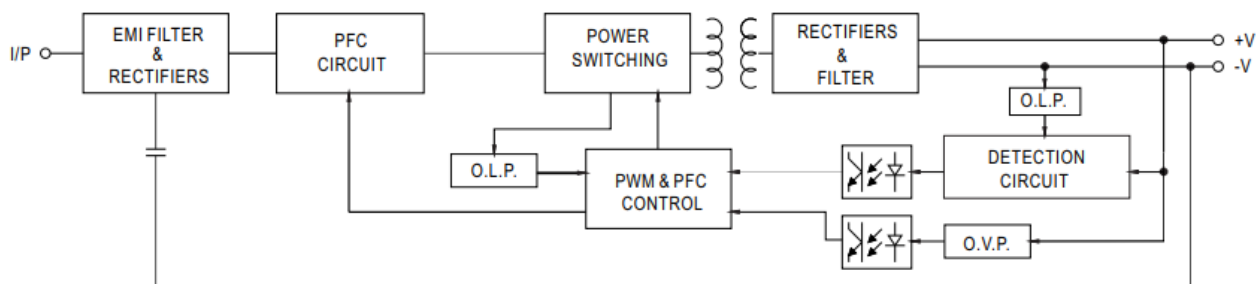

DRIVING METHODS OF LED MODULE


This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

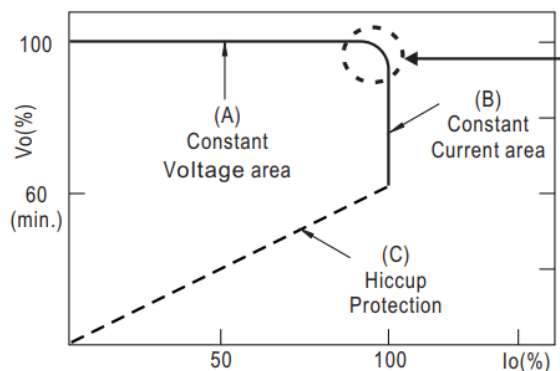


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.
Should there be any compatibility issues, please contact MEAN WELL.

Typical output current normalized by rated current (%)

OUTPUT LOAD vs TEMPERATURE

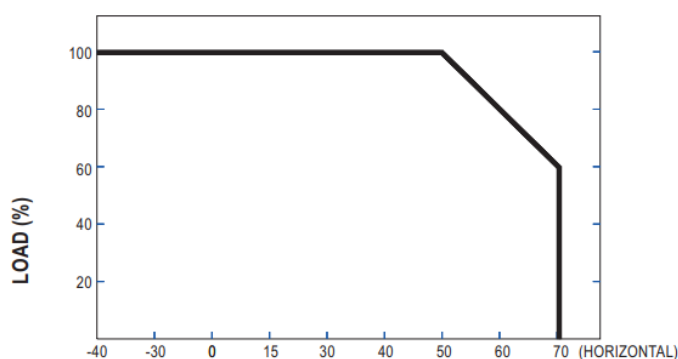


AMBIENT TEMPERATURE, T_a (°C)

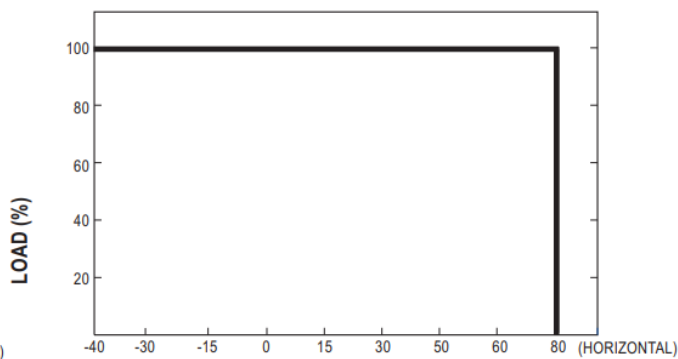

T_{case} (°C)

STATIC CHARACTERISTIC


POWER FACTOR (PF) CHARACTERISTIC

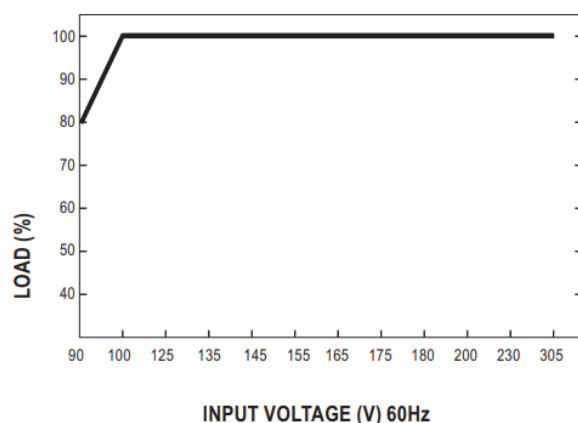

※ De-rating is needed under low input voltage.

※ T_{case} at 70°C

Constant Current Mode

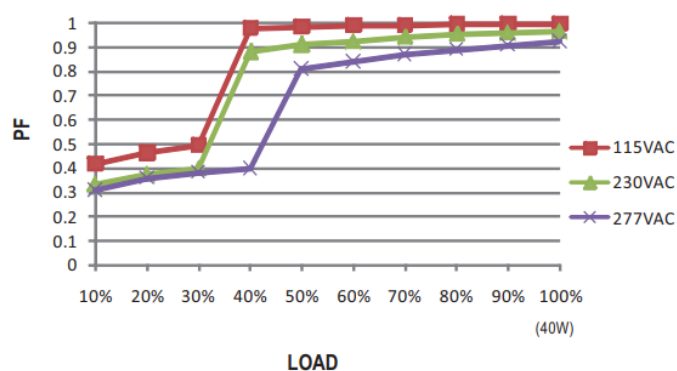

※ De-rating is needed under low input voltage



TOTAL HARMONIC DISTORTION (THD)

48V Model, T_{case} at 70°C


EFFICIENCY vs LOAD

LPF-40 series possess superior working efficiency that up to 90% can be reached in field applications


※ 48V Model, Tcase at 70°C

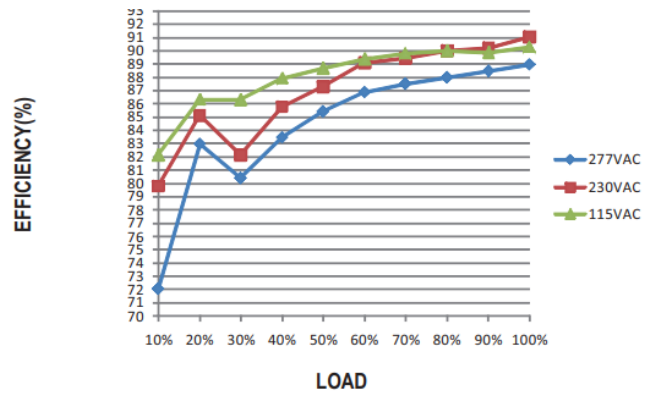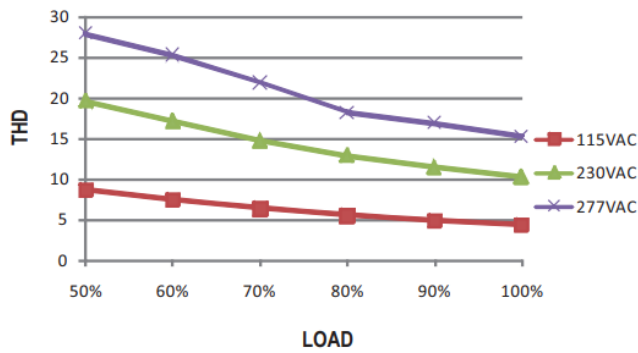


LIFE TIME

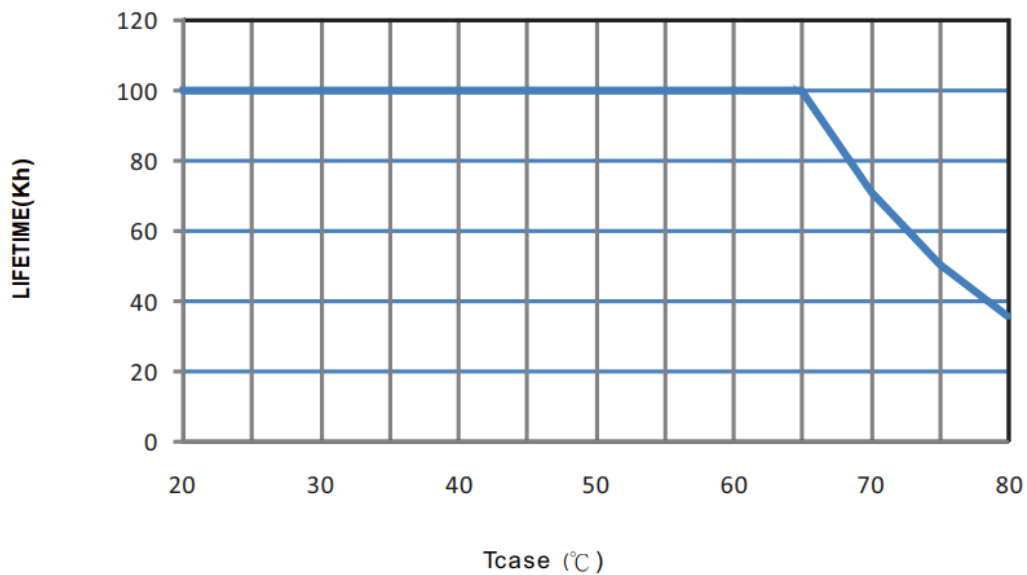

MECHANICAL SPECIFICATION

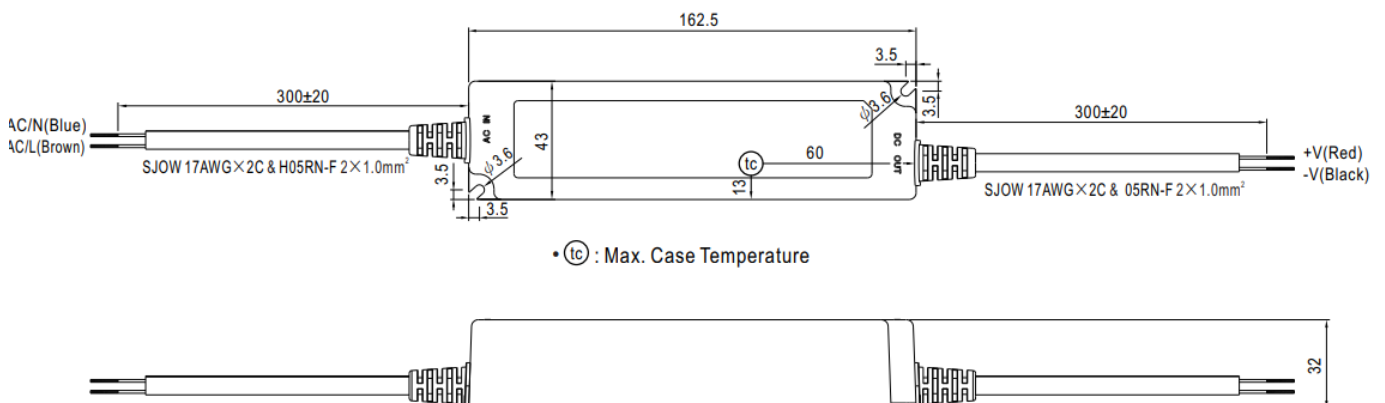


Recommend Mounting Direction

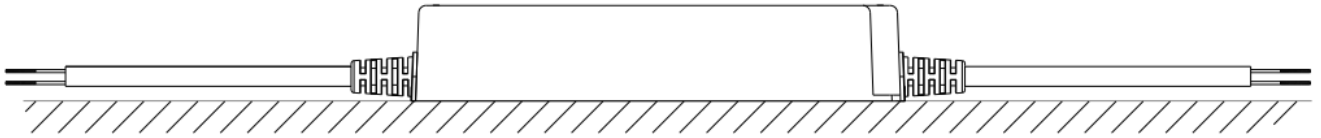

INSTALLATION MANUAL

Please refer to: <http://www.meanwell.com/manual.html>

Documents / Resources

	<p>MEAN WELL LPF-40 Series 40W Constant Voltage Constant Current LED Driver [pdf] Instr uction Manual</p> <p>LPF-40 Series 40W Constant Voltage Constant Current LED Driver, LPF-40 Series, 40W Const ant Voltage Constant Current LED Driver</p>
---	---