



# MEAN WELL LRS-100 Series 100W Single Output Switching Power Supply Owner's Manual

[Home](#) » [MEAN WELL](#) » **MEAN WELL LRS-100 Series 100W Single Output Switching Power Supply Owner's Manual** 

## Contents

### [1 MEAN WELL LRS-100 Series 100W Single Output Switching Power Supply Owner's Manual](#)

- [1.1 Features](#)
- [1.2 Applications](#)
- [1.3 GTIN CODE](#)
- [1.4 Description](#)
- [1.5 Model Encoding](#)
- [1.6 Specification](#)
- [1.7 Block Diagram](#)
- [1.8 Derating Curve](#)
- [1.9 Static Characteristics](#)
- [1.10 Mechanical Specification](#)
- [1.11 Installation Manual](#)
- [2 Documents / Resources](#)
  - [2.1 References](#)
- [3 Related Posts](#)

## MEAN WELL LRS-100 Series 100W Single Output Switching Power Supply Owner's Manual



100W Single Output Switching Power Supply

**LRS-100** series



## Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 second
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Miniature size and 1U low profile
- Compliance to IC/BS EN/EN 60335-1(PD3) and IC/BS EN/EN61558-1. 2-16 for household appliances
- Operating altitude up to 5000 meters (Note.7)
- Withstand 5G vibration test
- LED indicator for power on
- No load power consumption<0.3W
- Over voltage category III
- 100% full load burn-in test
- High operating temperature up to 70°C
- High efficiency, long life and high reliability
- 3 years warranty

## Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Electronic instruments, equipments or apparatus
- Household appliances

## GTIN CODE


MW Search: <https://www.meamwell.com/serviceGTIN.aspx>

## Description

LRS-100 series is a 100W single-output enclosed type power supply with 30mm of low profile design. Adopting the full range 85~264VAC input, the entire series provides an output voltage line of 3.3V, 5V, 12V, 15V, 24V, 36V and 48V.

In addition to the high efficiency up to 91%, the design of metallic mesh case enhances the heat dissipation of LRS-100 that the whole series operates from -30°C through 70°C under air convection without a fan. Delivering an extremely low no load power consumption (less than 0.3W), it allows the end system to easily meet the worldwide energy requirement. LRS-100 has the complete protection functions and 5G anti vibration capability; it is complied with the international safety regulations such as TUV BS EN/EN2368-1, BS EN/EN60335-1, BS EN/EN61558-1/-2-16, UL62368-1 and GB 4943.1. LRS-100 series serves as a high price-to-performance power supply solution for various industrial applications.


## Model Encoding

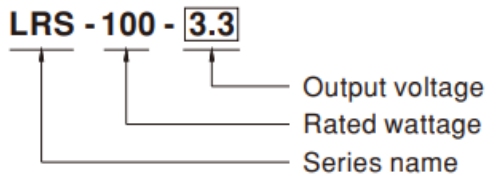


## Specification

| MODEL                 |  | LRS-100-3.3   | LRS-100-5    | LRS-100-12   | LRS-100-15     | LRS-100-24   | LRS-100-36   | LRS-100-48   |
|-----------------------|--|---|--------------|--------------|----------------|--------------|--------------|--------------|
| OUTPUT                | DC VOLTAGE   | 3.3V  | 5V           | 12V          | 15V            | 24V          | 36V          | 48V          |
|                       | RATED CURRENT  | 20A   | 18A          | 8.5A         | 7A             | 4.5A         | 2.8A         | 2.3A         |
|                       | CURRENT RANGE  | 0 ~ 20A   | 0 ~ 18A      | 0 ~ 8.5A     | 0 ~ 7A         | 0 ~ 4.5A     | 0 ~ 2.8A     | 0 ~ 2.3A     |
|                       | RATED POWER  | 66W   | 90W          | 102W         | 105W           | 108W         | 100.8W       | 110.4W       |
|                       | RIPPLE & NOISE (max.) Note.2   | 100mVp-p  | 100mVp-p     | 120mVp-p     | 120mVp-p       | 150mVp-p     | 200mVp-p     | 200mVp-p     |
|                       | VOLTAGE ADJ. RANGE   | 2.97 ~ 3.6V   | 4.5 ~ 5.5V   | 10.2 ~ 13.8V | 13.5 ~ 18V     | 21.6 ~ 28.8V | 32.4 ~ 39.6V | 43.2 ~ 52.8V |
|                       | VOLTAGE TOLERANCE Note.3   | ± 3.0%  | ± 2.0%       | ± 1.0%       | ± 1.0%         | ± 1.0%       | ± 1.0%       | ± 1.0%       |
|                       | LINE REGULATION Note.4   | ± 0.5%  | ± 0.5%       | ± 0.5%       | ± 0.5%         | ± 0.5%       | ± 0.5%       | ± 0.5%       |
|                       | LOAD REGULATION Note.5   | ± 2.0%  | ± 1.0%       | ± 0.5%       | ± 0.5%         | ± 0.5%       | ± 0.5%       | ± 0.5%       |
|                       | SETUP, RISE TIME   | 500ms, 30ms/230VAC      500ms,30ms/115VAC at full load  |              |              |                |              |              |              |
| HOLD UP TIME (Typ.)   | 55ms/230VAC    10ms/115VAC at full load  |   |              |              |                |              |              |              |
| INPUT                 | VOLTAGE RANGE  | 85 ~ 264VAC      120 ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage)   |              |              |                |              |              |              |
|                       | FREQUENCY RANGE  | 47 ~ 63Hz   |              |              |                |              |              |              |
|                       | EFFICIENCY (Typ.)  | 84.5%   | 86%          | 88%          | 88.5%          | 90%          | 90.5%        | 91%          |
|                       | AC CURRENT (Typ.)  | 1.9A/115VAC      1.2A/230VAC  |              |              |                |              |              |              |
|                       | INRUSH CURRENT (Typ.)  | COLD START 50A/230VAC   |              |              |                |              |              |              |
|                       | LEAKAGE CURRENT  | <0.75mA/ 240VAC   |              |              |                |              |              |              |
| PROTECTION            | OVER LOAD  | 110 ~ 150% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed   |              |              |                |              |              |              |
|                       | OVER VOLTAGE   | 3.8 ~ 4.45V   | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 18.75 ~ 21.75V | 28.8 ~ 33.6V | 41.4 ~ 48.6V | 55.2 ~ 64.8V |
|                       |  | Protection type : Shut down o/p voltage, re-power on to recover   |              |              |                |              |              |              |
| ENVIRONMENT           | WORKING TEMP.  | -30 ~ +70°C (Refer to "Derating Curve")   |              |              |                |              |              |              |
|                       | WORKING HUMIDITY   | 20 ~ 90% RH non-condensing  |              |              |                |              |              |              |
|                       | STORAGE TEMP., HUMIDITY  | -40 ~ +85°C, 10 ~ 95% RH non-condensing   |              |              |                |              |              |              |
|                       | TEMP. COEFFICIENT  | ± 0.03%/°C (0 ~ 50°C)   |              |              |                |              |              |              |
|                       | VIBRATION  | 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes  |              |              |                |              |              |              |
|                       | OVER VOLTAGE CATEGORY  | III; Compliance to BS EN/EN61558, BS EN/EN50178, BS EN/EN60664-1, BS EN/EN62477-1; altitude up to 2000 meters   |              |              |                |              |              |              |
| SAFETY & EMC (Note 8) | SAFETY STANDARDS   | UL 62368-1, TUV BS EN/EN62368-1, BS EN/EN60335-1, BS EN/EN61558-1/-2-16, GB 4943.1, BSMI CNS15598-1, EAC TP TC 004,S/NZS62368.1(by CB),KC K60950-1(for LRS-100-12/24 only), BIS IS13252(Part1): 2010/IEC 60950-1: 2005(NOTE 9) approved |              |              |                |              |              |              |
|                       | WITHSTAND VOLTAGE  | I/P-O/P:4KVAC    I/P-FG:2KVAC    O/P-FG:1.25KVAC  |              |              |                |              |              |              |
|                       | ISOLATION RESISTANCE   | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH  |              |              |                |              |              |              |
|                       | EMC EMISSION   | Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN55014, BS EN/EN61000-3-2,-3, GB17625.1,GB/T 9254.1, BSMI CNS15936, EAC TP TC 020,KC KN32,KN35(for LRS-100-12/24 only)  |              |              |                |              |              |              |
|                       | EMC IMMUNITY   | Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61000-6-2 (BS EN/EN50082-2),BS EN/EN55035, heavy industry level, EAC TP TC 020,KC KN32,KN35(for LRS-100-12/24 only)   |              |              |                |              |              |              |
| OTHERS                | MTBF   | 3348.9K hrs min.    Telcordia SR-332 (Bellcore) ; 677.4Khrs min.    MIL-HDBK-217F (25°C)  |              |              |                |              |              |              |
|                       | DIMENSION  | 129*97*30mm (L*W*H)   |              |              |                |              |              |              |
|                       | PACKING  | 0.34Kg ; 40pcs/14.6Kg/0.92CUFT  |              |              |                |              |              |              |
| NOTE                  | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.<br>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.<br>3. Tolerance : includes set up tolerance, line regulation and load regulation.<br>4. Line regulation is measured from low line to high line at rated load.<br>5. Load regulation is measured from 0% to 100% rated load.<br>6. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.<br>7. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m(6500ft).<br>8. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> )<br>9. Some model may not have the BIS logo, please contact your MEAN WELL sales for more information.<br>× Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a> |   |              |              |                |              |              |              |


## Block Diagram

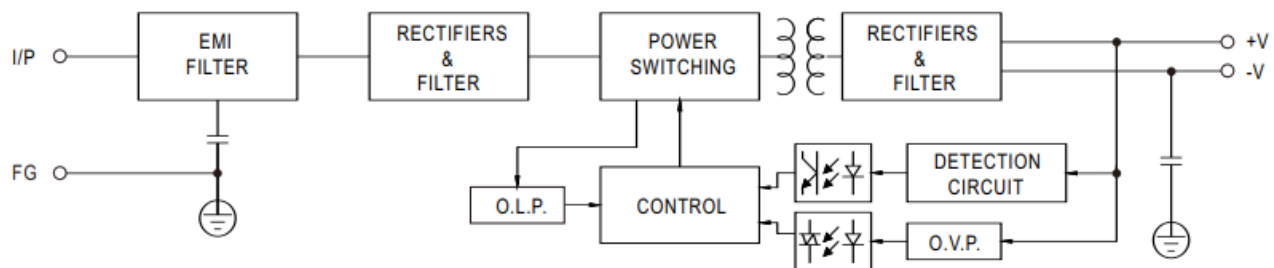


## Derating Curve

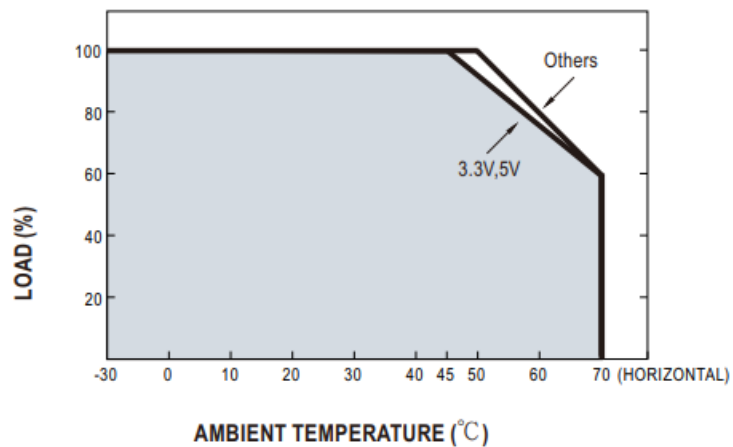

## Static Characteristics

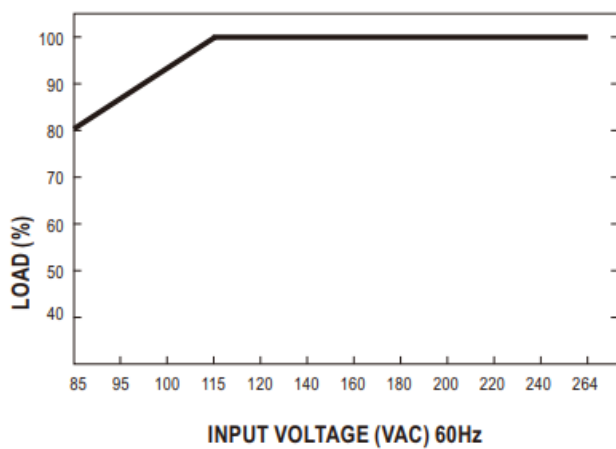

## Mechanical Specification

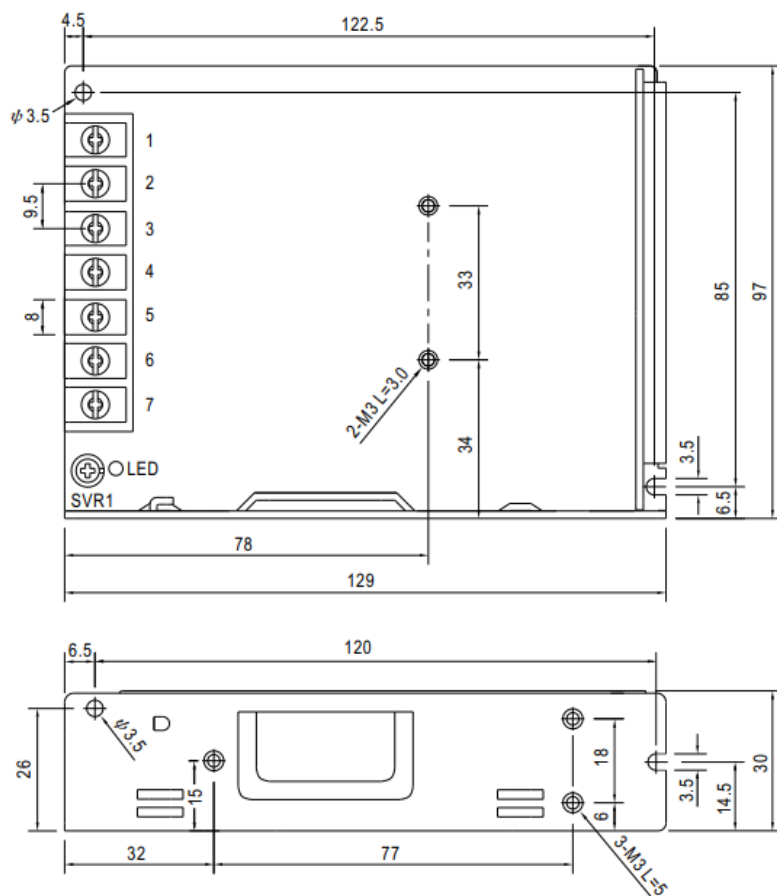

Terminal Pin No. Assignment

| Pin No. | Assignment | Pin No. | Assignment   |
|---------|------------|---------|--------------|
| 1       | AC/L       | 4,5     | DC OUTPUT -V |
| 2       | AC/N       | 6,7     | DC OUTPUT +V |
| 3       | FG $\perp$ |         |              |

## Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>

## Documents / Resources



[MEAN WELL LRS-100 Series 100W Single Output Switching Power Supply](#) [pdf] Owner's Manual

LRS-100 Series, LRS-100 Series 100W Single Output Switching Power Supply, 100W Single Output Switching Power Supply, Single Output Switching Power Supply, Output Switching Power Supply, Switching Power Supply, Power Supply, Supply

## References

- [TÜV Rheinland - Home | US | TÜV Rheinland](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.