




MEAN WELL ODLV-45-12 45W PWM Output LED Driver Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL ODLV-45-12 45W PWM Output LED Driver Owner's Manual 



45W PWM Output LED Driver
ODLV-45 series





IS 15885(Part 2/Sec13)



R-41027766

for ODLV-45-12,24,48 only)



User's Manual



http://www.meanwell.com.cn/Upload/PDF/LED_EN.pdf

Contents

- 1 Features
- 2 Applications
- 3 Description
- 4 Model Encoding
- 5 SPECIFICATION
- 6 DIMMING OPERATION
- 7 OUTPUT LOAD vs TEMPERATURE
- 8 STATIC CHARACTERISTIC
- 9 BLOCK DIAGRAM
- 10 DRIVING METHODS OF LED MODULE
- 11 MECHANICAL SPECIFICATION
- 12 Documents / Resources
 - 12.1 References

Features

- Constant Voltage PWM style output with frequency 1KHz
- Plastic housing with class II design
- Built-in active PFC function
- No load power consumption<0.5W (Blank-Type)
- IP67 rating for indoor or outdoor installations
- Function options: 2 in 1 dimming (dim-to-off); Auxiliary DC output
- 3 years warranty


Applications

- LED strip lighting
- Indoor LED lighting
- LED decorative lighting
- LED architecture lighting

Description

ODLV-45 series is a 45W AC/DC LED driver featuring the constant voltage mode PWM style output design. ODLV-45 operates from 90~295VAC and offers models with different rated voltage ranging between 12V and 60V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -20°C ~+85°C case temperature under free air convection. The design of plastic housing and IP67 ingress protection level allows this series to fit indoor wet applications. ODLV-45 is equipped with various function options, such as dimming methodologies, so as to provide the design flexibility for LED lighting system.

Model Encoding

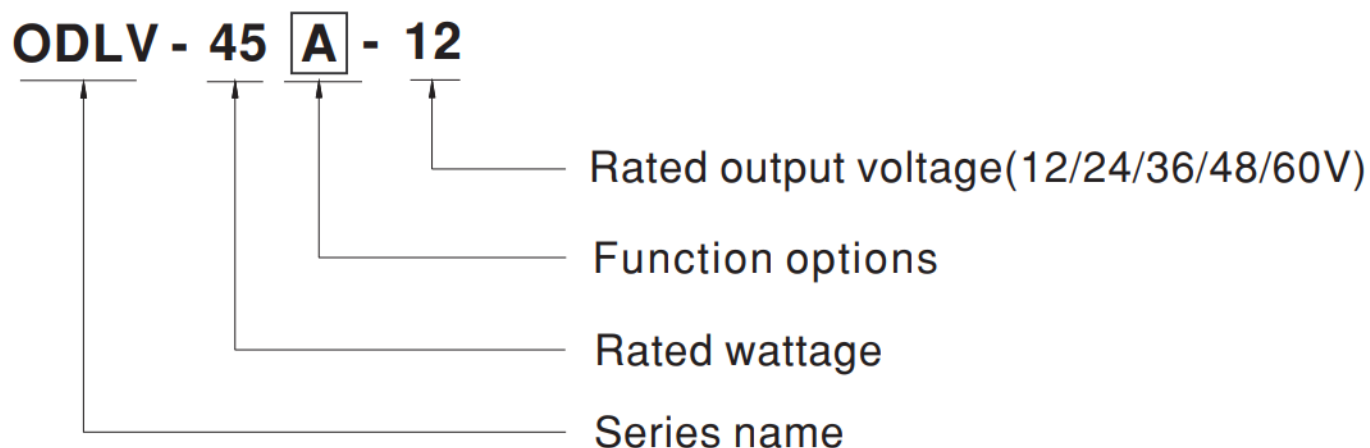

Type	Function	Note
Blank	2 in 1 dimming (0~10VDC and 10V PWM)	In Stock
A	2 in 1 dimming and Auxiliary DC output	In Stock


SPECIFICATION

MODEL		ODLV-45 -12	ODLV-45 -24	ODLV-45 -36	ODLV-45 -48	ODLV-45 -60
OUTPUT	DC VOLTAGE	12V	24V	36V	48V	60V
	RATED CURRENT	3.0A	1.88A	1.25A	0.94A	0.75A
	RATED POWER	36W	45.12W	45W	45.12W	45W
	DIMMING RANGE	0~100%				
	VOLTAGE TOLERANCE	±10%				
	PWM FREQUENCY (Typ.)	1KHz(±20%)				
	SETUP TIME Note.3	500ms / 230VAC 1200ms/115VAC				

	AUXILIARY DC OUTPUT Note.4	Nominal 12V(deviation 11.4~12.6)@50mA for A-Type only				
INPUT	VOLTAGE RANGE Note.2	90 ~ 295VAC (Please refer to “STATIC CHARACTERISTIC” section)				
	FREQUENCY RANGE	47 ~ 63Hz				
	POWER FACTOR (Typ.)	PF>0.95/115VAC, PF>0.92/230VAC, PF>0.9/277VAC@full load (Please refer to “POWER FACTOR (PF) CHARACTERISTIC” section)				
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≥60%/115VAC,230VAC; @load≥75%/277VAC) (Please refer to “TOTAL HARMONIC DISTORTION” section)				
	EFFICIENCY (Typ.)	84%	86%	88%	88%	90%
	AC CURRENT (Typ.)	0.6A / 115VAC 0.4A / 230VAC 0.3A / 277VAC				
	INRUSH CURRENT(Typ.)	COLD START 30A(twidth=150μs measured at 50% Ipeak) at 230VAC; Per NEMA 410				
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	32 units (circuit breaker of type B) / 32 units (circuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC				
	NO LOAD POWER CONSUMPTION	<0.5W for Blank-Type, <1.2W for A-Type				
PROTECTION	SHORT CIRCUIT	Shut down O/P voltage, re-power on to recovery				
	OVER CURRENT	105 ~ 115% Protection type : Hiccup mode, recovers automatically after fault condition is removed				
ENVIRONMENT	WORKING TEMP.	Tcase=-20 ~ +85°C (Please refer to “ OUTPUT LOAD vs TEMPERATURE” section)				
	MAX. CASE TEMP.	Tcase=+85°C				
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
	STORAGE TEMP. , HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH				


	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC	SAFETY STANDARDS	UL8750(type"HL"),CSA C22.2 NO.250.13-12;ENEC BS EN/EN61347-1 & BS EN/EN61347-2-13 independent, BS EN/EN62384,GB19510.1,GB19510.14; BIS IS15885(for ODLV-45-12,24,48 only), EAC TP TC 004,IP67 approved
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH
	EMC EMISSION	Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@load≥60%) ; BS EN/EN61000-3-3,GB17743, GB17625.1,EAC TP TC 020
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level(surge immunity: Line-Line:1KV),EAC TP TC 020
OTHERS	MTBF	388.02K hrs min. MIL-HDBK-217F (25°C)
	DIMENSION	111*77*28.5mm (L*W*H)
	PACKING	0.42Kg;24pcs/11Kg/ 0.72CUFT
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature.</p> <p>2. De-rating may be needed under low input voltages. Please refer to "Stack CHARACTERISTIC" sections for details.</p> <p>3. Length of set up time is measured at cold first start. Turning ON/OFF the driver may lead to increase of the set up time.</p> <p>4. Aux. 12V will be damaged with short circuit; It will not be available with dimming off or output no load condition.</p> <p>5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p> <p>6. The ambient temperature derating of 3.5°C/1000m with finless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).</p> <p>7. For any application note and lpm water proof function installation caution, please refer our user manual before using.</p> <p>https://www.meanwell.com/Upload/PDF/LED_EN.pdf</p> <p>8. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains.</p> <p>※ Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>	

DIMMING OPERATION

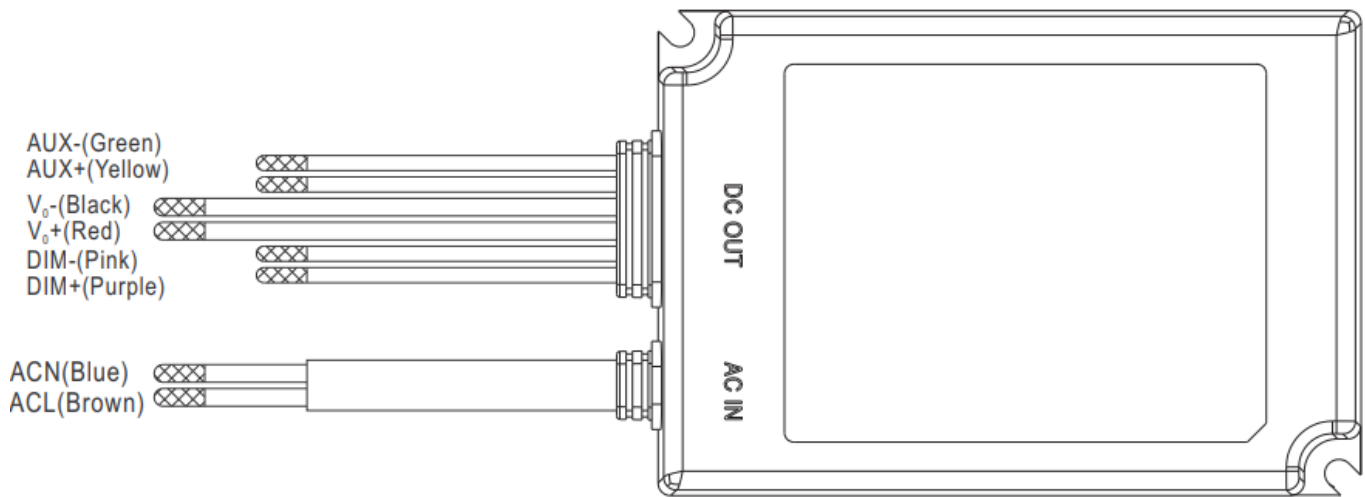

❖ Dimming principle for PWM style output



- Dimming is achieved by varying the duty cycle of the output current.

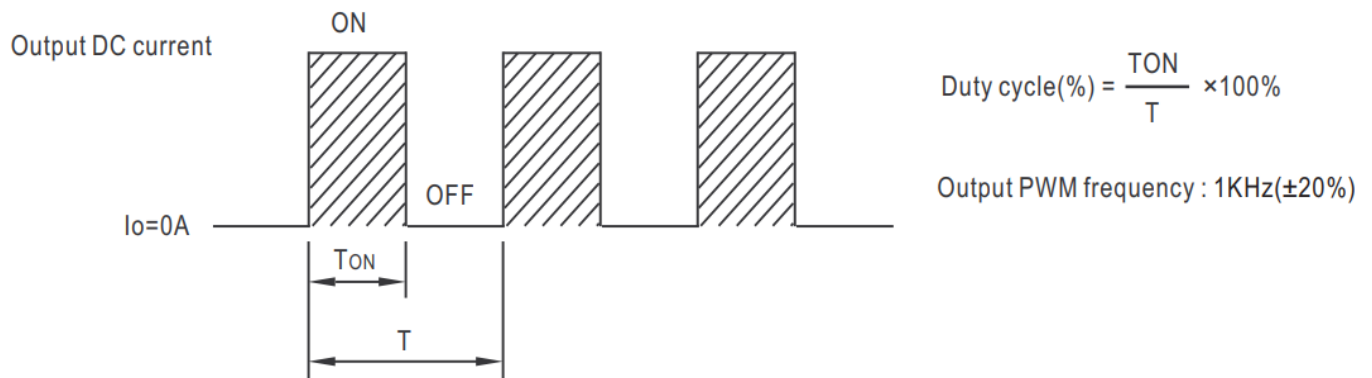



❖ 2in 1dimming function

© Applying additive 0~ 10VDC

● Applying additive 0 ~ 10VDC

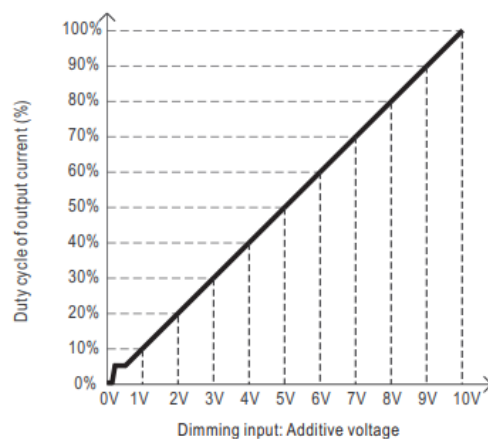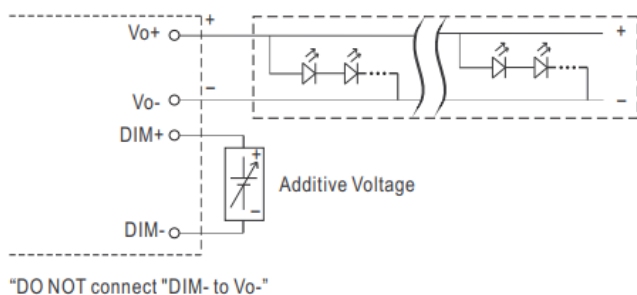



● Applying additive 10V PWM signal (frequency range 300~3000Hz):

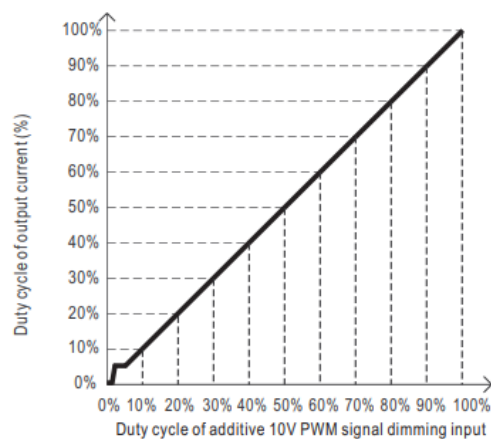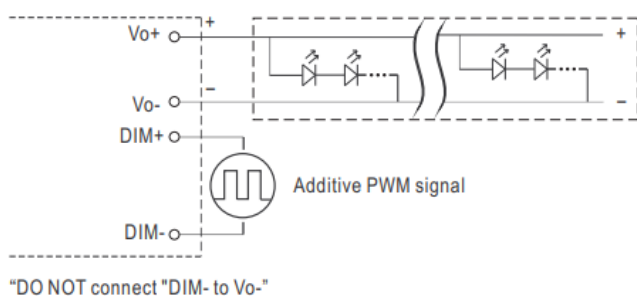


Note :

1. Min. duty cycle of output current is about 8% and the output current is not defined when $0\% < I_{out} < 8\%$.
2. The duty cycle of output current could drop down to 0% when dimming input is about 0Vdc or 10V PWM signal with 0% duty cycle.

OUTPUT LOAD vs TEMPERATURE

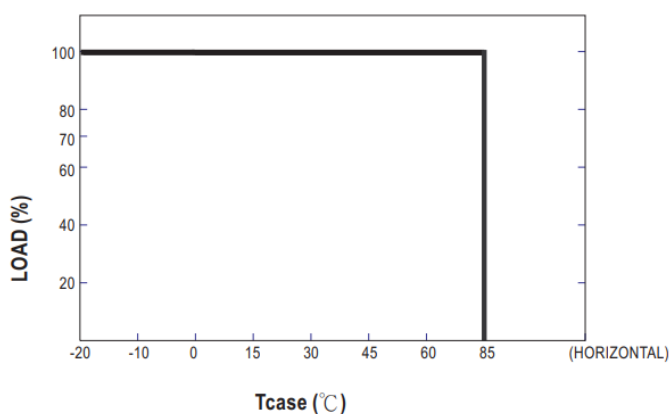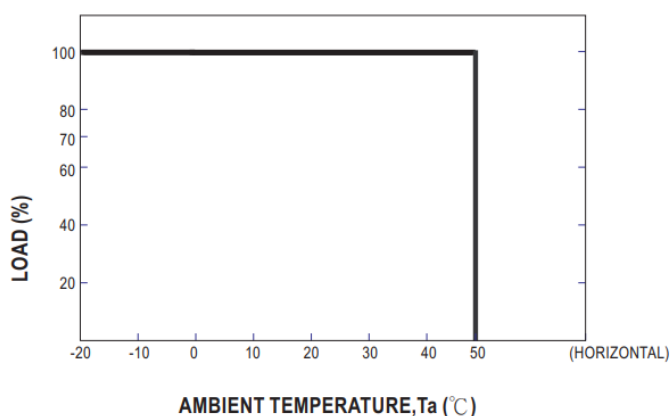

STATIC CHARACTERISTIC

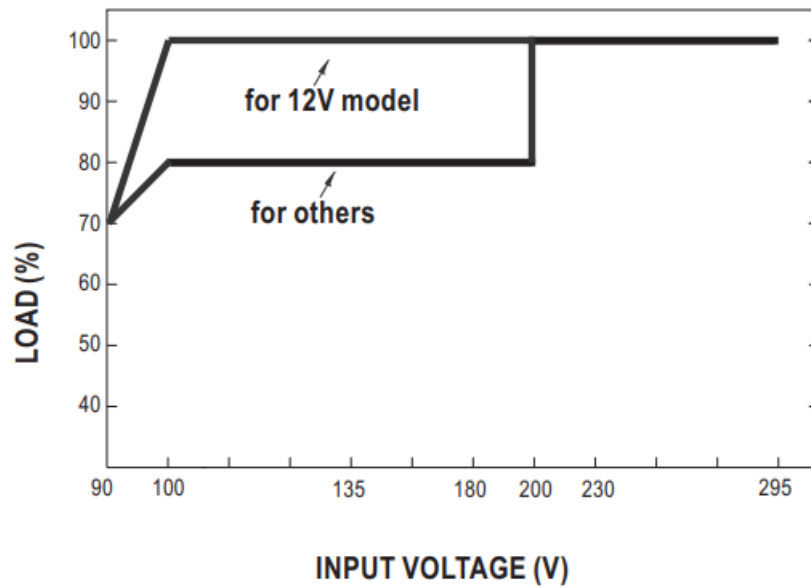


✘ De-rating is needed under low input voltage.

✘ De-rating is needed under low input voltage.


POWER FACTOR (PF) CHARACTERISTIC

✘ Tcase at 75°C

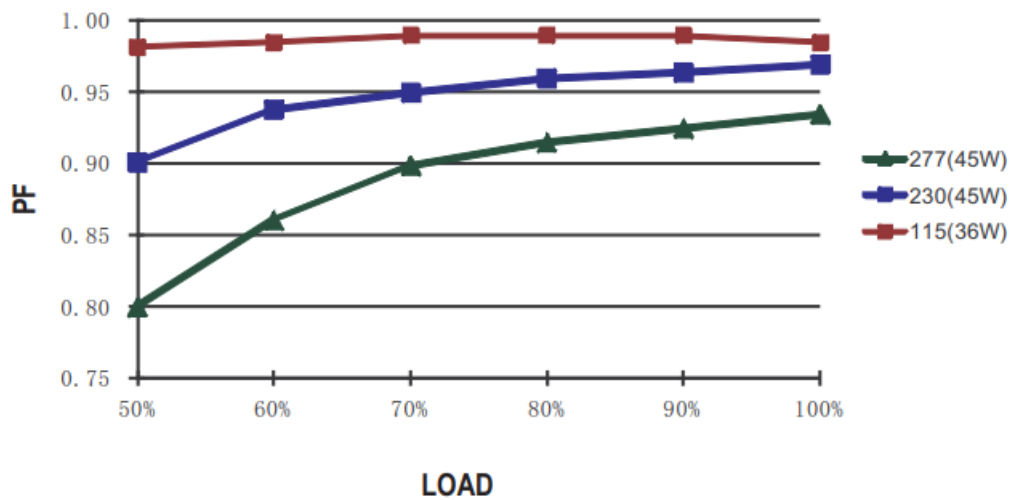


TOTAL HARMONIC DISTORTION (THD)

✘ 60V Model, Tcase at 75°C

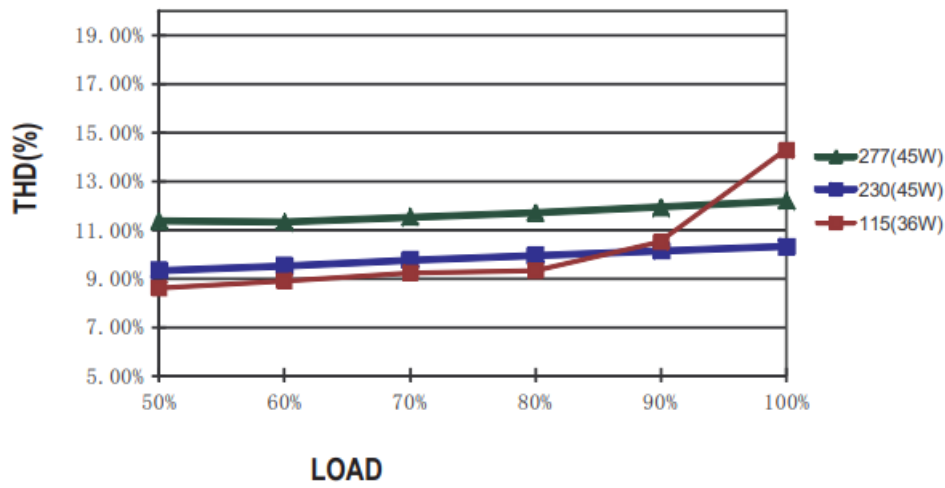


EFFICIENCY vs LOAD


ODLV-45 series possess superior working efficiency that up to 90% can be reached in field applications. 60V Model, Tcase at 75

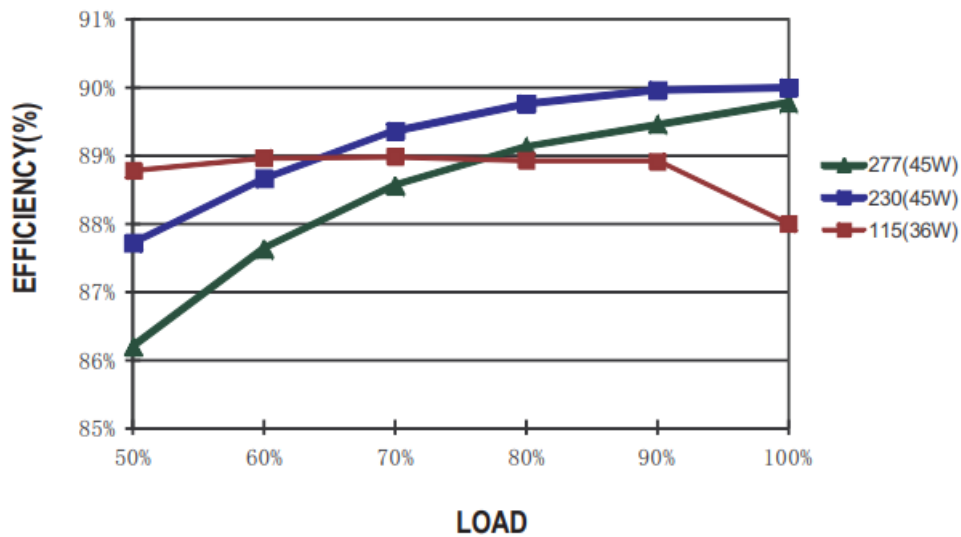

BLOCK DIAGRAM

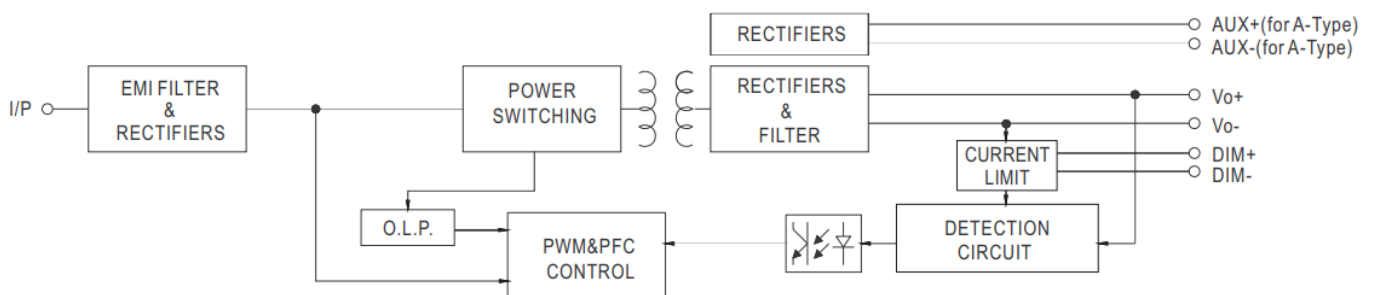

DRIVING METHODS OF LED MODULE

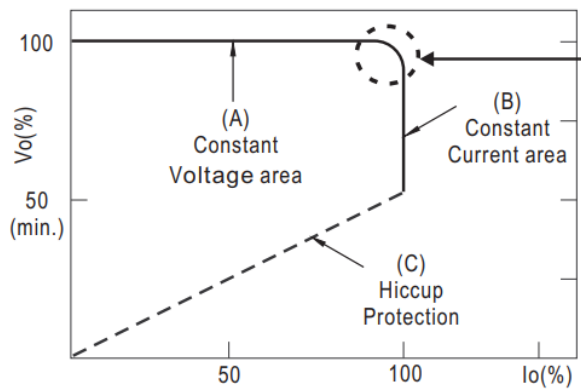


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.

MECHANICAL SPECIFICATION

X Blank-Type:

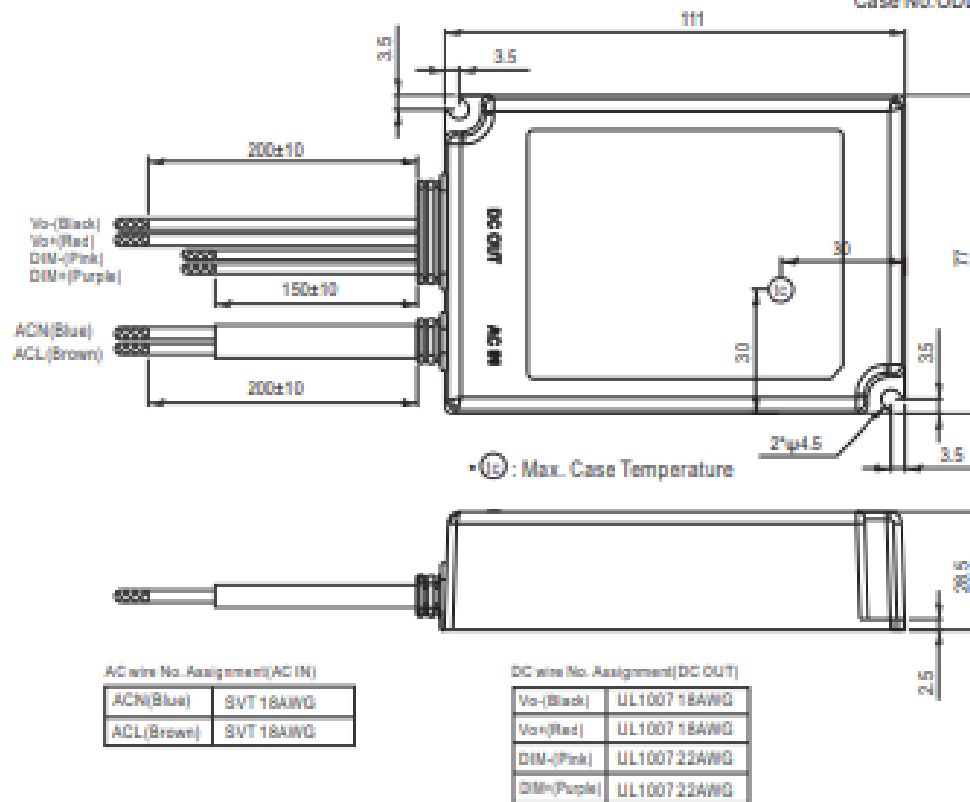

X A-Type:

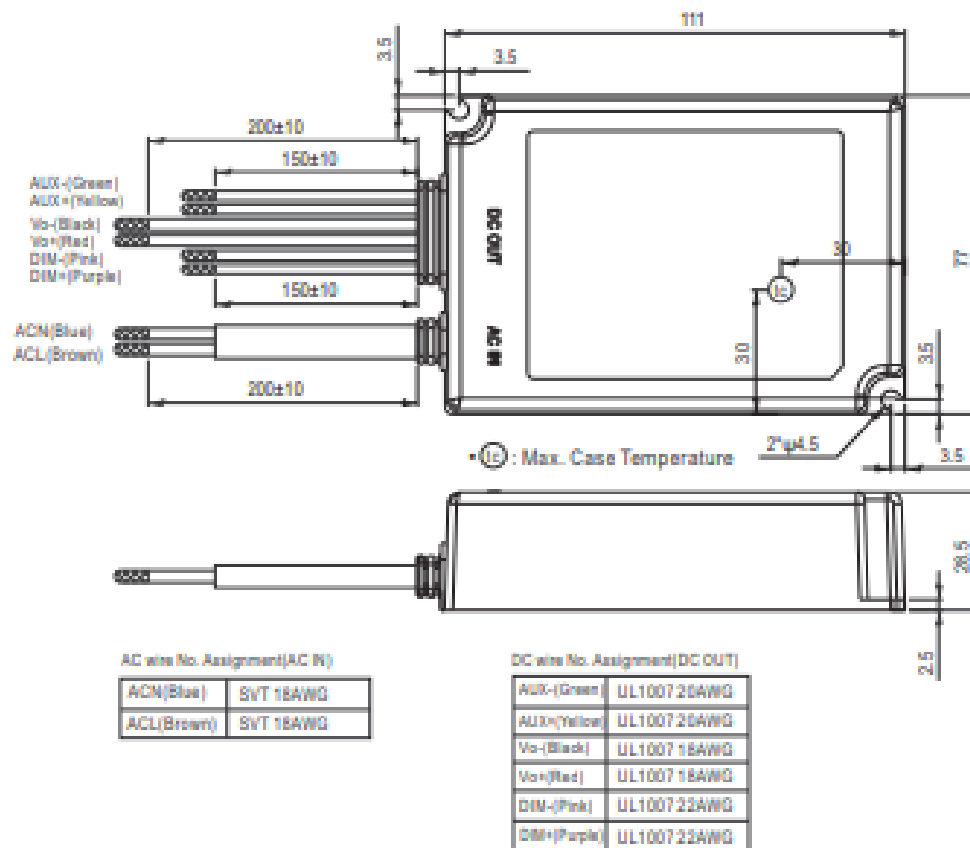


INSTALLATION MANUAL

Please refer to : <http://www.meanwell.com/manual.htm>



File Name: ODLV-45-SPEC 2022-01-24

Documents / Resources

	<p>MEAN WELL ODLV-45-12 45W PWM Output LED Driver [pdf] Owner's Manual ODLV-45-12 45W PWM Output LED Driver, ODLV-45-12, 45W PWM Output LED Driver, Output LED Driver, LED Driver, Driver</p>
---	---

References

- [MEAN WELL Installation Manual-MEAN WELL Switching Power Supply Manufacturer](#)