



**OWA-200E Series
200W Single Output
Moistureproof Adaptor**



MEAN WELL OWA-200E Series 200W Single Output Moistureproof Adaptor Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL OWA-200E Series 200W Single Output Moistureproof Adaptor Owner's Manual 

Contents

- [1 MEAN WELL OWA-200E Series 200W Single Output Moistureproof Adaptor](#)
- [2 Product Specifications](#)
- [3 Features](#)
- [4 Description](#)
- [5 200W Single Output Moistureproof Adaptor](#)
- [6 Installation Manual](#)
- [7 Frequently Asked Questions \(FAQ\)](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)



MEAN WELL OWA-200E Series 200W Single Output Moistureproof Adaptor



Product Specifications

MODEL	DC VOLTAGE	RATED CURRENT	RATED POWER
OWA-200E-12	12V	15A	180W
OWA-200E-20	20V	10A	200W
OWA-200E-24	24V	8.3A	199W
OWA-200E-36	36V	5.55A	199W
OWA-200E-42	42V	4.75A	199W

MODEL		OWA-200E-12	OWA-200E-20	OWA-200E-24	OWA-200E-36	OWA-200E-42	OWA-200E-48	OWA-200E-54
OUTPUT	DC VOLTAGE	12V	20V	24V	36V	42V	48V	54V
	RATED CURRENT	15A	10A	8.3A	5.55A	4.75A	4.17A	3.71A
	RATED POWER	180W	200W	199W	199W	199W	200W	200W
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	350mVp-p
	VOLTAGE TOLERANCE Note.3	±5.0%	±4.0%	±4.0%	±3.0%	±3.0%	±3.0%	±3.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±5.0%	±4.0%	±4.0%	±3.0%	±3.0%	±3.0%	±3.0%

	SETUP, RISE TIME Note.4	500ms, 80ms 230VAC						
	HOLD UP TIME (Typ.)	10ms at full load 230VAC						
INPUT	VOLTAGE RANGE	180 ~ 264VAC 254 ~ 370VDC						
	FREQUENCY RANGE	47 ~ 63Hz						
	POWER FACTOR (Typ.)	PF>0.96/230VAC at full load						
	EFFICIENCY(Typ.)	91%	92.5%	93%	94%	94%	94%	94%
	AC CURRENT (Typ.)	1.1A / 230VAC						
	INRUSH CURRENT (Typ.)	COLD START 65A(twidth=550μs measured at 50% Ipeak) at 230VAC						
	LEAKAGE CURRENT	<0.25mA / 240VAC						
	NO LOAD CONSUMPTION	<0.15W						
PROTECTION	OVER CURRENT	105% ~ 150%						
		Protection type : Hiccup mode, recovers automatically after fault condition is removed						
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed						
	OVER VOLTAGE	13 ~ 18V	22 ~ 27V	27 ~ 34V	41 ~ 49V	46 ~ 57V	52 ~ 65V	59 ~ 70V
		Protection type : Shut down o/p voltage, re-power on to recover						
OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover							
ENVIRONMENT	WORKING TEMP.	-40 ~ +70°C (Refer to “Derating Curve”)						
	WORKING HUMIDITY	20 ~ 95% RH non-condensing						
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH						
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)						
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes						
	SAFETY STANDARDS	DEKRA EN61558-1,-2-16; DEKRA EN60335-1(except for OWA-200E-48,54); EA C TP TC 004, IP67 (for power body) approved						

SAFE TY & EMC	WITHSTAND VOLTAGE	I/P-O/P:4.2KVAC
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH
	EMC EMISSION	Compliance to EN55032(CISPR32)ClassB, EN55035, EN55014-1, EN61000-3-2/3; EAC TP TC 020
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11,EN55014-2,EN55024, light industry level (surge L-N: 2KV), EAC TP TC 020
OTHERS	MTBF	2677.8K hrs min. Telcordia SR-332 (Bellcore) 267.6K hrs min. MIL-HDBK-217F (25°C)
	DIMENSION	195*68*39.5mm
	PACKING	1.32Kg; 9pcs/ 12.88Kg/ 0.79CUFT
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.</p> <p>5. For battery charging purpose had better operation with a BMS controller.</p> <p>※ Product Liability Disclaimer For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx</p>	

Features

- Input range 180~264VAC
 - Class II power unit, no FG
 - Built-in active PFC function
 - High efficiency up to 94%
 - No load power consumption <0.15W
 - Energy efficiency Level VI
 - Comply with EU ErP and CoC Version 5
 - Compliance to IEC/EN 61558-1,-2-16 and IEC/EN 60335-1 (except for OWA-200E-48,54) for household appliance
 - Fanless design, cooling by free air convection
 - Protections: Short circuit / Overload / Over voltage / Over temperature
 - 5 years warranty
 - Various DC plug quick adapter accessory available
- (Plug kit sold separately, please refer to: <https://www.meanwell.com/upload/pdf/DCplug.pdf>)

Applications

- Industrial field PC adaptor
- POS or KIOSK system
- Portable Battery charger
- Electric Lawn mower charger
- General electronic products in dusty or humid environment
- Household Device

GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Description


OWA-200E is a 200W AC/DC, class II (no FG) external power supply series pinpointing the moistureproof feature. The fully-potted silicone inside the plastic enclosure enhances the heat dissipation; it also benefits that the power body of OWA-200E achieves IP67 level so that this series specializes the application in which the damp, humidity or dust resistance is needed for the external power supply. OWA-200E follows the latest energy efficiency demand with the no load power consumption less than 0.15W. It is certified with EN61558-2-16; moreover, the compliance to EN60335-1 for selected models can greatly simplify the system design such as household or charging application.

OWA-200E adopts the input range from 180VAC to 264VAC and incorporates a built-in PFC function. With the working efficiency up to 94%, OWA-200E is cooled by free air convection; the working temperature ranges from -40°C to +70°C .


Model Encoding

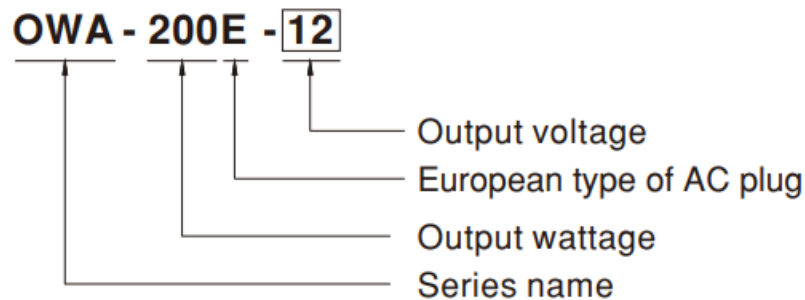


Block Diagram

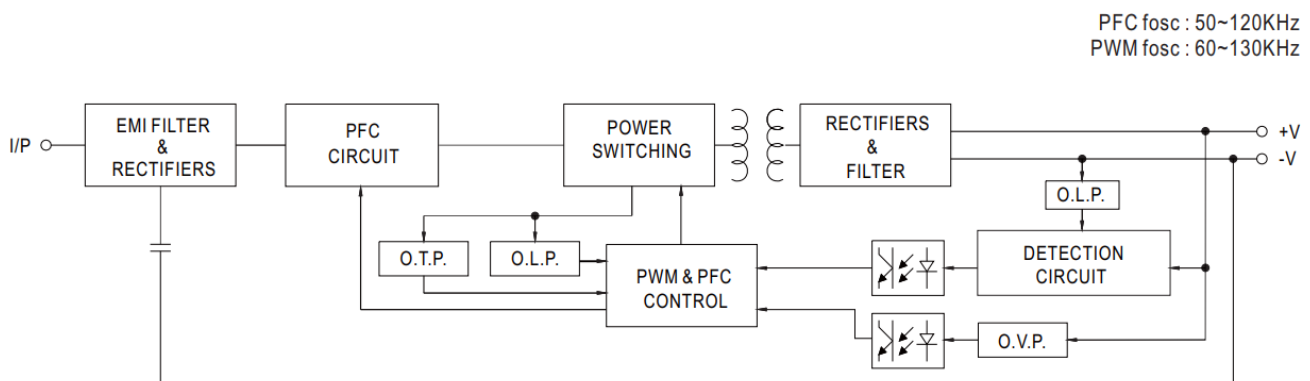


Derating Curve

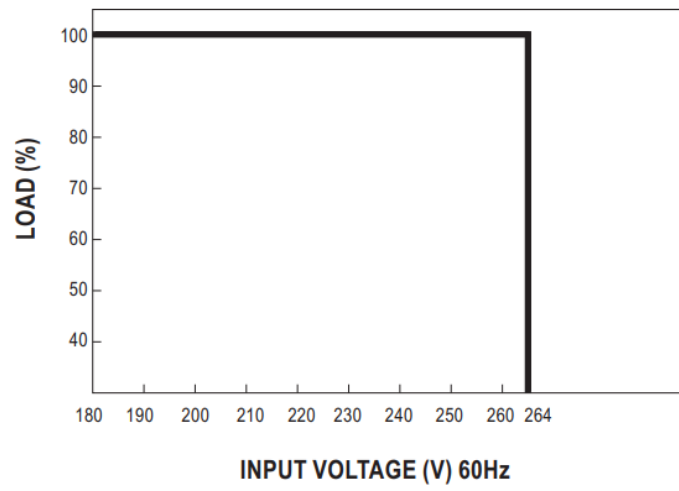


Static Characteristics

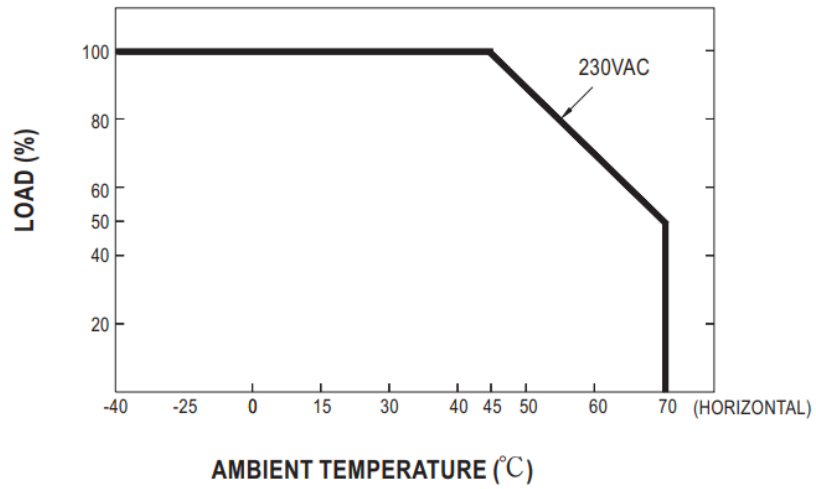

Power Factor Characteristic

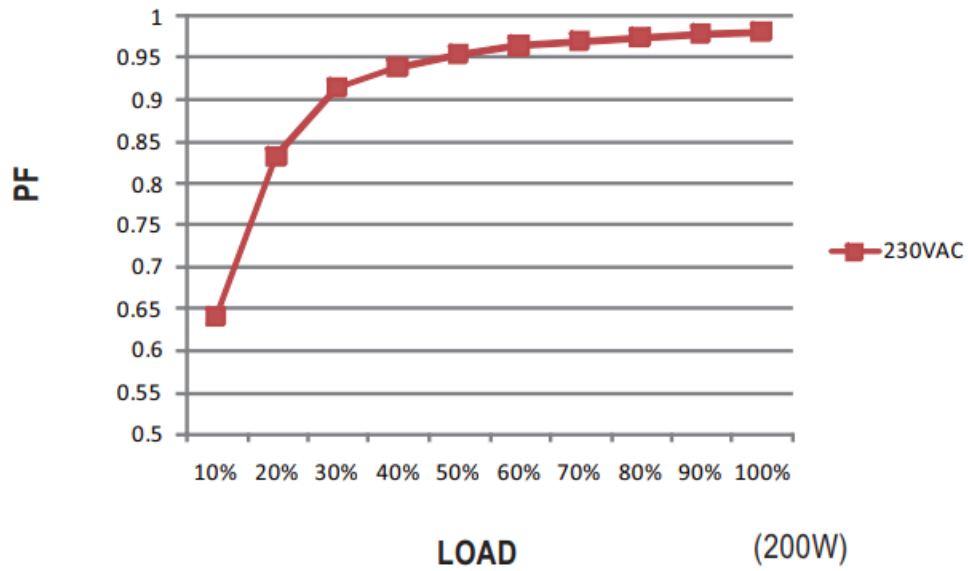


EFFICIENCY vs LOAD (48V Model)

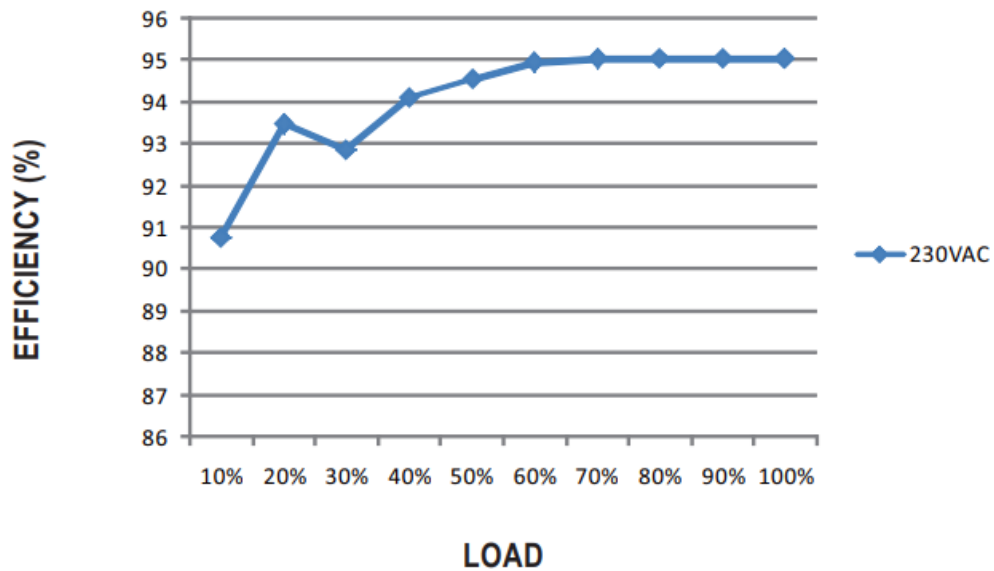


200W Single Output Moistureproof Adaptor

Mechanical Specification

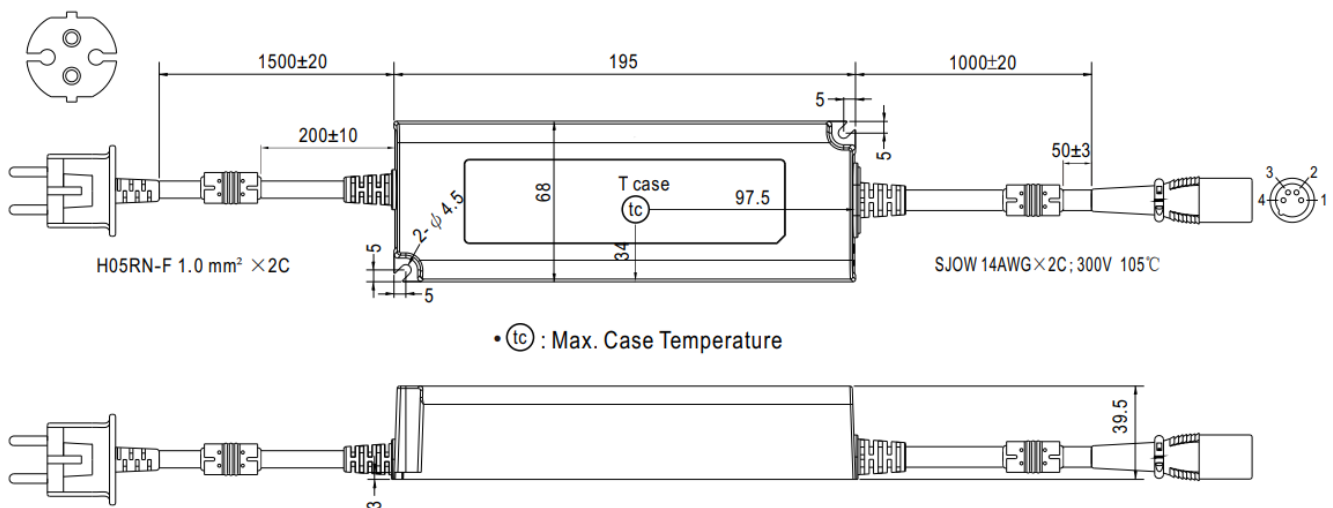


Input Plug Type

- All standard models: CEE 7/7


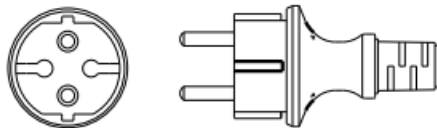






DC output plug

- Standard plug:

XLR4P, NEUTRIK NC4MX equivalent	Type No.	Pin Assignment		Available for all model (Current rating: 15A max.)
		PIN No.	Output	
	XLR4P	1	+Vo	
		2	+Vo	
		3	-Vo	
		4	-Vo	

• **Optional DC plug:**

Tuning Fork Style	Type No.	A	B	C	Adaptation model
		OD	ID	L	
 (Straight)	P1J	5.5	2.1	11.0	Available for 36V/48V/54V (Current rating: 7.5A max.)
	P1M	5.5	2.5	11.0	
MOLEX 39-01-2060 (4.2mm) equivalent	Type No.	Pin Assignment			Available for all model (Current rating: 15A max.)
 FG not connected to output connector	C6P	PIN No.	Output		
		1	+Vo		
		2	+Vo		
		3	+Vo		
		4	-Vo		
		5	-Vo		
		6	-Vo		

KYCON KPPX-4P equivalent	Type No.	Pin Assignment		Available for all model (Current rating: 15A max.)
 KYCON KPPX-4P equivalent	R7B	PIN No.	Output	
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
LLT-M19-20002F307 equivalent	Type No.	Pin Assignment		Available for all model (Current rating: 15A max.)
	M19	PIN No.	Output	
		1	+Vo	
		2	-Vo	
DW-M15-02F equivalent	Type No.	Pin Assignment		Available for 20V/24V/36V/48V/54V (Current rating: 10A max.)
	M15	PIN No.	Output	
		1	+Vo	
		2	-Vo	
NEUTRIK XLR NC4FX equivalent	Type No.	Pin Assignment		Available for all model (Current rating: 15A max.)
	MIC4	PIN No.	Output	
		1	+Vo	
		2	+Vo	
		3	-Vo	
		4	-Vo	

For details, please contact MEAN WELL.

Recommend Mounting Direction



Installation Manual

Please refer to: <http://www.meanwell.com/manual.html>

Frequently Asked Questions (FAQ)


Q: Can I use the OWA-200E series adaptor with devices that require different voltages?

A: No, it is essential to match the DC voltage output of the adaptor with the device specifications to prevent damage.

Q: What should I do if the adaptor gets wet?

A: If the adaptor comes into contact with water, disconnect it from the power source immediately and allow it to dry completely before further use.

Documents / Resources

	<p>MEAN WELL OWA-200E Series 200W Single Output Moistureproof Adaptor [pdf] Owner's Manual</p> <p>OWA-200E-12, OWA-200E-20, OWA-200E-24, OWA-200E-36, OWA-200E-42, OWA-200E-48, OWA-200E-54, OWA-200E Series 200W Single Output Moistureproof Adaptor, OWA-200E Series, 200W Single Output Moistureproof Adaptor, Output Moistureproof Adaptor, Moistureproof Adaptor</p>
---	---

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.