



MEAZOR 3D M0102-U Multifunctional Laser Measure User Manual

[Home](#) » [MEAZOR 3D](#) » MEAZOR 3D M0102-U Multifunctional Laser Measure User Manual 

Contents

- 1 MEAZOR 3D M0102-U Multifunctional Laser Measure
- 2 Product Information
- 3 Product Usage Instructions:
- 4 SAFETY INSTRUCTIONS
- 5 BASIC OPERATION
- 6 Open Flip Stand
- 7 SETUP 3D ADAPTER
- 8 Tilt Mode
- 9 CURVE SCANNER
- 10 MEAZOR APP
- 11 Documents / Resources
- 12 Related Posts

MEAZOR 3D

MEAZOR 3D M0102-U Multifunctional Laser Measure



Product Information

The MEAZOR 3D is a portable and multifunctional measuring device. It consists of a 131ft (40m) laser distance module and a 4096-grade angle sensor module, providing high accuracy measurements for straight lines, curves, and compound shapes floorplans. The device is equipped with a plotting app for Android and iOS, allowing users to collect data, draw floor plans, display in 3D, receive documents, and share them. There are two editions available:

- Standard edition (Model M0102): It includes essential functions for measurement.
- Premium combo (Model M0102-U): It includes the Ultra 3D Adapter, enabling obstacle avoidance and achieving higher precision.

The MEAZOR 3D is classified as a Class 2 laser product. It is important not to stare directly at the laser or shoot it at other people or animals to avoid eye damage. While the product meets strict standards and testing regulations, external environmental influences and interference may still affect its performance.

Product Usage Instructions:

Setup 3D Adapter:

Note: The Ultra 3D Adapter is only included in the premium combo edition (M0102-U). For standard model (M0102) users, the Ultra 3D Adapter shown in the picture needs to be purchased separately if required. The Master Tripod shown in the picture also needs to be purchased separately if required.

1. Mount the handle and tighten the tripod.

2. Adjust the tripod feet until the two horizontal bubble levels are centered.
3. Install MEAZOR 3D by magnetically attaching the device to the Adapter. Ensure that the device is well-connected to the Adapter and confirm proper installation.
4. Open the vertical stand and adjust the Adapter until it is level with the ground.
5. Enter the point scanner/curve scanner function, wait 5 seconds for level calibration, and then tap the screen to skip the Setup Guide and start scanning.

Laser Measure:

Note: The following instructions apply to both the standard edition (M0102) and the premium combo edition (M0102-U).

1. Switch Units: Set the measurement units at initialization or in the setup page. Users can select between imperial (Yard, Feet, Inch, Inch fraction) or metric units (m, cm, mm).
2. Save Data: If MEAZOR 3D is connected via Bluetooth to MEAZOR/3rd party App, pressing the middle section (measuring result) or the Record Button will record and send data to the connected App. If not connected via Bluetooth, pressing the middle section will clear data. If MEAZOR 3D performs a measuring task offline (not connected to the App), press Save Data on the touch screen to record measuring results to the built-in data storage.
3. Switch Align Mode:
 - BACK ALIGN: Measure along the bottom of MEAZOR's roller as a starting point.
 - STAND ALIGN: With the stand open, measure from the bottom of the stand.
 - TRIPOD ALIGN: Measure from the center of the tripod hole.
 - FRONT ALIGN: Measure from the top of the product.
4. Clear / Send: Pressing this button will clear data if MEAZOR 3D is not connected via Bluetooth. If connected, it will send data to the connected App.

Ensure to follow the safety instructions provided in the user manual for the safe use of the multifunctional measure.

Multifunctional Laser Measure

USER MANUAL Model : M0102-U / M0102

- The MEAZOR 3D is a portable and multifunctional measuring device. It is composed of a 131fts (40m) laser distance module and a 4096-grade angle sensor module with high accuracy, which empowers its ability to measure straight lines, curves, and compound shapes floorplans. MEAZOR 3D is equipped with a plotting app for Android and iOS, allowing data collection, floor plan drawing, 3D display, document receiving, and sharing.
- The standard edition (Model M0102) can complete the above essential functions.
- The premium combo (M0102-U) is equipped with the Ultra 3D Adapter and can is capable of obstacle avoidance and achieve higher precision

SAFETY INSTRUCTIONS

For the safe use of this multifunctional measure, please read the instructions below carefully.

The device is categorized as a Class 2 laser product. DO NOT stare directly at the laser or shoot the laser at other people or animals, or it will cause damage to the eyes.



This product is in accordance with strict standards and testing regulations through its development and manufacturing, but this does not preclude the product from being subjected to external environmental influences and interference.

- Please DO NOT use this product in extremely hot ($>40^{\circ}\text{C}$) or extremely cold ($<0^{\circ}\text{C}$) environments.
- Please DO NOT use this product in an explosive or corrosive environment.
- Please DO NOT use this product near medical devices.
- Please DO NOT use the product on a plane.

Disposal:


This product contains a rechargeable lithium battery, which must NOT be disposed of with household waste. Please dispose of the product in accordance with the national regulations in force in your country/region.

Scope of Responsibility:

We will not be responsible for any damage caused by improper use below:

- Using the product without instruction;
- Use of accessories from other manufacturers without approval from us;
- Carrying out modification or conversion of the product.


BASIC OPERATION

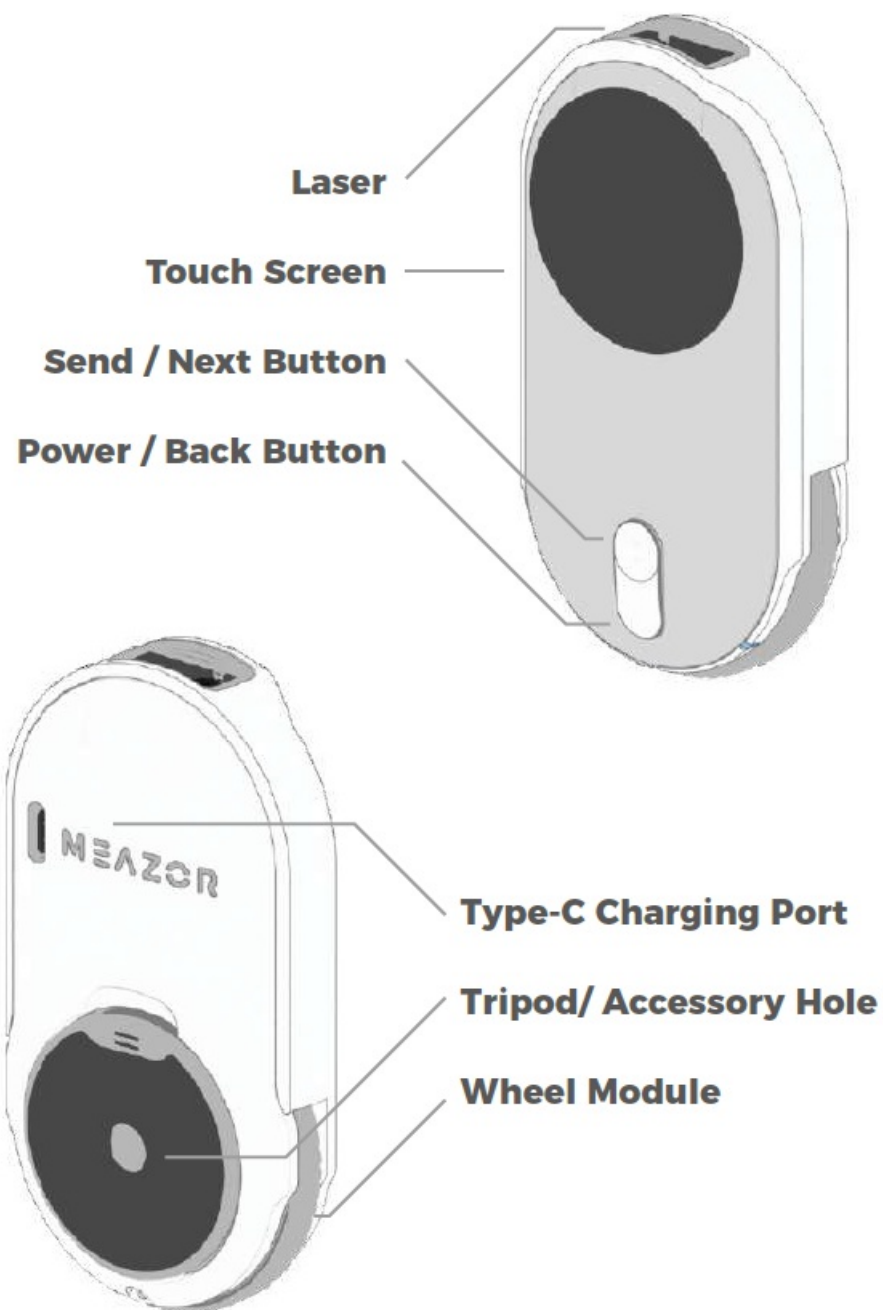

You can swipe left and right on the main menu to switch between functions or toggle the wheel to switch between functions quickly. Tap on the selected function icon to enter the function page.

- Power Button 2 sec > ON / OFF
- Sleep 30sec > Sleep
- Turn Off 2 min > OFF
- Charging 1.5-2 hrs > 100%


Open Flip Stand

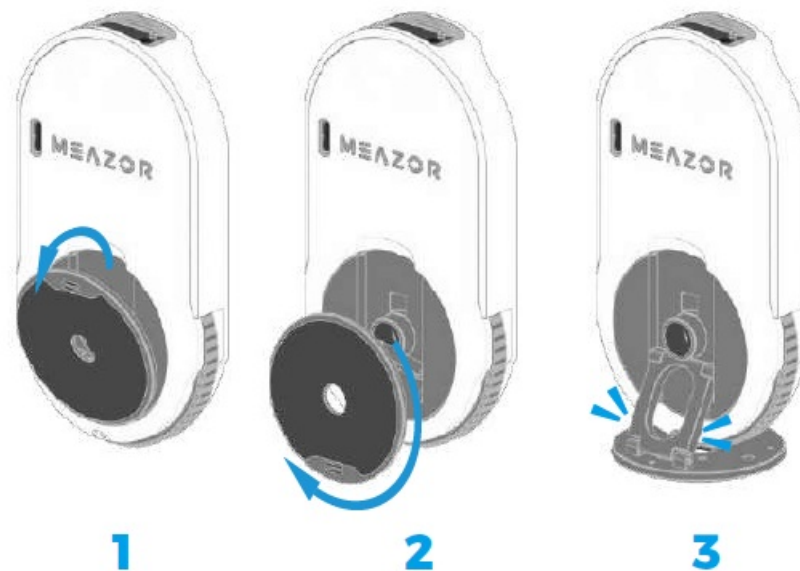


Stand – Flip the back flap. The flap is magnetically attached to the product's frame at an angle of 90°. The stand allows the user to perform vertical measuring tasks

SETUP 3D ADAPTER


- The Ultra 3D Adapter is only included in the combo edition(M0102-U). For standard model (M0102) users, the Ultra 3D Adapter in the picture needs to be purchased separately if required.
- The Master Tripod shown in the picture needs to be purchased separately if required.

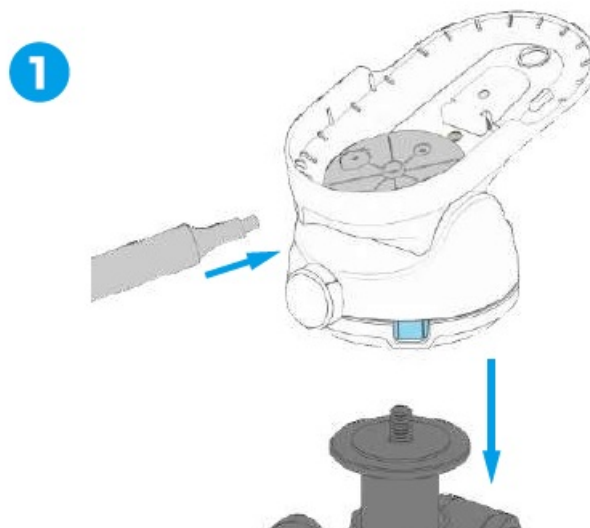


- Mounting the handle and tightening the tripod

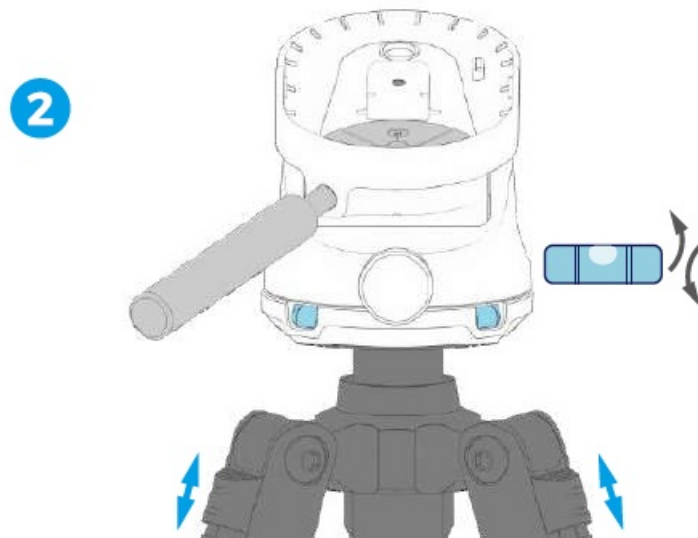

- Adjust the tripod feet until the two horizontal bubble levels are centered

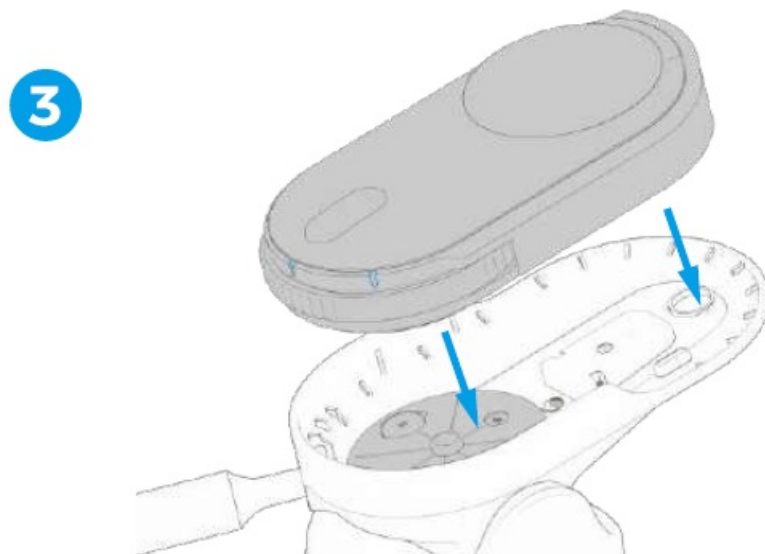

- Install MEAZOR 3D by magnetically attaching the device to the Adapter. Please make sure the device is well-connected to the Adapter and confirm the installation is in place.

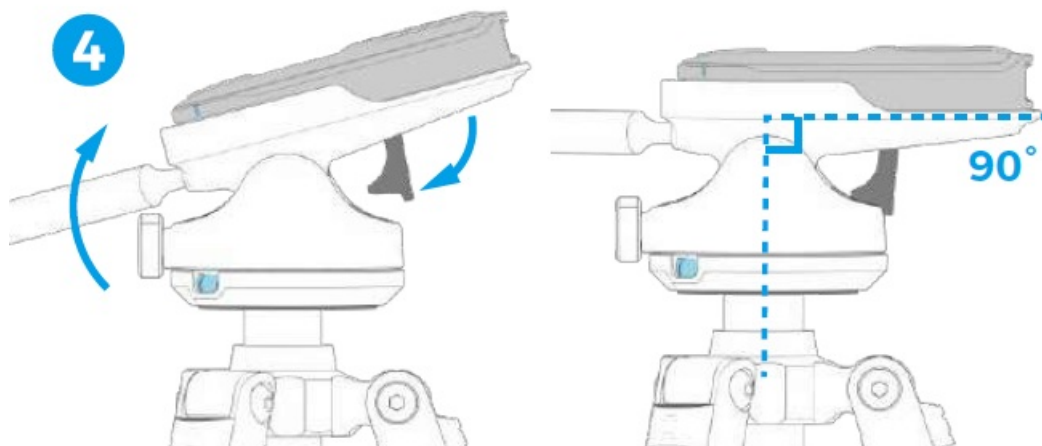


- Open the vertical stand and adjust the Adapter until it is level with the ground.

5



- Enter the point scanner/curve scanner function, wait 5 seconds for level calibration, and then tap the screen to skip the Setup Guide and to start scanning.

LASER MEASURE

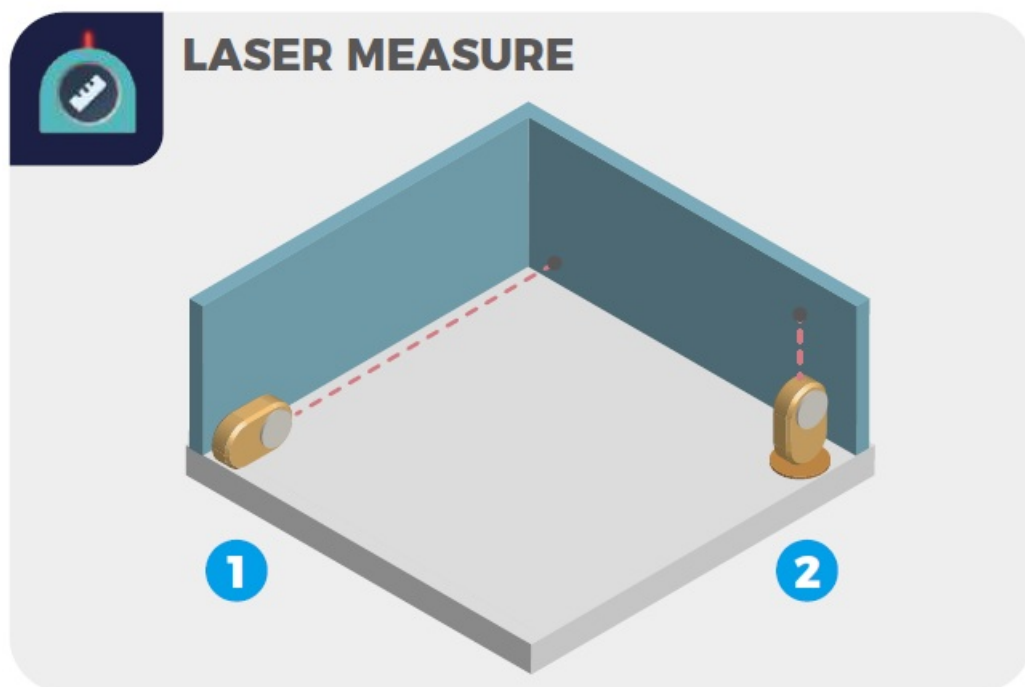

inch

100.5

Switch Units

Save Data

Switch Align Mode

Clear / send*

inch

100.50

The setting of the measurement units: set at initialization or in the setup page , the user can select between

imperial or metric units. When measuring, the user can also switch between units by tapping on the top area. Imperial units include Yard, Feet, Inch, Inch fraction. Metric units include m, cm, mm.



1. BACK ALIGN: measure along the bottom of the MEAZOR's roller as a starting point



2. STAND ALIGN: with the stand open, measure from the bottom of the stand.



3. TRIPOD ALIGN: measure from the center of the tripod hole



4. FRONT ALIGN: measure from the top of the product.




***Note:**


- If MEAZOR 3D is connected via Bluetooth to MEAZOR/3rd party App, press the middle section (measuring result) or press the Record Button. It will record and send data to the connected App. If not connected via Bluetooth, pressing the middle section will clear data.
- If MEAZOR 3D performs a measuring task offline (not connected to App), please press Save Data on the touch screen to record measuring results to the built-in data storage.


ROLLING RULER

1. MEASURE OBJECT (1:1)
2. MEASURE IN SCALES (58 scales total)

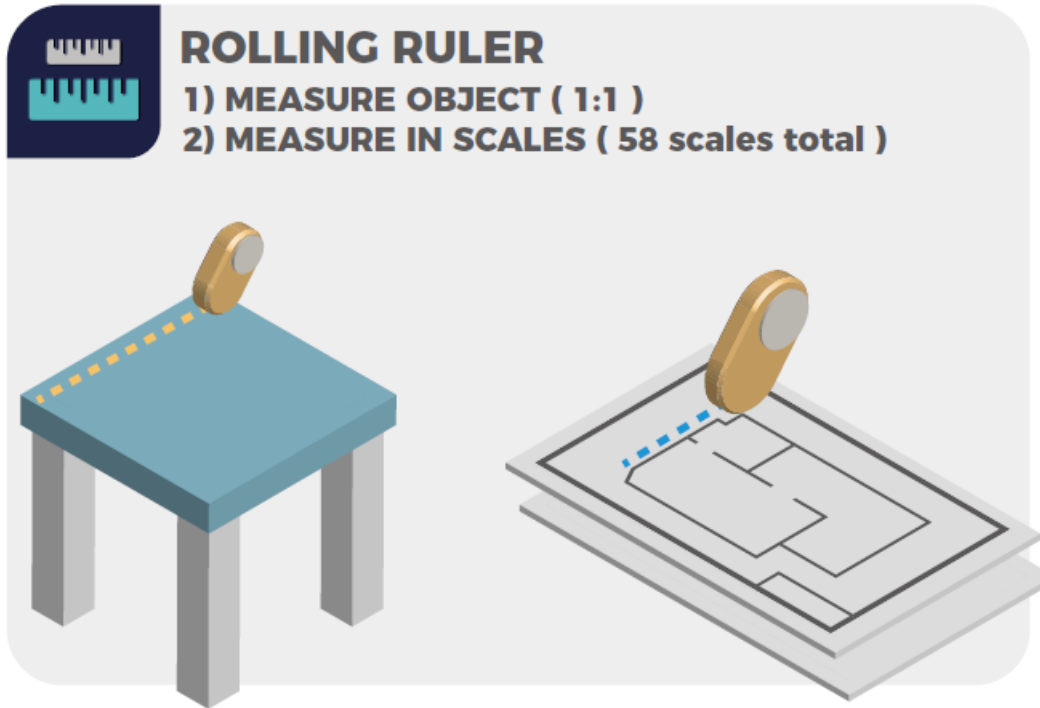

inch





1:100

100 $\frac{33}{64}$

Switch Units

Save Data

Scale Setting


Current Scale


Clear / send*

inch $\frac{1}{x}$

1:100

100 $\frac{33}{64}$






The scale mode includes four scale modes (selected in the setting menu), a total of 58 measurement scales

US-ARCH	US-ENG	METRIC-ARCH	METRIC-ENG
1/16" = 1'	1" = 1"	1:1	1:100
3/32" = 1'	1" = 10'	1:2	1:125
1/8" = 1'	1" = 20'	1:3	1:150
3/16" = 1'	1" = 30'	1:4	1:200
1/4" = 1'	1" = 40'	1:5	1:250
3/8" = 1'	1" = 50'	1:10	1:300
1/2" = 1'	1" = 60'	1:20	1:400
3/4" = 1'	1" = 70'	1:25	1:500
1" = 1'	1" = 80'	1:30	1:1000
1 1/2" = 1'	1" = 90'	1:40	1:1250
2" = 1'	1" = 100'	1:50	1:1500
3" = 1'	1" = 166.6'	1:72	1:1625
4" = 1'	1" = 200'	1:75	1:2000
6" = 1'	1" = 250'	1:100	1:2500
1' = 1'			1:5000

***Note:**

- If MEAZOR 3D is connected via Bluetooth to MEAZOR/3rd party App, press the middle section (measuring result) or press the Record Button. It will record and send data to the connected App. If not connected via Bluetooth, pressing the middle section will clear data.
- If MEAZOR 3D performs a measuring task offline (not connected to App), please press Save Data on the touch screen to record measuring results to the built-in data storage.

POINT SCANNER

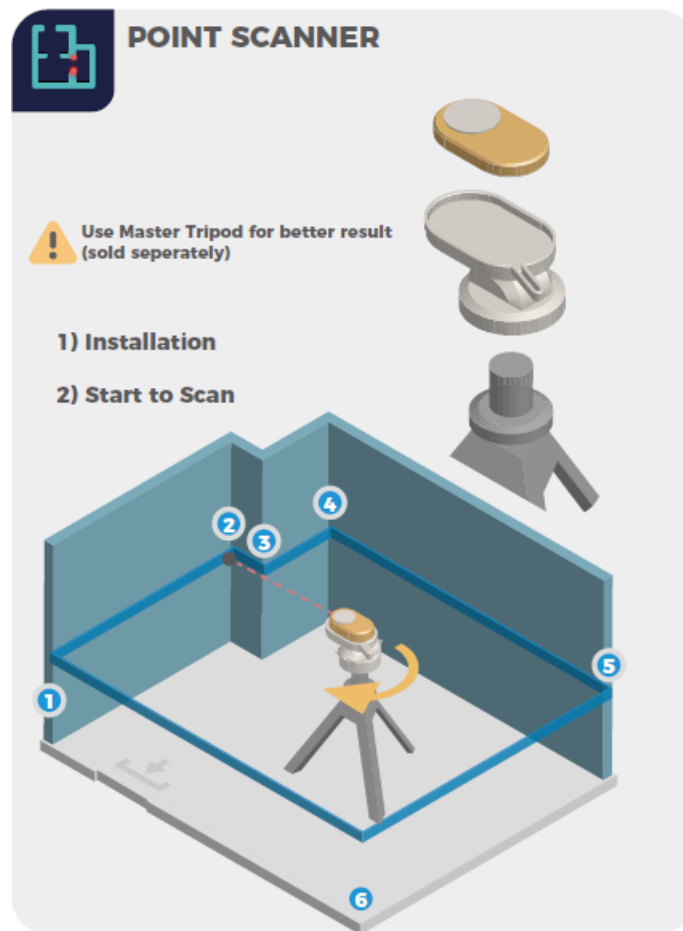

As shown in the diagram, place the MEAZOR 3D in the middle of the room. Align the laser beam with point 1 and tap on it to record the first reference point, turn and align it with point 2, record, rotate, and align it with points 3,4,5 and record each time. After completing the above steps, all the reference points of the room are captured. After tapping on save , the data will be sent to the MEAZOR APP.



Undo




Send Data




Displacement Mode



Tilt Mode

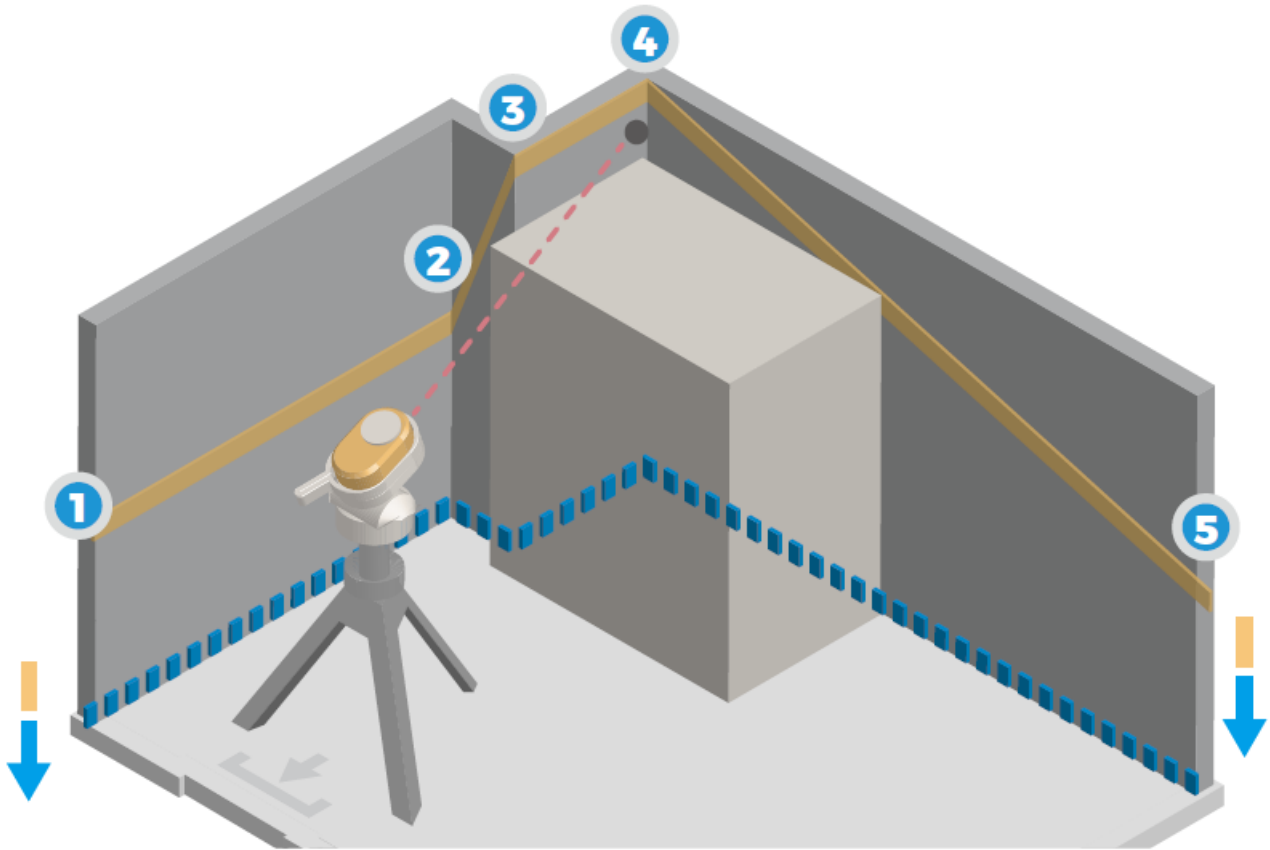

- Suppose an obstacle is placed in between the line towards a reference point. In that case, Tilt Mode is automatically switched on while vertically lifting up or down the device with the support of Ultra 3D Adapter. e.g., as shown in the diagram, the user needs to capture reference points 1-5 to avoid the obstacle at the corner and plot the complete floorplan. With Tilt Mode's algorithm, the measuring result will appear like the floorplan in the blue outlines shown above.

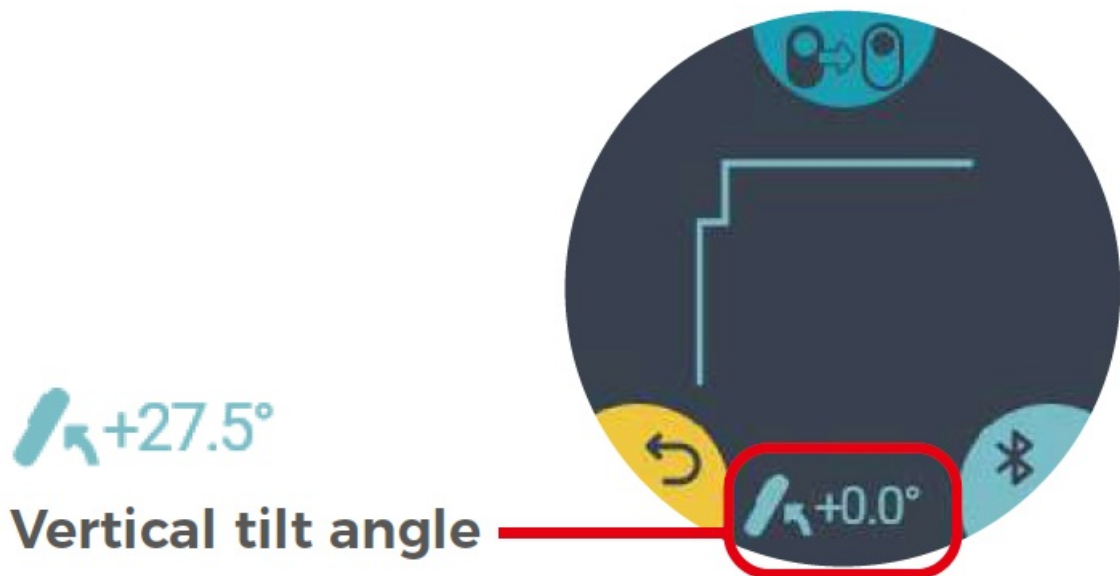


- The Ultra 3D Adapter is required to use Tilt Mode. **HOZO assumes no responsibility with regard to the measuring result accuracy if the measuring tasks involve Tilt Mode, but the user fails to use the Ultra 3D Adapter.
- HOZO assumes no responsibility with regard to the selection, performance, or use of third-party accessories.

HOZO makes no representations regarding third-party accessories' accuracy or reliability.

Displacement Mode

When you are scanning a complex room with the MEAZOR 3D , and the obstruction of the walls stops the laser beam from measuring the full extent of the room, you can turn on the Displacement Mode to measure more space by moving the MEAZOR 3D around. Please carefully read the steps for using this function.

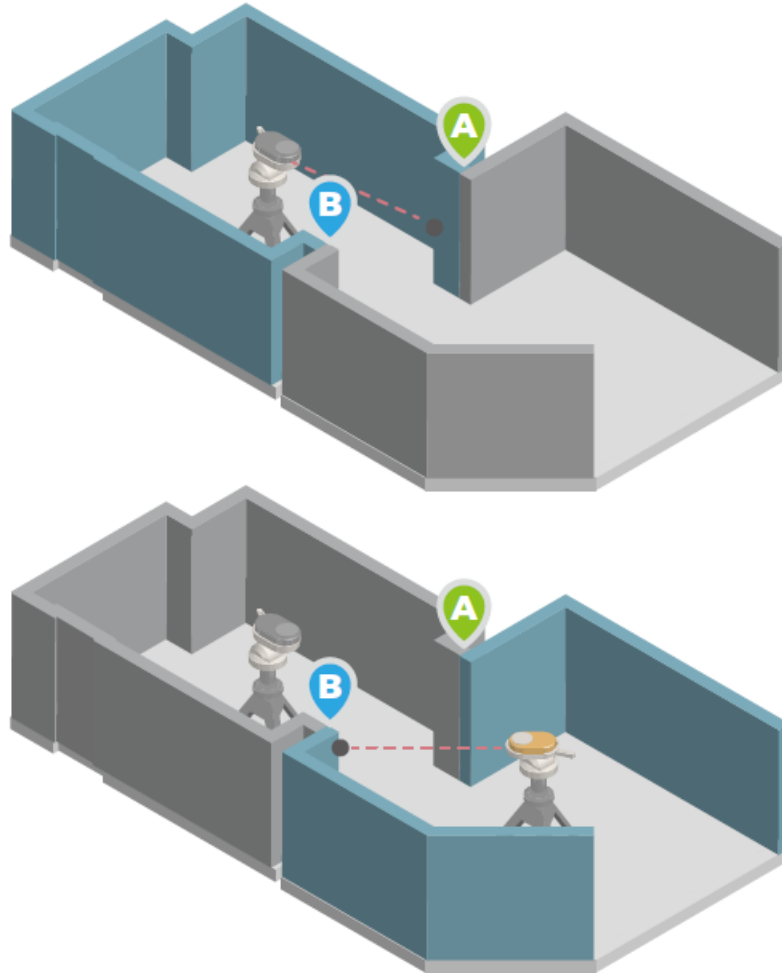


1. Before the MEAZOR 3D is displaced, identify reference point A and reference point B.
2. Move MEAZOR 3D to a new position.
3. Confirm the new position of MEAZOR by rotating the MEAZOR 3D to reposition points A and B.
4. Continue to complete the scanning.


Note: After the MEAZOR 3D has been moved, the system will continue scanning along the last endpoint of the previous measurement.

Using MEAZOR 3D Reusable Target Plates is recommended to facilitate Displacement Mode to get better results while capturing reference points.


CURVE SCANNER

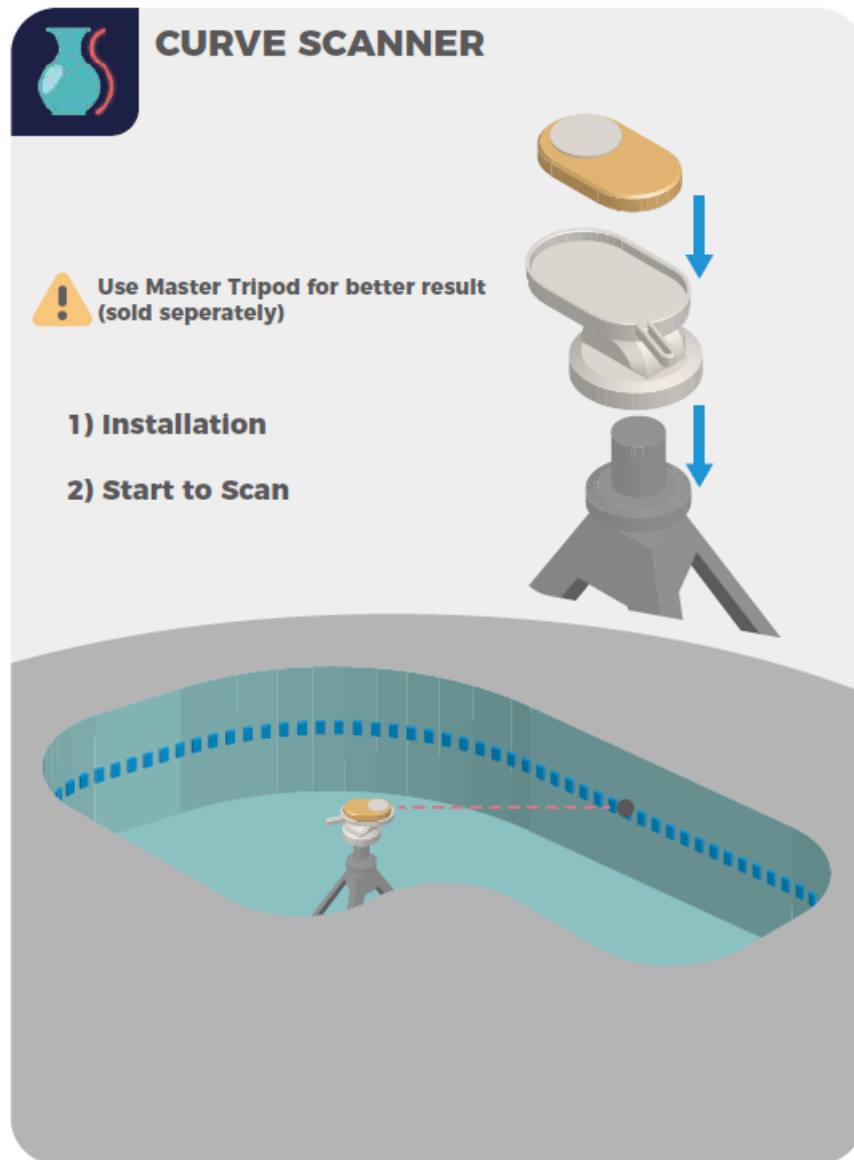

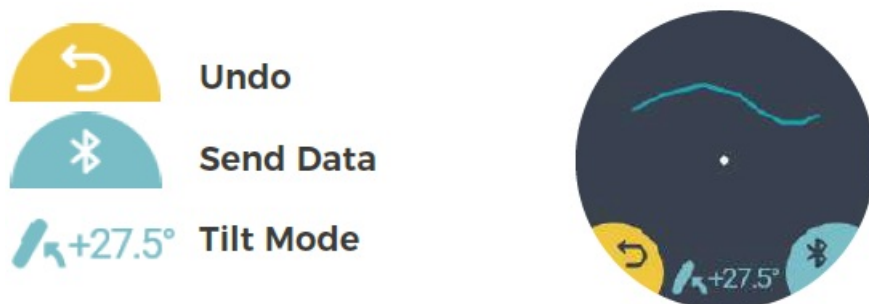

As shown in the diagram, place the MEAZOR in the middle of the room. Align the laser beam with the start-point and tap on it to record the first reference point, slowly rotating MEAZOR 3D to the end-point.

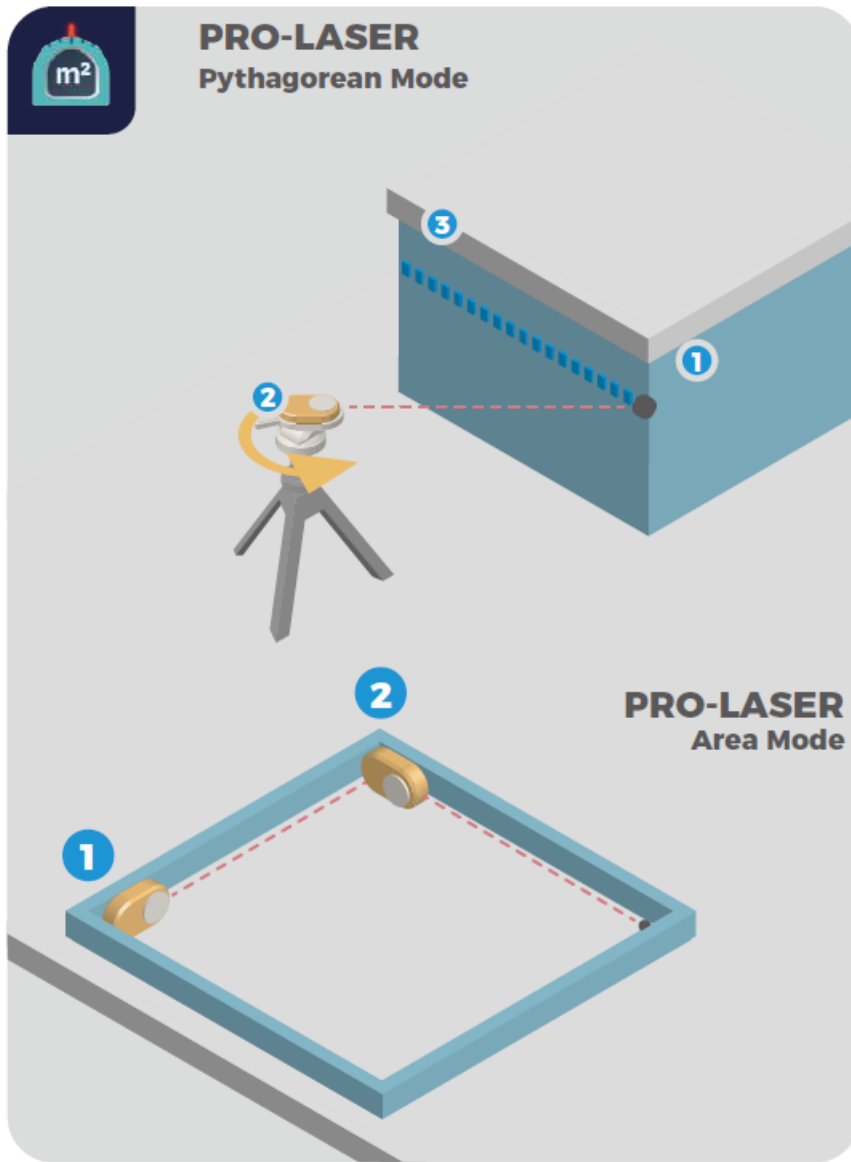

PRO-LASER
Pythagorean Mode



- 
 Pythagorean Mode (horizontal angle ONLY) – Measure side A, side B, and the angle $\angle ab$. The length of the third side is automatically calculated.
- 
 Area Mode – Measure the length A and the width B. The area is automatically calculated.



PROTRACTOR

1. Rotate wheel to measure angle
2. Laser line to improve accuracy



PROTRACTOR

- 1) Rotate wheel to measure angle
- 2) Laser line to improve accuracy

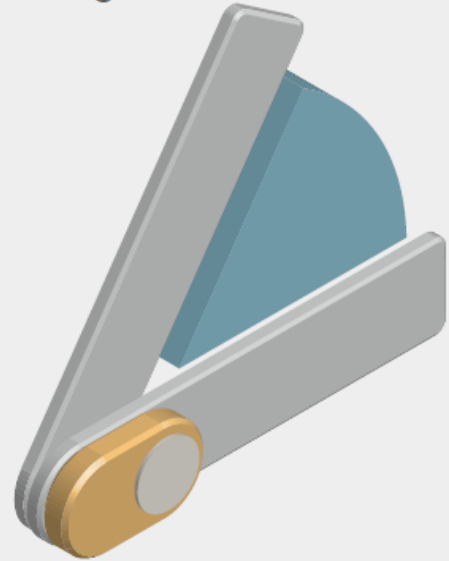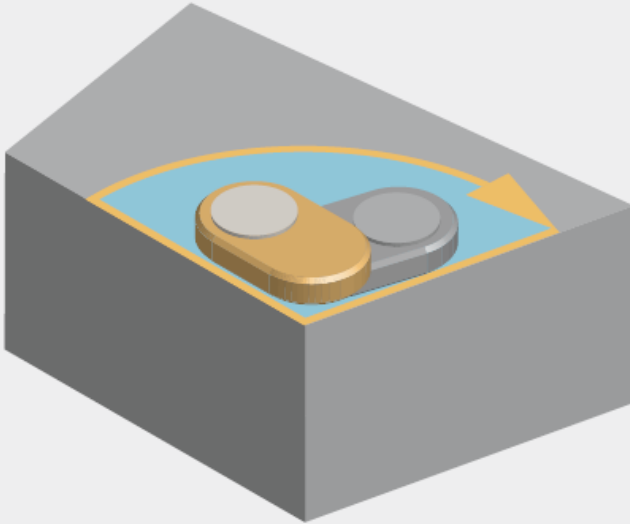

**Need protractor accessory
(sold separately)**

Place MEAZOR 3D on a flat surface, rotate MEAZOR 3D to measure the horizontal angle. While the angle is being measured, MEAZOR 3D's laser module can be used to locate the start/endpoint of the angle.

► 0.0° ◀ **Back to zero**



**Laser-assisted
positioning**




**Degree/Index
Mode**






The MEAZOR Expert Protractor Accessory (sold separately) can also be used for more accurate angle measurement.

LEVEL

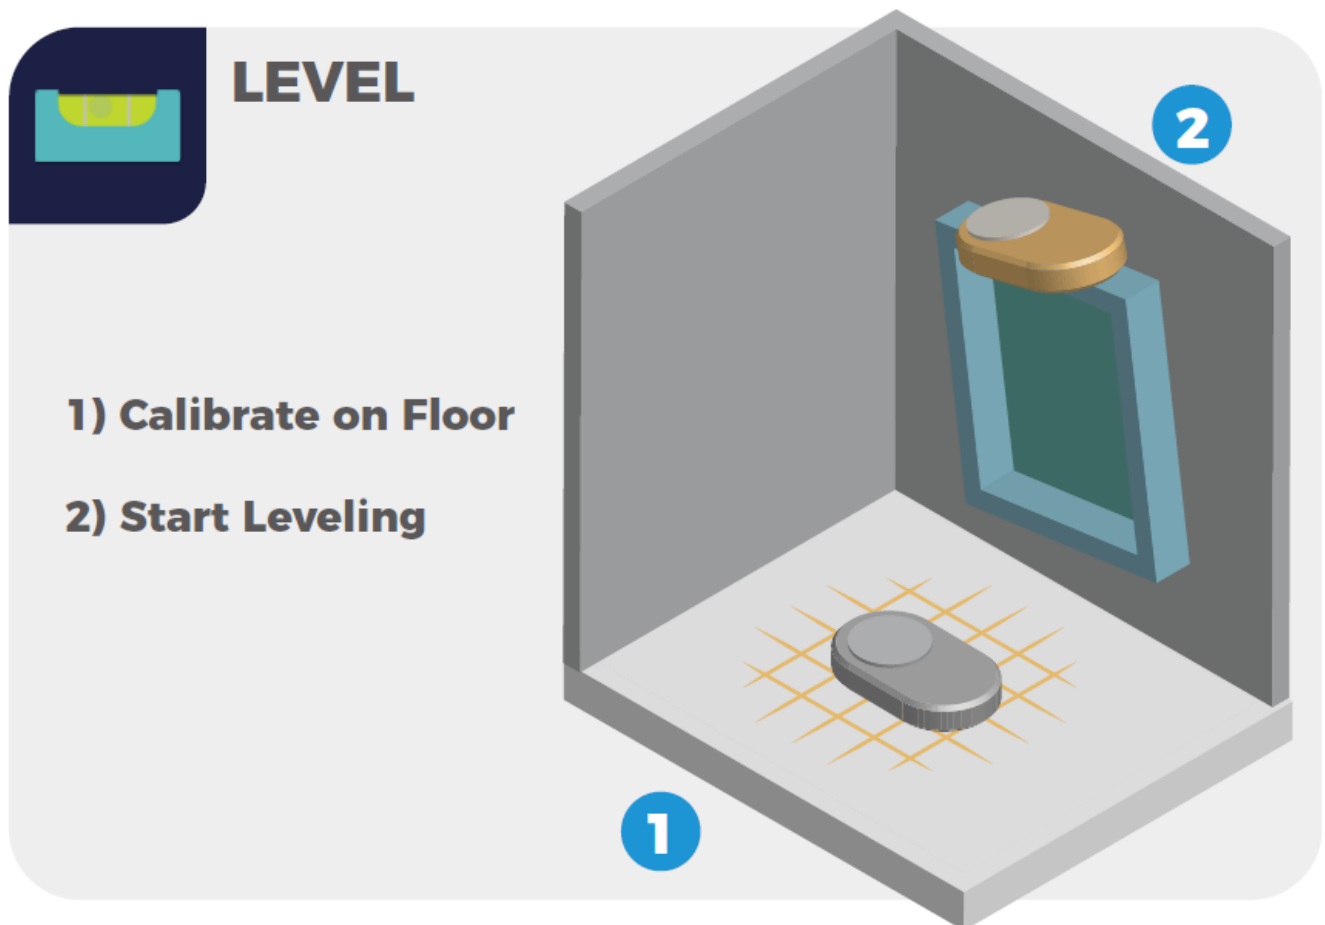


Place MEAZOR 3D on a flat surface to use the electronic level function of MEAZOR 3D. When the level is close to 0° ($< \pm 1^\circ$), the light point turns blue.

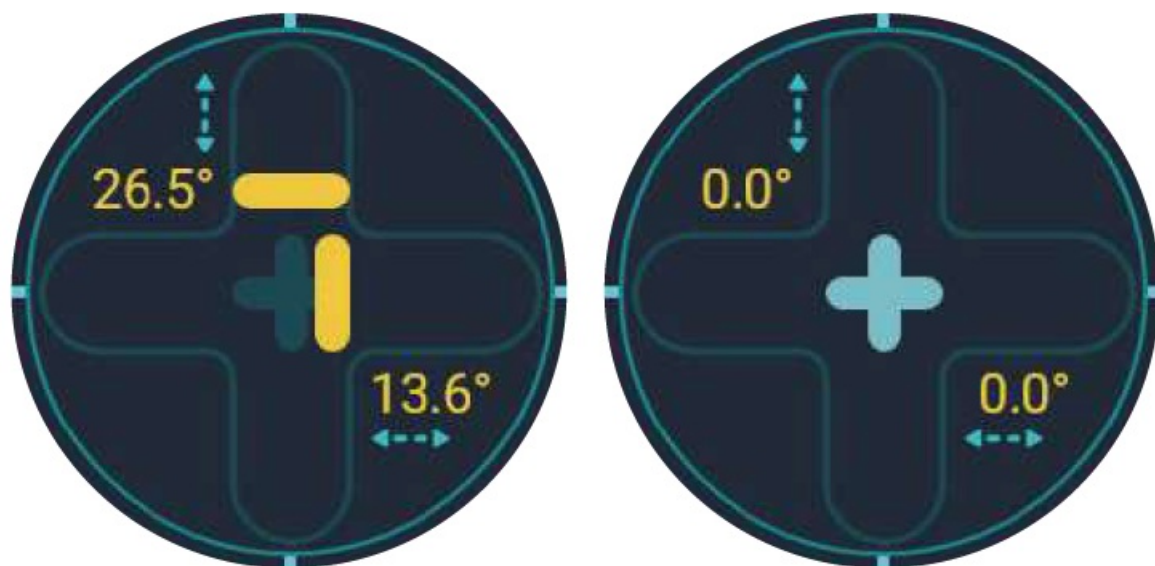

Horizontal axis: Tumble angle / **Vertical axis:** Tilt angle




MEAZOR APP

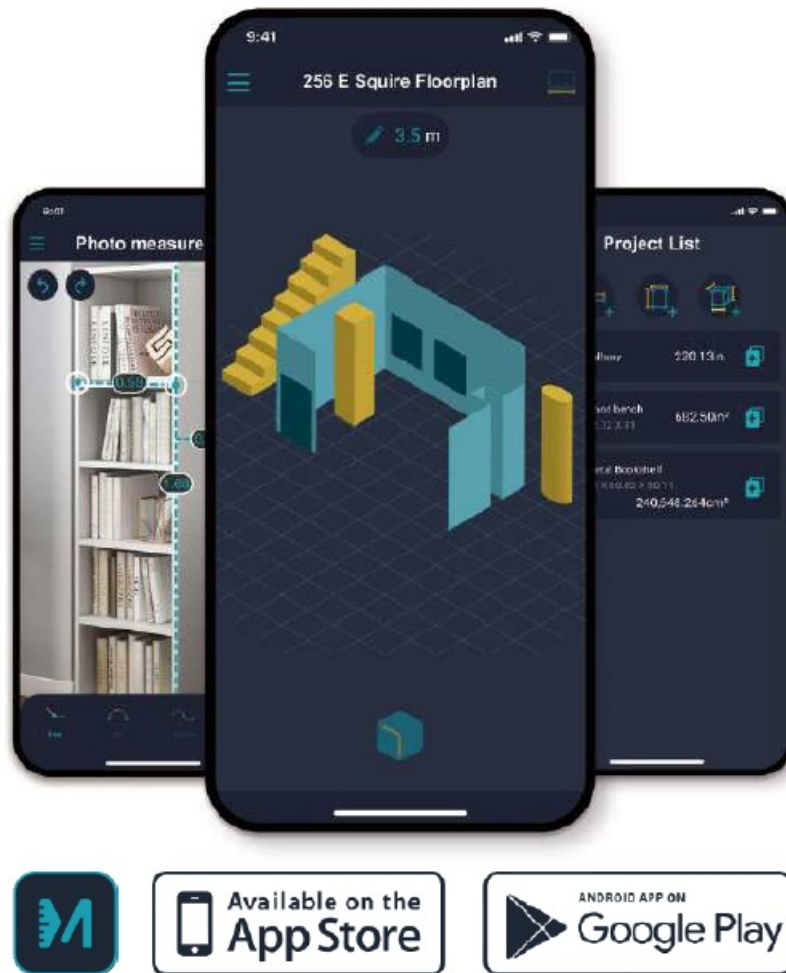

Connect to MEAZOR APP

- MEAZOR APP is a free app and can be connected to MEAZOR series products. Receive surveying data and edit it. After entering the MEAZOR APP, create a new project. And click the Bluetooth icon in the upper right corner to connect to MEAZOR 3D.
 - The above product specifications are subject to change without notice. All rights of interpretation are reserved by HOZO DESIGN CO., Limited.
 - All trademarks, images, technical data, and intellectual property rights are the properties of HOZO DESIGN CO., Limited and are subject to copyright infringement.
-

Documents / Resources

<div data-bbox="129 91 285 306"><p>MEAZOR 3D Future Laser Measure</p><p>USER MANUAL Model: M0102-U / M0102</p></div> <p>The MEAZOR 3D is a portable and multifunctional measuring device. It is composed of a 120 ft (36.9 m) laser distance module and a 4096-grade angle sensor module with high accuracy, which empowers its ability to measure straight lines, curves, and composed shapes floorplans. MEAZOR 3D is equipped with a plotting app for Android and iOS, allowing data collection, floor plan drawing, 3D display, document moving, and sharing.</p> <p>-The standard edition (Model M0102) can complete the above essential functions.</p> <p>-The premium combi (M0102-U) is equipped with the Ultra 3D Adapter and can be capable of obstacle avoidance and achieve higher precision.</p>	<h2>MEAZOR 3D M0102-U Multifunctional Laser Measure [pdf] User Manual</h2> <p>M0102-U Multifunctional Laser Measure, M0102-U, Multifunctional Laser Measure, Laser Measure, Measure</p>
--	---