

# AUTOMATE™

## 4 Channel Motor Controller

A competitive multi motor controller for hard wired commercial applications.



### 4 MOTOR CONTROL UNIT

Works with our entry level mechanical limit or AC motors.




### SCALE ABILITY

While each controller controls up to 4 motor control units, daisy chain up to 32 devices to control up to 128 motors.



### 4 DEFAULT POSITIONS

Shade can be moved to any of the default position settings; 20, 40, 60 & 80% quickly and easily.



### EXTENSIVE INTEGRATIONS

Integrates directly to fire alarms, security alarms, light & occupancy sensors, and any other dry contact output sensors.



### CONNECT TO TCP/IP NETWORKS

Connects directly to existing wired systems, eliminating the need to re-wire the entire building for integration.



### COST EFFECTIVE

A low cost solution which offers more features compared to its counterparts.




**7** YEAR  
WARRANTY

## PRODUCT SPECIFICATIONS


Part #: MT02-0401-331011 AUTOMATE | 4 Motor Controller 85-240VAC Input

<b>Input Voltage</b>	120V (US) / 230V (EU) / 240V (AU) AC	<b>Operating temperature range</b>	32°F - 122°F   [0°C - 50°C]
<b>Max Current</b>	1.25A Each Channel	<b>Operating humidity conditions</b>	20% - 60%
<b>Power Factor</b>	0.47	<b>Storage temperature range</b>	-4°F - 158°F   [-20°C - 70°C]
<b>No load power loss</b>	1.65W	<b>Storage humidity conditions</b>	< 80%
<b>Efficiency with 100% load @ 110V</b>	68%	<b>Fuses</b>	2x 250V, 5A
<b>Efficiency with 100% load @ 240V</b>	68%		

## DIMENSIONS

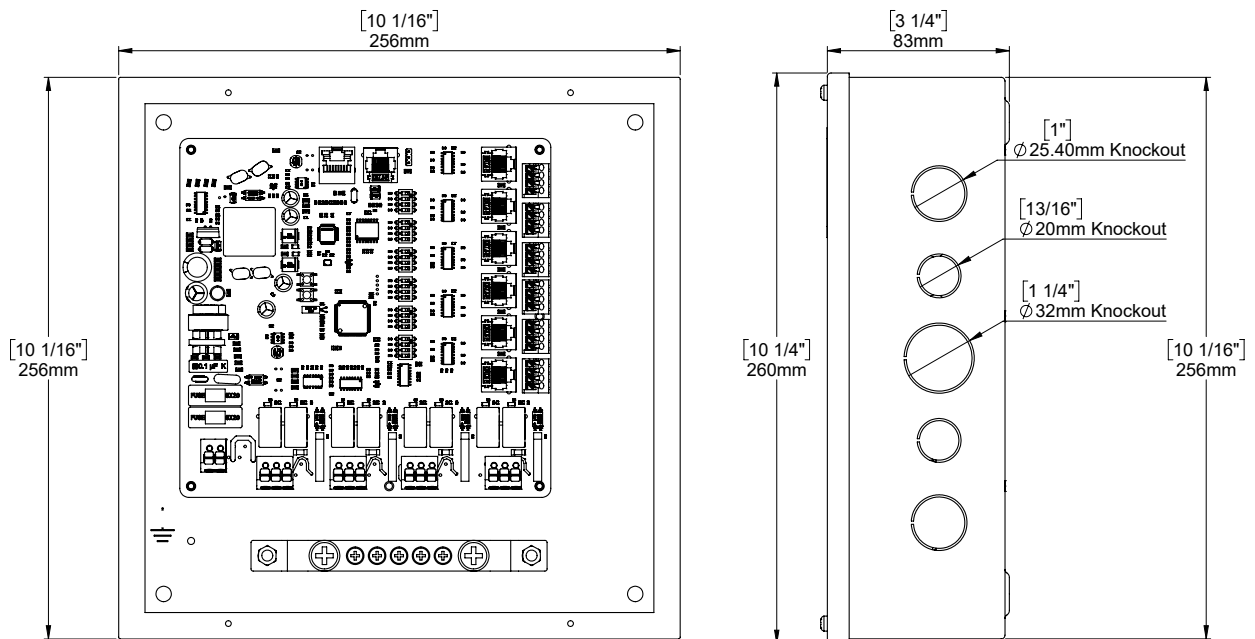

## SCHEMATIC

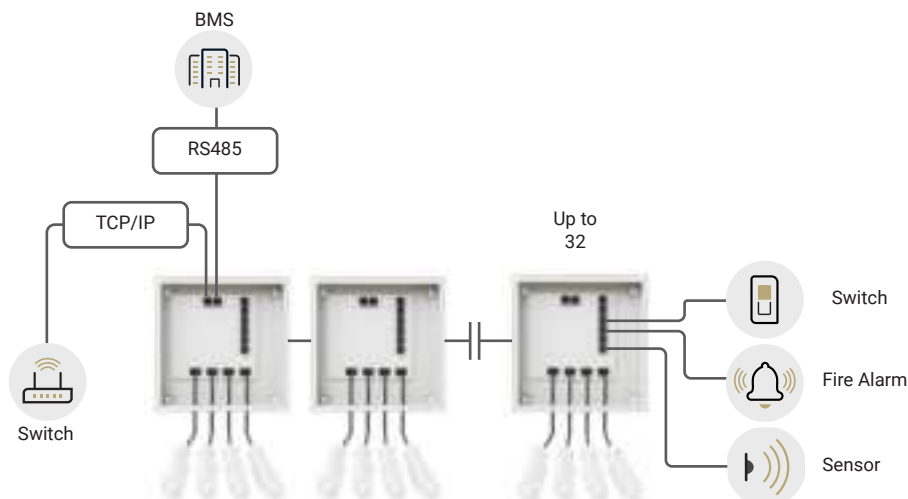

## ITEMS INCLUDED

