



MiBOXER 5 In 1 LED Controller Instruction Manual

[Home](#) » [MiBOXER](#) » **MiBOXER 5 In 1 LED Controller Instruction Manual** 

Contents

- [1 MiBOXER 5 In 1 LED Controller](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Product features](#)
- [5 Set up output mode](#)
- [6 Compatible with these 2.4G RF remote controls \(Purchased separately\)](#)
- [7 2.4G RF Remote control instruction](#)
- [8 Unlinking Code Instructions](#)
- [9 Auto transmitting & Synchronization \(only for remote control\)](#)
- [10 Dynamic mode table selection \(only for remote control\)](#)
- [11 PWM high frequency / low frequency switching \(only for remote control\)](#)
- [12 2.4G RF Remote turn on and turn off instruction](#)
- [13 DMX512 LED Transmitter Control \(Purchased separately\)](#)
- [14 DMX512 LED Transmitter Link/Unlink](#)
- [15 Documents / Resources](#)
 - [15.1 References](#)
- [16 Related Posts](#)



MiBOXER 5 In 1 LED Controller



Product Information

Specifications

- 5 in 1 LED Controller (2.4G)
- 16 Million colors to choose from
- Color temperature adjustable
- Dim brightness / Saturation
- 2.4G RF wireless transmission technology
- Remote control distance of 30m
- Supports auto-transmitting & synchronization
- Supports Smartphone app control (2.4GHz gateway is needed)
- Supports third-party voice control (2.4GHz gateway is needed)
- DMX512 controllable (Only for RGB+CCT output mode, DMX512 LED transmitter is needed)

Product Usage Instructions

Set up Output Mode

To set up the correct output mode based on the feature of lights:

1. Press the SET button continuously to switch output modes.
2. Refer to the Output Mode sheet and confirm the output mode based on the color of the indicator.

Compatible with Remote Controls

The 5 in 1 LED Controller is compatible with the following 2.4G RF remote controls (Purchased separately):

- FUT100
- FUT089S, FUT089, FUT088, FUT092, FUT096

2.4G RF Remote Control Instructions

FAQ

- **Q: What should I do if the linking process fails with the remote control?**

A: If the lights do not blink slowly after pressing the link/unlink button for 3 times within 3 seconds, please repeat the linking process.

Product features

Made by new 2.4GHz wireless transmitting technology with low power consumption, strong ability to build network automatically and anti-interference. with MiBoxer 2.4GHz gateway to get wireless dimming color, remote control, timing control, group control, music rhythm function. Support 2.4G RF remote control.



16 Millions of colors to choose



Color temperature adjustable



Dim brightness / Saturation



2.4G RF wireless transmission technology



Remote control distance 30m



Auto-transmitting & Synchronization



Support Smartphone app control (2.4GHz gateway is needed)



Support third party voice control (2.4GHz gateway is needed)



DMX512 controllable
(Only for RGB+CCT output mode DMX512 LED transmitter is needed)

Set up output mode

Set up correct output mode based on the feature of lights

Setting method: Press “SET” button continuously to switch output mode (attention: it will log out without operation within 3 seconds)


Output mode sheet (confirm output mode based on color of indicator)

Indicator color	White Light	Yellow Light	Red Light	Green Light	Blue Light
Output	Single Color	Dual White	RGB	RGBW	RGB+CCT


Compatible with these 2.4G RF remote controls (Purchased separately)



FUT100

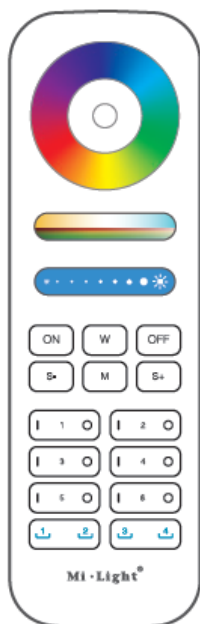


FUT089S

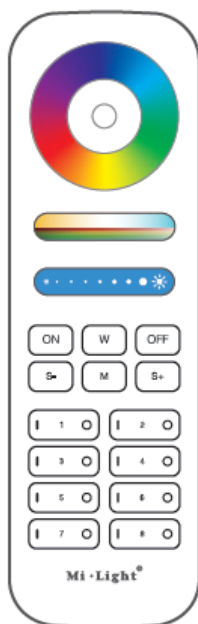

FUT089
FUT089-B



FUT088

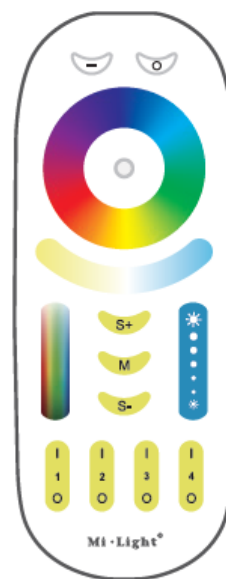


FUT092
FUT092-B




FUT096
FUT096-B




B8

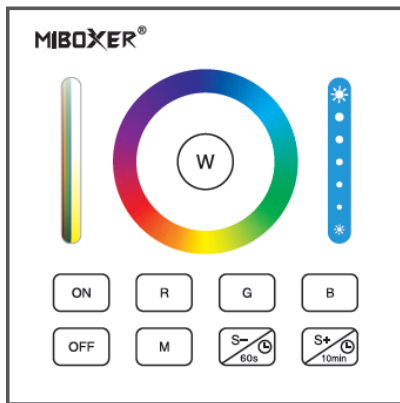

B0 / B0-B

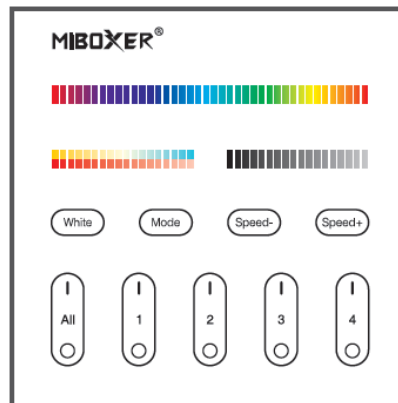


B4 / B4-B / T4

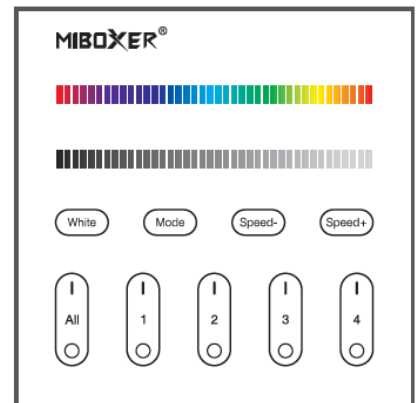

B3 / B3-B / T3



S2-B / S2-W
S2-G

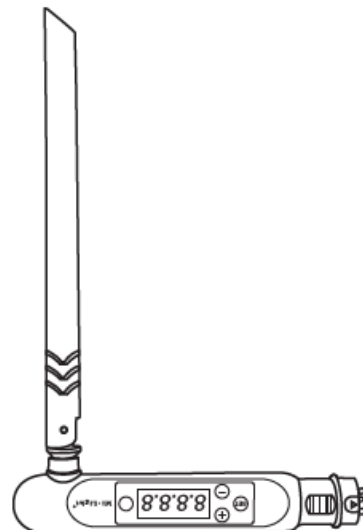

FUTD01

2.4G RF Remote control instruction

Linking Code Instructions



1. Power off 10 seconds and power on again or short press "SET" one time.
2. Short press "1" button 3 times within 3 seconds.
3. Lights blink 3 times slowly means linking is done successfully.



Linking failed if light is not blinking slowly, Please follow above steps again.
(Note: Light that have linked can't link again)

Unlinking Code Instructions



1. Power off 10 seconds and power on again or short press "SET" one time.
2. Short press "1" button 5 times within 3 seconds.
3. Lights blink 10 times quickly means unlinking is done successfully.



Unlinking failed if light is not blinking quickly, Please follow above steps again.
(Note: Light haven't linked that don't need to unlink)

Auto transmitting & Synchronization (only for remote control)


Remote signal auto transmitting

One light can transmit the signals from the remote control to another light within 30m, as long as there is a light

within 30m, the remote control distance can be limitless.

Dynamic modes auto synchronization

Multi lights can synchronize if they are in same dynamic mode and linked with same remote (distance between each light is within 30m)

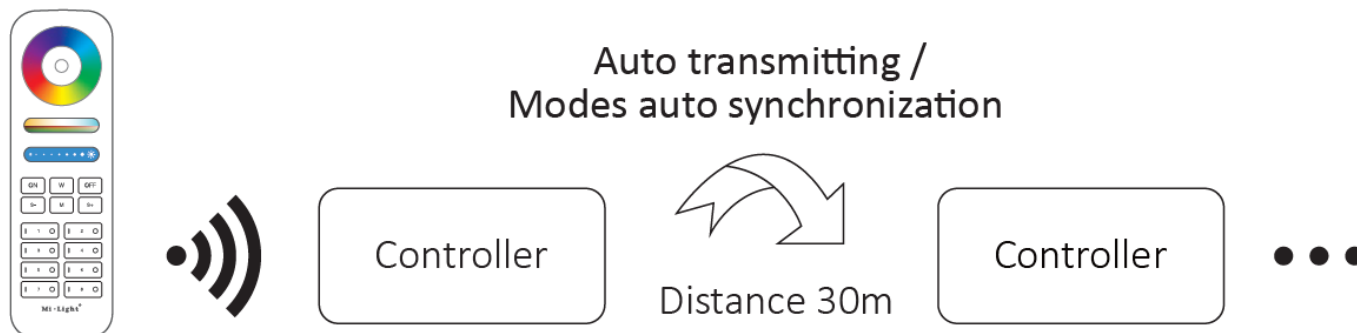

Dynamic mode table selection (only for remote control)

Select dynamic mode table 1:

While the light is in static mode, short press " S+ " button 5 times quickly until blue light flashes 3 times slowly, static mode is activated successfully.

Select dynamic mode table 2:

While the light is in static mode, short press " S- " button 5 times quickly until yellow light flashes 3 times slowly, static mode is activated successfully.

Dynamic mode table 1 (default)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

Dynamic mode table 2 (need to switch manually)

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Seven colors gradual change	Adjustable
2	White light Gradual change	
3	RGB gradual change	
4	Seven colors jump to change	
5	Jump to change randomly	
6	Red light gradual change +Flash 3 times	
7	Green light gradual change +Flash 3 times	
8	Blue light gradual change +Flash 3 times	
9	White light gradual change +Flash 3 times	

PWM high frequency / low frequency switching (only for remote control)

Switch to high frequency:

Press "OFF" button 1 time within three seconds and press "ON" button 5 times, Activated successfully once led light flashes 2 times quickly.

Switch to low frequency:

Press "ON" button 1 time within three seconds and press "OFF" button 5 times, Activated successfully once led light flashes 2 times slowly.

"Do Not Disturb" mode is activated and shut down (default activated)

Turn on "Do Not Disturb" mode (wide using in the area which have power failure frequently to save energy)

2.4G RF Remote turn on and turn off instruction

Turn on "Do Not Disturb" mode:

Press "OFF" button three times within three seconds and press "ON" button three times, Activated successfully once led light flashes four times quickly.

Attention: Do not disturb mode is activated

1. When the light is OFF status (For example: Use app or remote to turn off light) The light is OFF status once you turn off power and turn on again.

(User must turn off and turn on power twice times to activate light or use APP / remote to activate light)

2. When the light is ON status

The light is ON status once you turn off and turn on power one time.


Turn off "Do Not Disturb" mode:

Press "ON" button three times within three seconds and press "OFF" button three times, closed successfully once led light flashes four times slowly.

Attention: The light will be always "ON" status if you turn on and turn off power once user closed "Do Not Disturb" mode.


DMX512 LED Transmitter Control (Purchased separately)

Only for RGB+CCT output mode

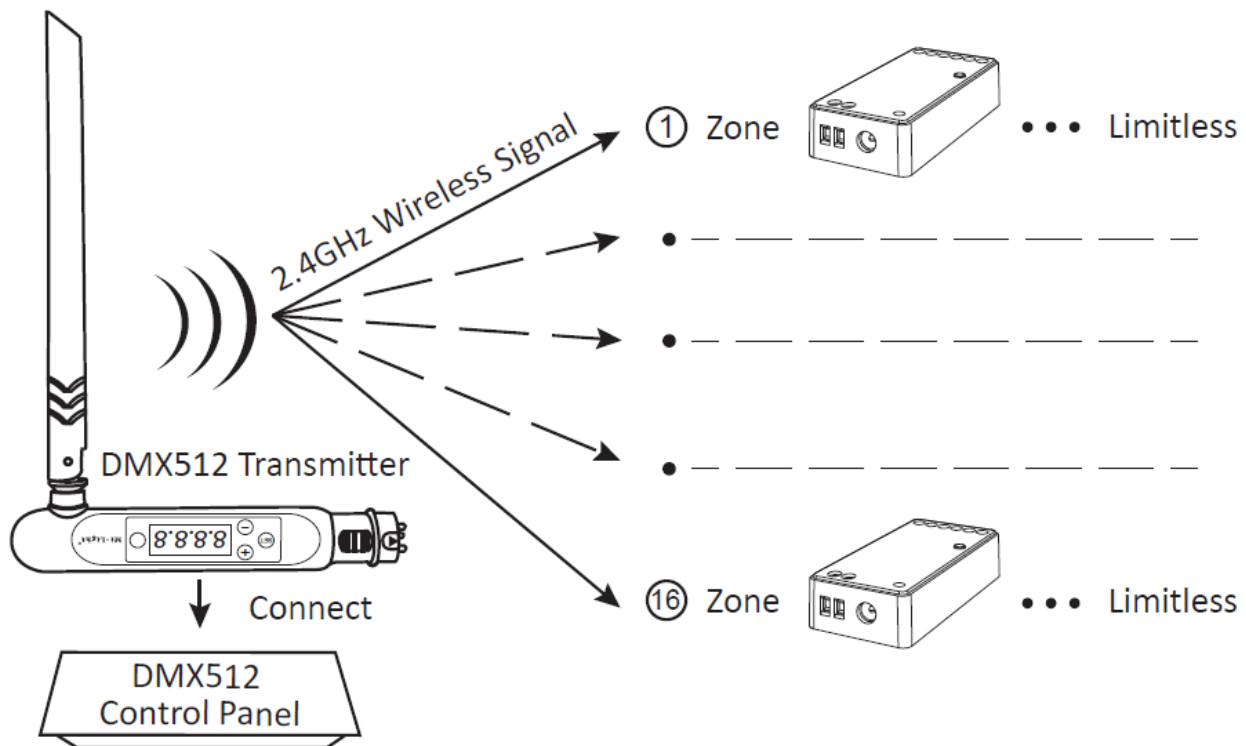

DMX512 LED Transmitter Link/Unlink

1. Follow instruction of DMX512 transmitter (FUTD01), Choose the zone for the light by pressing “+” or “-” (e.g. “CH12” means zone 12)

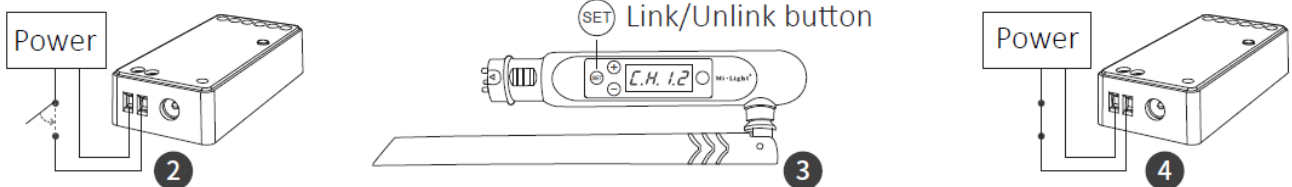

Link

2. The controller is powered off for 10 seconds and then powered on, or press “SET” button 1 time.
3. Short press “&” 3 times within 3 seconds while the indicator of controller is ON
4. Link is done once indicator of controller flashes 3 times slowly

Unlink

- The controller is powered off for 10 seconds and then powered on, or press “SET” button 1 time.
- Short pr SETess “set” 5 times within 3 seconds while the indicator of controller is ON
- Unlink is done once indicator of controller flashes 10 times quickly



If the link or unlink failed, please follow the above steps again.

Attention

1. Please turn off power supply before installation.
2. Please ensure input voltage to be same as requirements from device.
3. Don't disassemble device if you are not expert, otherwise it will damage it.
4. Please do not use the light in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.




Scan QR code to watch 2.4GHz series video instruction Or enter into following link directly

https://miboxer.com/light/video/1pc_remote.html

Made in China

Documents / Resources

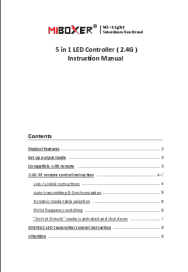	<p>MiBOXER 5 In 1 LED Controller [pdf] Instruction Manual</p> <p>5 In 1 LED Controller, LED Controller, Controller</p>
---	--

References

-  [Remote Series Video - MiBoxer](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.