



# MiBOXER C1 4 Zone Color Temperature Remote Instruction Manual

[Home](#) » [MiBOXER](#) » MiBOXER C1 4 Zone Color Temperature Remote Instruction Manual 

## Contents

- [1 MiBOXER C1 4 Zone Color Temperature Remote](#)
- [2 Product Information](#)
- [3 Product Features](#)
- [4 Product parameters](#)
- [5 Button Description](#)
- [6 Linking/Unlinking](#)
- [7 Installation Notes](#)
- [8 Attention](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)
- [10 Related Posts](#)



**MiBOXER C1 4 Zone Color Temperature Remote**



## Product Information

### Specifications

- Model No.: C1
- Working Voltage: 3V (AAA \* 2PCS)
- Transmitting Power: 6dBm
- Standby Power Consumption: 5A

### Product Features

The Subordinate New Brand 4-Zone Color Temperature Remote (2.4GHz), Model No.: C1, adopts 2.4GHz frequency with low power consumption, long-distance transmitting, strong anti-interference, and fast communication rate. With a simple press of a button on the remote control, you can enjoy the comfortable lighting

effect. It is mini and easy to use, and the magnetic installation is very firm. This remote can control designated Mi-Light / MiBoxer 2.4G lamps, allowing you to adjust the color temperature and brightness of the light.

## Button Description

- **S1 button:**
  - Short press: activate the scene
  - Long press 3 seconds: save color temperature or brightness (the light flashes one time slowly once completed successfully)
- Master ON: Warmer white
- Brightness-: Decrease brightness
- Zone ON (Link / Unlink)
- Master OFF: Cooler white
- Scene Brightness+: Increase brightness
- Zone OFF

## Linking Instruction

1. Power supply the light.
2. Turn off the light after 10 seconds.
3. Press the “Link / Unlink” button on the remote control.
4. Short press the “I” button 3 times within 3 seconds when the light is on.
5. The light will flash 3 times slowly, indicating successful linking.

**Note:** If the light is not blinking slowly, please repeat the above steps. Once a light is linked, it cannot be linked again.

## Unlinking Instruction

1. Power supply the light.
2. Turn off the light after 10 seconds.
3. Press the “Link / Unlink” button on the remote control.
4. Short press the “I” button 5 times within 3 seconds when the light is on.
5. The light will flash 10 times slowly, indicating successful unlinking.

**Note:** If the light is not blinking quickly, please repeat the above steps. Lights that have not been linked do not need to be unlinked.

## Installation Notes

1. Take off the double-sided tape on the back of the base.
2. Stick the base well, and the remote control will be magnetically attracted to the base.

## Attention

1. This remote control only controls specified Mi-Light / Miboxer products. Please refer to the manual for details.

2. This remote control is a precision electronic product. Please do not use it in a humid or high-temperature environment for a long time. When not in use for a long time, please take out the battery and store it in a dry, static-free environment.
3. Do not use the remote control in a large area of metal or an environment with strong electromagnetic waves nearby, as it may seriously affect the control distance.

## **FAQ**

### **Q: What products can this remote control?**

- **A:** This remote control only controls specified Mi-Light / Miboxer products. Please refer to the manual for details.

### **Q: Can I use the remote control in a humid or high-temperature environment?**

- **A:** No, please do not use the remote control in a humid or high-temperature environment for a long time. When not in use, it is recommended to take out the battery and store it in a dry, static-free environment.

### **Q: Can I use the remote control in an environment with strong electromagnetic waves nearby?**

- **A:** It is not recommended to use the remote control in an environment with strong electromagnetic waves nearby, as it may seriously affect the control distance.

### **Q: How do I link/unlink the remote control with lights?**


- **A:** Please refer to the "Linking/Unlinking Instructions" section in the user manual for detailed instructions on how to link and unlink the remote control with lights.

## **Product Features**

- Adopts 2.4GHz frequency with low power consumption distance transmitting, strong anti-interference, and fast communication rate, Simply press the button on the remote control, and You can enjoy the comfortable lighting effect. Mini easy to use, Magnetic installation is very firm. Can control designated Mi-Light / MiBoxer 2.4G lamps, The color temperature and brightness of the light can be adjusted.

## **Product parameters**


- **Model No.:** C1
- **Working Voltage:** 3V (AAA \* 2PCS)
- **Transmitting Power:** 6dBm
- **Standby Power Consumption:** 5μA
- **RF:** 2.4GHz
- **Working Temperature:** -10~40°C
- **Control Distance:** 30m

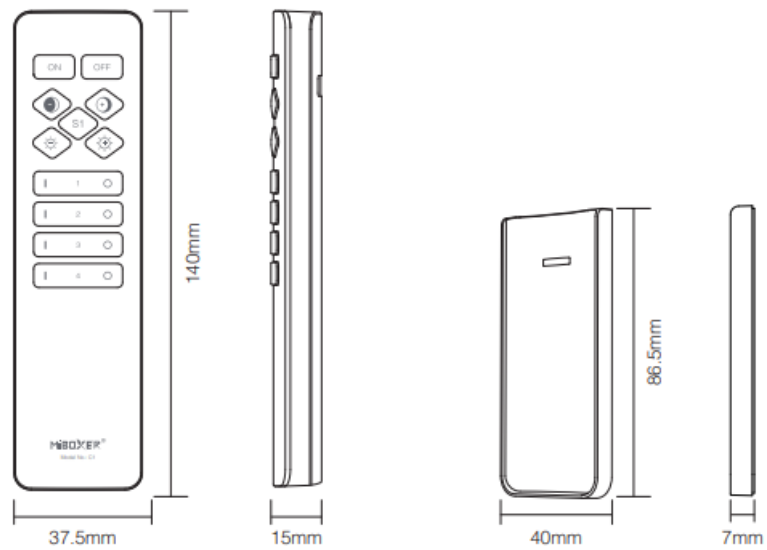

## Button Description

### S1 button


- **Short press:** activate scene
- **Long press 3 seconds:** save color temperature or Brightness
  - ( the light flashes one time slowly once completed successfully).

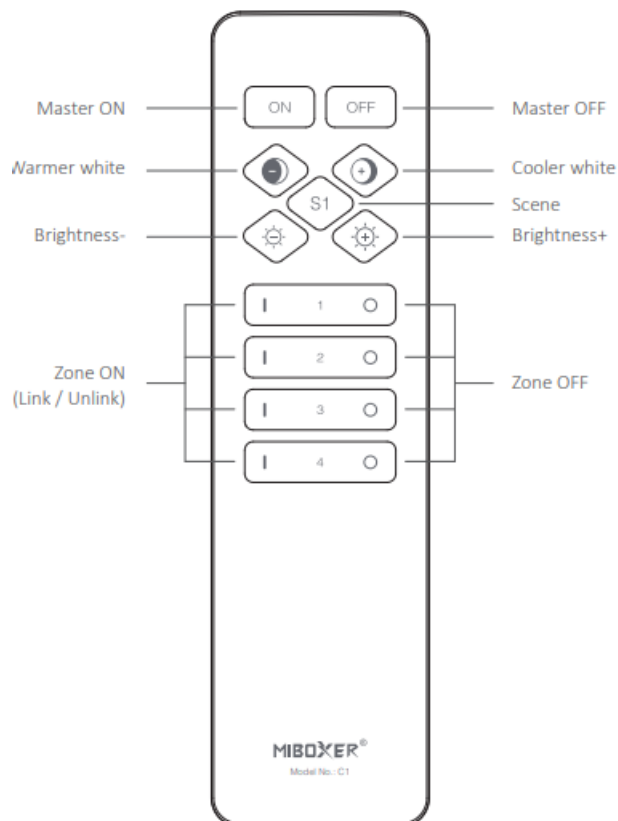

## Linking/Unlinking

**Note:** The remote needs to link with the lights before the control light.


### Linking instruction

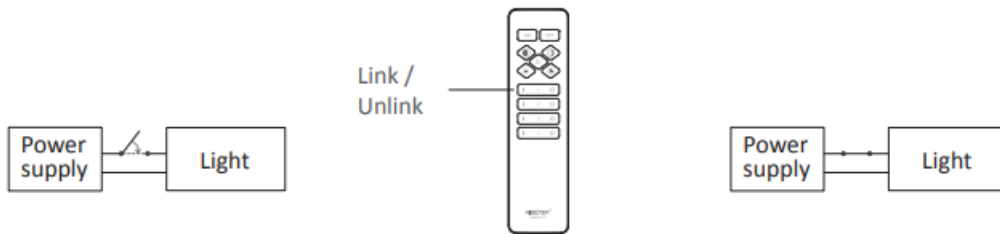

1. Turn off the light after 10 seconds turn off
2. Short press "I" 3 times within 3 seconds when the light on
3. Light flashing 3 times slowly means it is successfully

- Linking fails if the light is not blinking slowly, Please follow the above steps again.
- **(Note:** Light that has linked can't link again)

### Unlinking instruction

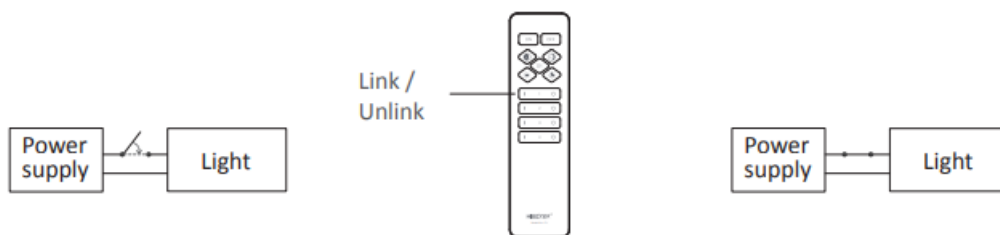


1. Turn off the light after 10 seconds turn on
2. Short press "I" 5 times within 3 seconds when the light on
3. Light flashing 10 times slowly means it is successfully

- Unlinking fails if the light is not blinking quickly, Please follow the above steps again.
- **(Note:** Light hasn't linked that doesn't need to unlink)

### Installation Notes

1. Take off the double-sided tape on the back of the base
2. Stick the base well, and the remote control is magnetically attracted to the base

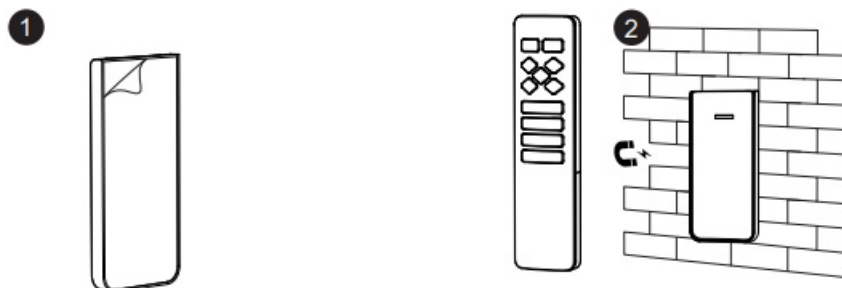


### Attention

1. This remote-only control specified Mi-Light / Miboxer products; for details please check the manual.
2. This remote control is a precision electronic product, please do not use it in a humid or high-temperature environment for a long time. When not in use for a long time, please take out the battery and store it in a dry,

- static-free environment.
3. Do not use the remote control in a large area of metal or in an environment with strong electromagnetic waves nearby, otherwise, the control distance will be seriously affected.

---

## Documents / Resources

	<p><a href="#">MiBOXER C1 4 Zone Color Temperature Remote</a> [pdf] Instruction Manual C1, C1 4 Zone Color Temperature Remote, 4 Zone Color Temperature Remote, Color Temperature Remote, Temperature Remote, Remote</p>
---	--

## References

- [User Manual](#)