

MICROCHIP DS70664B ZENA Wireless Adapter User Guide

Home » MICROCHIP » MICROCHIP DS70664B ZENA Wireless Adapter User Guide 🖫



ZENA™ Wireless Adapter User's Guide

Contents

- 1 DS70664B ZENA Wireless
- **Adapter**
- **2 INTRODUCTION**
- **3 WARRANTY REGISTRATION**
- **4 CUSTOMER SUPPORT**
- **5 DOCUMENT REVISION HISTORY**
- 6 Chapter 1. Overview
- 7 Chapter 2. Getting Started
- 8 Documents / Resources
 - 8.1 References

DS70664B ZENA Wireless Adapter

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of

intellectual property.

- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

QUALITY MANAGEMENT SYSTEM CERTIFIED BY DNV

ISO/TS 16949:2009

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PilC micro, PICSTART, Pics? logo, rfPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

Filter Lab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A. Analog-for-the-Digital Age, Application Maestro, chip KIT, chip KIT logo, Code Guard, dsPICDEM, dsPICDEM.net, dsPiC works, dsSPEAK, ECAN, ECONOMONITOR, Fan Sense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscient Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICkit, PICtail, REAL ICE, rfLAB, Select Mode, Total Endurance, TSHARC, Uni Win Driver, Wiper Lock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2011-2012, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

Printed on recycled paper. ISBN: 978-1-61341-964-9

ISBN: 978-1-61341-964-9

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those

in this document. Please refer to our web site (<u>www.microchip.com</u>) to obtain the latest documentation available.

Documents are identified with a "DS" number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is "DSXXXXXA", where "XXXXXX" is the document number and "A" is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE on-line help. Select the Help menu, and then Topics to open a list of available on-line help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the ZENA™ Wireless Adapter. Items discussed in this chapter include:

- · Document Layout
- · Conventions Used in this Guide
- · Warranty Registration
- · Recommended Reading
- The Microchip Web Site
- Development Systems Customer Change Notification Service
- Customer Support
- · Document Revision History

DOCUMENT LAYOUT

This document describes how to use the ZENA Wireless Adapter. The manual layout is as follows:

- Chapter 1. "Overview" This chapter provides a brief overview of the ZENA Wireless Adapter, including kit
 contents and features.
- Chapter 2. "Getting Started" This chapter describes how to start using your ZENA Wireless Adapter.
- Appendix A. "ZENA™ Wireless Adapter Construction Details" This appendix contains the schematics, PCB layout and Bill of Materials (BOM).

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples				
Arial font:						
Italic characters	Referenced books	MPLAB® IDE User's Guide				
italic Grafacters	Emphasized text	is the only compiler				
	A window	the Output window				
Initial caps	A dialog	the Settings dialog				
	A menu selection	select Enable Programmer				
Quotes	A field name in a window or dialog	"Save project before build"				
Underlined, italic text with right angle bracket	A menu path	File>Saye				
	A dialog button	Click OK				
Bold characters	A tab	Click the Power tab				
N`Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4t0010, 21)Ft				
Text in angle brackets < >	A key on the keyboard	Press <enter>, <f1></f1></enter>				
Courier New font:						
	Sample source code	#define START				
	Filenames	autoexec.bat				
	File paths	c:\mcc18\h				
Plain Courier New	Keywords	_ asm, _ endasm, static				
	Command-line options	-Opa+, -Opa-				
	Bit values	0, 1				
	Constants	OxFF, 'A'				
Italic Courier New	A variable argument	file. o, where file can be any valid fil ename				
Square brackets []	Optional arguments	mcc18 [options] file [options]				
Curly brackets and pipe character: { I }	Choice of mutually exclusive argum ents; an OR selection	errorlevel {0 1}				
	Replaces repeated text	var_name [, var_name]				
Ellipses	Represents code supplied by user	void main (void) { }				

Please complete the enclosed Warranty Registration Card and mail it promptly.

Sending in the Warranty Registration Card entitles users to receive new product updates. Interim software releases are available at the Microchip web site.

RECOMMENDED READING

This user's guide describes how to use the ZENA Wireless Adapter. The following Microchip documents are available from the Microchip web site (www.microchip.com), and are recommended as supplemental reference resources.

MRF24J40MA 2.4 GHz IEEE Std. 802.15.4 RF Transceiver Module Data Sheet (DS70329)

MRF89XAM8A 868 MHz Ultra-Low Power Sub-GHz Transceiver Module Data Sheet (DS70651)

MRF89XAM9A 915 MHz Ultra-Low Power Sub-GHz Transceiver Module Data Sheet (DS75017)

PIC18F46J50 USB Microcontroller Data Sheet (DS39931)

MCP1700 Low Quiescent Current LDO Data Sheet (DS21826)

25LC256 256K SPI Bus Serial EEPROM Data Sheet (DS21822)

2K SPI Bus Serial EEPROM with EUI-48™ Node Identity Data Sheet (DS22123)

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers.

Accessible by using your favorite Internet browser, the web site contains the following information:

- Product Support Data sheets and errata, application notes and sample programs, design resources, user's
 guides and hardware support documents, latest software releases and archived software
- General Technical Support Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- Business of Microchip Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

DEVELOPMENT SYSTEMS CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at www.microchip.com, click on Customer Change Notification and follow the registration instructions.

The Development Systems product group categories are:

- Compilers The latest information on Microchip C compilers and other language tools. These include the MPLAB C18 and MPLAB C30 C compilers; MPASM™ and MPLAB ASM30 assemblers; MPLINK™ and MPLAB LINK30 object linkers; and MPLIB™ and MPLAB LIB30 object librarians.
- Emulators The latest information on Microchip in-circuit emulators. This includes the MPLAB ICE 2000 and MPLAB ICE 4000.
- In-Circuit Debuggers The latest information on the Microchip in-circuit debugger, MPLAB ICD 2.
- MPLAB® IDE The latest information on Microchip MPLAB IDE, the Windows® Integrated Development Environment for development systems tools. This list is focused on the MPLAB IDE, MPLAB SIM simulator, MPLAB IDE Project Manager and general editing and debugging features.
- Programmers The latest information on Microchip programmers. These include the MPLAB PM3 and PRO MATE® II device programmers and the PICSTART® Plus and PICkit™ 1 development programmers.

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- · Local Sales Office
- Field Application Engineer (FAE)
- · Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: http://support.microchip.com

DOCUMENT REVISION HISTORY

Revision A (June 2011)

This is the initial released version of the document.

Revision B (January 2012)

This revision incorporates the following updates:

- · Preface:
 - Updated "Recommended Reading"
- Chapters:
 - Updated Ta ble 1 -1 in Chapter 1. "Overview"
 - Updated the title for Figure 1-1 in Chapter 1. "Overview"
 - Removed the note in 2.2.2 "Installing USB Drivers"
 - Updated the first paragraph in 2.2.2.1 "Installing the USB Driver for Windows® 2000/XP/Vista/7 OSs"
 - Updated step 3 and step 4 in 2.2.2.1 "Installing the USB Driver for Windows® 2000/XP/Vista/7 OSs"
 - Replaced the figure in Figure 2-5
 - Replaced the figure in Figure 2-6
 - Updated the title for Figure A-1 in Appendix A. "ZENA™ Wireless Adapter Construction Details"
 - Updated the title for Figure A-2 in Appendix A. "ZENA™ Wireless Adapter Construction Details"
 - Added Figure A-2 in Appendix A. "ZENA™ Wireless Adapter Construction Details"
- Minor updates related to formatting and text have been incorporated throughout the document

Chapter 1. Overview

1.1 INTRODUCTION

The ZENA Wireless Adapter is a multi-function USB wireless adapter connecting USB-equipped desktop or notebook computers with Microchip wireless products for development or application uses. As a development tool, the ZENA Wireless Adapter can be used as a protocol analyzer or as a diagnostic tool. It can also be used to connect the computer as a wireless node to the network for application uses. The ZENA Wireless Adapter is capable of performing a variety of functions and each function can be programmed into the adapter using the built in USB boot loader.

Additional software and firmware updates can be downloaded from the Microchip web site: http://www.microchip.com/zena.

This chapter discusses:

- ZENA Wireless Adapter Package Contents
- ZENA Wireless Adapter Description
- · Regulatory Statements

1.2 ZENA WIRELESS ADAPTER PACKAGE CONTENTS

Depending on the frequency and device type ZENA Wireless Adapter ordered, the package may contain one of the following listed in Table 1-1.

TABLE 1-1: ZENA™ WIRELESS ADAPTER

Description	Part Number
ZENA™ Wireless Adapter – 2.4 GHz MRF24J40	AC182015-1
ZENA Wireless Adapter – 868 MHz MRF89XA	AC182015-2
ZENA Wireless Adapter – 915 MHz MRF89XA	AC182015-3

1.3 ZENA WIRELESS ADAPTER DESCRIPTION

The ZENA Wireless Adapters are shown in Figure 1-1.

FIGURE 1-1: ZENA™ WIRELESS ADAPTERS



ZENATM Wireless Adapters (Part # AC182015-1, AC182015-2, & AC182015-3)

The ZENA Wireless Adapter plugs into the computers USB slot either directly or using an extension cable. The LED indicates operation status.

1.4 REGULATORY STATEMENTS

1.4.1 United States

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment OFF and ON.

The user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

1.4.2 Canada

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Chapter 2. Getting Started

2.1 INTRODUCTION

The ZENA Wireless Adapter is a flexible, multipurpose device. Firmware applications can be updated from a computer application program such as the Wireless Development Studio.

The ZENA Wireless Adapter is pre-programmed with a MiWiTM Wireless Protocol Sniffer application. This allows the user to display MiWi Wireless Protocol packets in a graphical format in the Wireless Development Studio. ZENA Wireless Adapter software and firmware updates can be downloaded from the Microchip web site http://www.microchip.com/zena.

2.2 INSTALLATION

2.2.1 Installing the Wireless Development Studio

The Wireless Development Studio can be downloaded from the Microchip web site: http://www.microchip.com/wds. Install the program following the installation instructions that come with the package.

2.2.2 Installing USB Drivers

The ZENA Wireless Adapter has been designed to communicate with the Microchip MPLAB Comm driver which is based on the libusb-win32 (for Windows) and libusb (for Mac and Linux operating systems) libraries. The USB Drivers come with the Wireless Development Studio. To install the USB drivers, follow the sections below for the operating system of choice.

2.2.2.1 INSTALLING THE USB DRIVER FOR WINDOWS® 2000/XP/VISTA/7 OSs

To Install the USB Driver for windows, perform the following tasks:

Note: In the following screenshots, we have used ZENA Wireless Adapter –2.4 GHz MRF24J40. The same set of sequence is applicable for ZENA Wireless Adapter – 868 MHz MRF89XA and ZENA Wireless Adapter – 915 MHz MRF89XA.

1. Plug in the ZENA Wireless Adapter into a USB port. Windows will prompt for a hardware installation as shown in Figure 2-1.


FIGURE 2-1: FOUND NEW HARDWARE WIZARD WINDOW



2. Select Install the software automatically (Recommended) and then click Next.

Windows will search and install the driver automatically as shown in Figure 2-2.

FIGURE 2-2: INSTALLING THE DRIVER

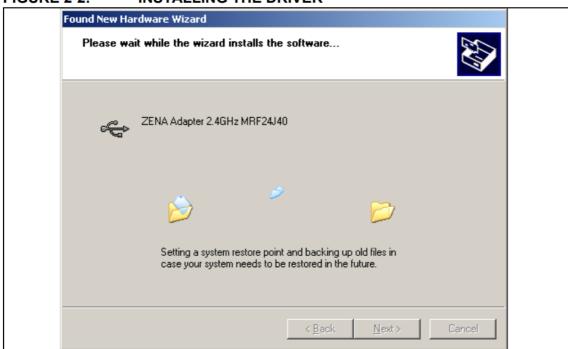

- 3. If Windows is unable to find the hardware for the device, then click Back and select Install from a list or specific location (Advanced).
 - a) The driver for ZENA Wireless Adapter 2.4 GHz MRF24J40 is located in the "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 2.4 GHz MRF24J40\" folder.


Note: Default installation location for WDS on Windows is C:\Program Files\Microchip\

- b) The driver for ZENA Wireless Adapter 868 MHz MRF89XA is located in the "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 868 MHz MRF89XA\" folder.
- c) The driver for ZENA Wireless Adapter 915 MHz MRF89XA is located in the "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 915 MHz MRF89XA\" folder.
- 4. After installing the driver, if Windows prompts the following Dynamic Linked Libraries (DLLs):

WinUSBCoInstaller2.dll, WdfCoInstaller01009.dll and WUDFUpdate_01009.dll as shown in Figure 2-3:

- a) If installing in a Windows 32-bit system, point the folder location to "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 2.4 GHz MRF24J40\i386\" (or) "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 868 MHz MRF89XA\i386\" (or) "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 915 MHz MRF89XA\i386\"
- b) If installing in a Windows 64-bit system, point the folder location to "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 2.4 GHz MRF24J40\amd64\" (or) "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 868 MHz MRF89XA\amd64\" (or) "Wireless Development Studio\Driver and Inf\ZENA Wireless Adapter 915 MHz MRF89XA\amd64\"

FIGURE 2-3: INSTALLING DYNAMIC LINKED LIBRARIES (DLLs)

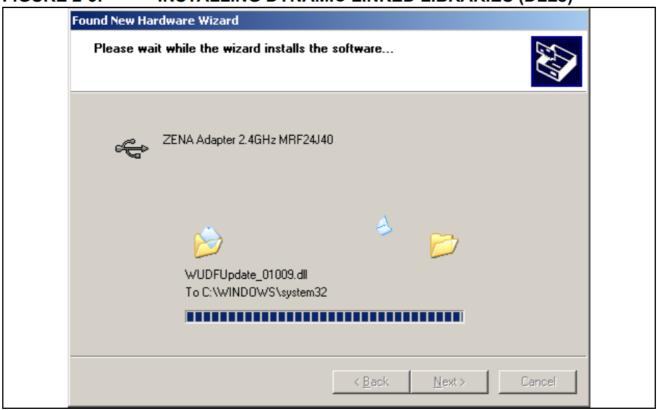

- 5. After installing the driver and DLLs, the Completing the Found New Hardware Wizard appears on the screen as shown in Figure 2-4.
- 6. Click Finish to complete the installation.

FIGURE 2-4: COMPLETING THE FOUND NEW HARDWARE WIZARD



2.2.2.2 INSTALLING THE USB DRIVER FOR MAC OR LINUX OSs


The ZENA Wireless Adapter uses the lib USB drivers. When installing the USB drivers on a Mac or Linux computer, the installer will place the USB drivers in the proper location.

2.3 USING ZENA WIRELESS ADAPTER WITH THE WIRELESS DEVELOPMENT STUDIO

To use the ZENA Wireless Adapter with the Wireless Development Studio, it must first be selected as the source device by performing the following tasks:


1. From the main window, select Sniffer as the active application, see Figure 2-5. The Packet List window will appear.

FIGURE 2-5: SNIFFER APPLICATION SELECTION

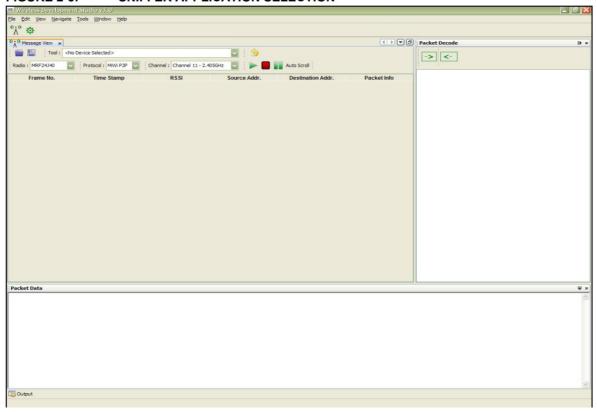

2. From the Packet List window, select ZENA Wireless Adapter from the Source drop-down box, see Figure 2-6.

FIGURE 2-6: WIRELESS DEVELOPMENT STUDIO SELECTION

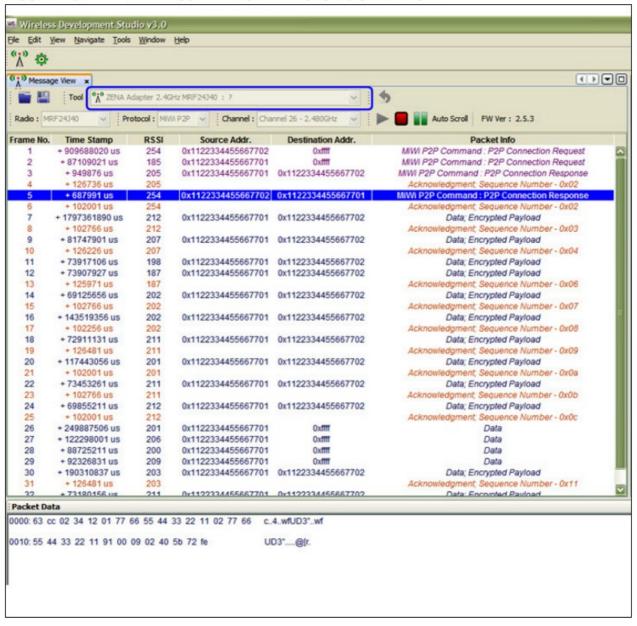


Note: If multiple ZENA Wireless Adapters are plugged in, they can be individually chosen by serial number. For more information on running the Wireless Development Studio, see the Wireless Development Studio help.

A.1 INTRODUCTION

This appendix provides the ZENA Wireless Adapater schematics, PCB layout and Bill of Materials (BOM).

A.2 ZENA WIRELESS ADAPTER SCHEMATIC

Figure A-1 and Figure A-2 illustrate the ZENA Wireless Adapter schematics.

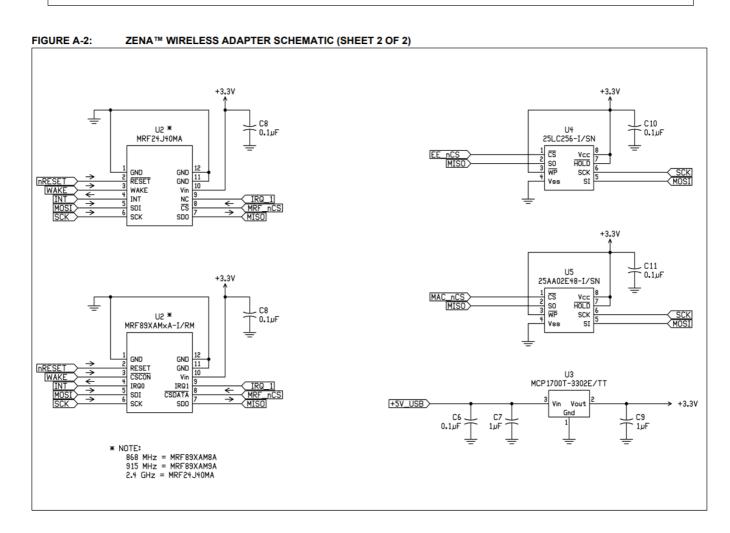

A.3 ZENA WIRELESS ADAPTER PCB LAYOUT

The ZENA Wireless Adapter PCB is a 4-layer, high temperature FR4, 0.031 inch, plated through hole construction. Figure A-3 through Figure A-8 show the PCB layers. Figure A-3 illustrates the ZENA Wireless

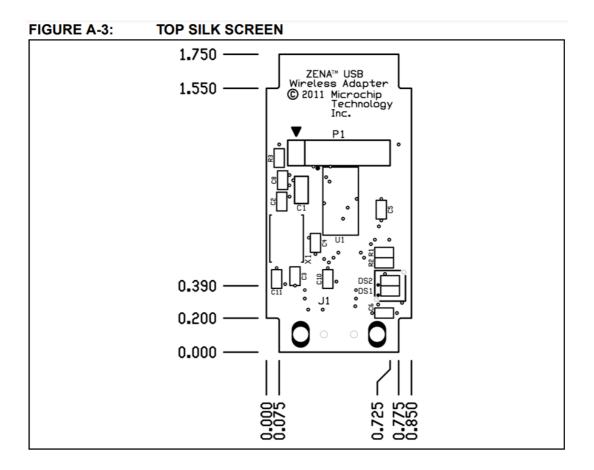


Figure A-4 illustrates the ZENA Wireless Adapter top copper.

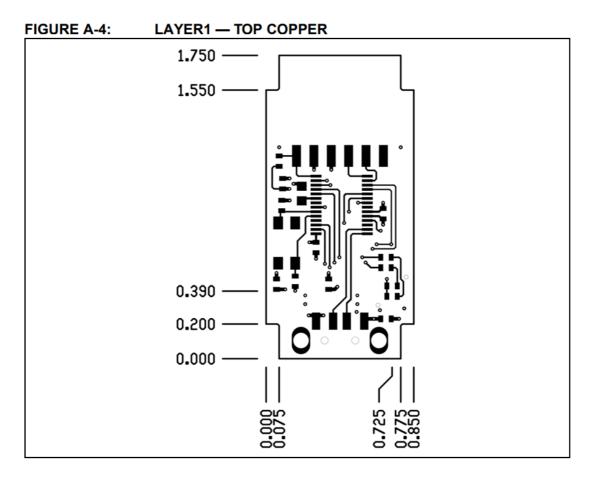


Figure A-5 illustrates the ZENA Wireless Adapter ground plane.

1.750 — 1.550 — 0.200 — 0.000

Figure A-6 illustrates the ZENA Wireless Adapter power plane.

FIGURE A-6: LAYER 3 — POWER PLANE

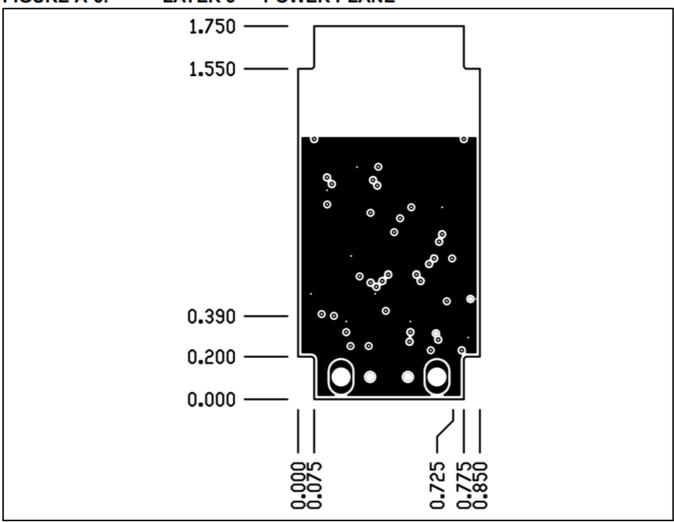


Figure A-7 illustrates the ZENA Wireless Adapter bottom copper.


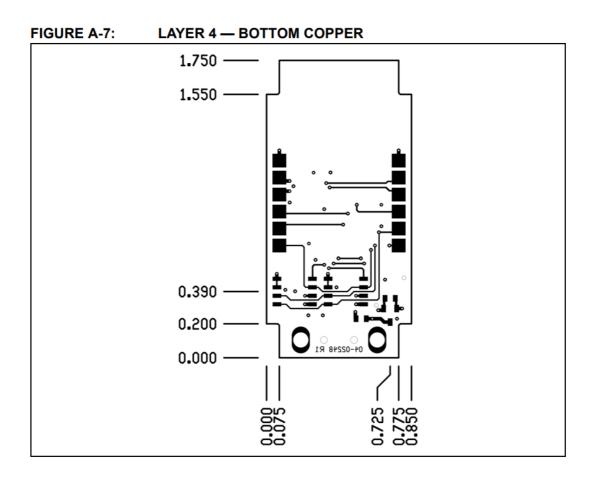


Figure A-8 illustrates the ZENA Wireless Adapter bottom silk screen.

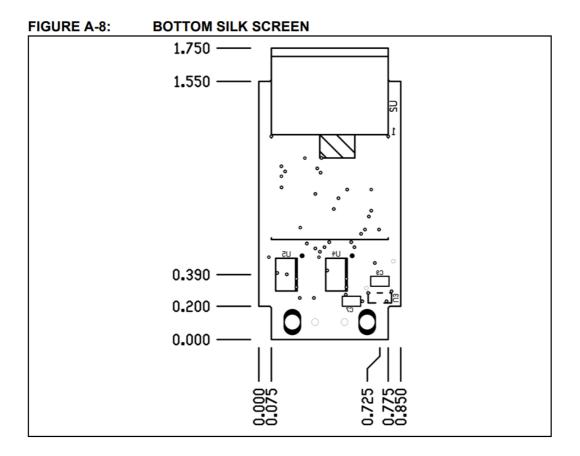

A.4 ZENA WIRELESS ADAPTER BILL OF MATERIALS

Ta ble A- 1 provides a detailed description of the ZENA Wireless Adapter Bill of Materials (BOM).

TABLE A-1: BILL OF MATERIALS

Qty	Designator	Value	Description	Manufacturer	Manufacturer Part Num ber
2	C2, C3	22 pF	Capacitor, Ceramic , SMT 0603	Murata Electronics N orth America	GRM1885C1H220JA01D
6	C4, C5, C6, C8, C10, C11	0.1 pF	Capacitor, Ceramic , 16V, tiff°, X7R, S MT 0603	Murata Electronics N orth America	GRM188R71C104KAO1D
2	C7, C9	1 pF	Capacitor, Ceramic , 6.3V, ±10%, X5R, SMT 0603	Murata Electronics N orth America	GRM188R60J105KAO1D
1	C1	10 pF	Capacitor, Ceramic , 6.3V, ±20%, X5R, SMT 0805	Murata Electronics N orth America	GRM21BR60J106ME19L
1	DS1	Green	Diode, Light Emittin g, Green	OSRAM	LG Q971-KN-1-0-20-R18
1	DS2	Red	Diode, Light Emittin g, Red	OSRAM	LS Q976-NR-1-0-20-R18
1	J1	_	Connector, Plug U SB 4Pos RT Ang S MD	Molex	480371000
2	R1, R2	470 ohms	Resistor, Thin Film File, SMT 0603	Stackpole Electronics	RMCF0603JT47OR
1	R3	10K ohms	Resistor, Thin Film File, SMT 0603	Stackpole Electronics	RMCF0603JT10K0
1	U1	_	PIC18F26J50-1/SS	Microchip Technology	PIC18F26J50-1/SS
1	U2 alternates: M RF89XAM8A (86 8 MHz) and MRF89XAM9A (915 MHz)	_	MRF24J40MA (or) MRF89XAM8A (or) MRF89XAM9A	Microchip Technology	MRF24J40MA-1/RM (or) MRF89XAM8A-I/RM (or) MRF89XAM9A-I/RM
1	U3	_	MCP1700T-3302E	Microchip Technology	MCP1700T-3302E/TT
1	U4	_	25LC256-I/SN	Microchip Technology	25LC256-I/SN
1	U5		25AA02E48-1/SN	Microchip Technology	25AA02E48-1/SN
1	X1	8 MHz	Crystal, SMT, 8 MH	Abracon	ABMM-8.000MHZ-B2-T
1	@DS1 and DS2	_	Light Pipe, Vertical, 0.300" round	Bivar Inc.	VLP-300-R
1	Enclosure	_	Enclosure, USB De vice	New Age Enclosures	P-201005

AMERICAS	ASIA/PACIFIC	ASIA/PACIFIC	EUROPE
Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7270 Fax: 480-792-7277 Technical Support: http://www.microchip.c om/support Web Address: www.microchip.com Atlanta Duluth, GA Tel: 678-957-9614 Fax: 678-957-1455 Boston Westborough, MA Tel: 774-760-0087 Fax: 774-760-0088 Chicago Itasca, IL Tel: 630-285-0071 Fax: 630-285-0075 Cleveland Independence, OH Tel: 216-447-0464 Fax: 216-447-0464 Fax: 216-447-0643 Dallas Addison, TX Tel: 972-818-7423 Fax: 972-818-2924 Detroit Farmington Hills, MI Tel: 248-538-2250 Fax: 248-538-2260 Indianapolis Noblesville, IN Tel: 317-773-5453 Los Angeles Mission Viejo, CA Tel: 949-462-9523 Fax: 949-462-9608 Santa Clara Santa Clara Santa Clara Santa Clara Clara, CA Tel: 408-961-6444 Fax: 408-961-6445 Toronto Mississauga, Ontario, Ca nada Tel: 905-673-0699 Fax: 905-673-6509	Asia Pacific Office Suites 3707-14, 37th Floo r Tower 6, The Gateway Harbour City, Kowloon Hong Kong Tel: 852-2401-1200 Fax: 852-2401-3431 Australia – Sydney Tel: 61-2-9868-6733 Fax: 61-2-9868-6755 China – Beijing Tel: 86-10-8569-7000 Fax: 86-10-8528-2104 China – Chengdu Tel: 86-28-8665-5511 Fax: 86-28-8665-7889 China – Chongqing Tel: 86-23-8980-9588 Fax: 86-23-8980-9500 China – Hangzhou Tel: 86-571-2819-3187 Fax: 86-571-2819-3187 Fax: 86-571-2819-3189 China – Hong Kong SAR Tel: 852-2401-1200 Fax: 852-2401-3431 China – Nanjing Tel: 86-25-8473-2470 China – Qingdao Tel: 86-532-8502-7355 Fax: 86-532-8502-7355 Fax: 86-532-8502-7355 Fax: 86-21-5407-5533 Fax: 86-21-5407-5066 China – Shanghai Tel: 86-24-2334-2829 Fax: 86-24-2334-2829 Fax: 86-24-2334-2829 Fax: 86-24-2334-2829 Fax: 86-24-2334-2829 Fax: 86-27-5980-5300 Fax: 86-755-8203-1760 China – Shenzhen Tel: 86-75-8203-1760 China – Shenzhen Tel: 86-29-8833-7252 Fax: 86-29-8833-7256 China – Xian Tel: 86-592-2388138 Fax: 86-592-2388130 China – Zhuhai Tel: 86-756-3210040 Fax: 86-756-3210049	India – Bangalore Tel: 91-80-3090-4444 Fax: 91-80-3090-4123 India – New Delhi Tel: 91-11-4160-8631 Fax: 91-11-4160-8632 India – Pune Tel: 91-20-2566-1512 Fax: 91-20-2566-1513 Japan – Osaka Tel: 81-66-152-7160 Fax: 81-66-152-9310 Japan – Yokohama Tel: 81-45-471-6166 Fax: 81-45-471-6122 Korea – Daegu Tel: 82-53-744-4301 Fax: 82-53-744-4302 Korea – Seoul Tel: 82-2-554-7200 Fax: 82-2-558-5932 or 82-2-558-5934 Malaysia – Kuala LumpTe I: 60-3-6201-9857 Fax: 60-3-6201-9857 Fax: 60-3-6201-9859 Malaysia – Penang Tel: 60-4-227-8870 Fax: 60-4-227-8870 Fax: 60-4-227-4068 Philippines – Manila Tel: 63-2-634-9065 Fax: 63-2-634-9069 Singapore Tel: 65-6334-8870 Fax: 65-6334-8870 Fax: 65-6334-8850 Taiwan – Hsin Chu Tel: 886-3-5778-366 Fax: 886-3-5770-955 Taiwan – Kaohsiung Tel: 886-7-330-9305 Taiwan – Taipei Tel: 886-2-2500-6610 Fax: 886-2-2500-6610 Fax: 886-2-694-1351 Fax: 66-2-694-1351 Fax: 66-2-694-1350	Austria – Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark – Copenhagen Tel: 45-4450-2828 Fax: 45-4485-2829 France – Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 Germany – Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-4 Italy – Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Netherlands – Drunen Tel: 31-416-690399 Fax: 31-416-690340 Spain – Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 UK – Wokingham Tel: 44-118-921-5869 Fax: 44-118-921-5820



DS70664B-page 30
Downloaded from <u>Arrow.com</u>.
© 2011-2012 Microchip Technology Inc.

Documents / Resources



MICROCHIP DS70664B ZENA Wireless Adapter [pdf] User Guide
DS70664B ZENA Wireless Adapter, DS70664B, ZENA Wireless Adapter, Wireless Adapter, Ad

apter

SP-Elmostowyn, 1994

References

- Microchip Lightning Support
- <u>Sempowering Innovation | Microchip Technology</u>
- Microchip Lightning Support

Manuals+,