

Contents [[hide](#)]

- [1 MICROCHIP VIDEO-DC-DP DisplayPort FMC Daughter Card](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Introduction](#)
- [5 Demo Requirements](#)
- [6 Setting up the Hardware](#)
- [7 Software and Licensing](#)
- [8 Documentation Resources](#)
- [9 Microchip Information](#)
- [10 FAQ](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)



MICROCHIP VIDEO-DC-DP DisplayPort FMC Daughter Card



Specifications

- Product Name: DisplayPort FPGA Mezzanine Card (FMC) Daughter Card
- Model Number: VIDEO-DC-DP
- Supported FPGA: PolarFire and PolarFire SoC
- DisplayPort Version: 1.4
- Maximum Speed: 8.1 Gbps per lane
- Configuration Options: 1, 2, or 4-lane

Product Usage Instructions

- DisplayPort FMC card (VIDEO-DC-DP)
- DisplayPort A Male-to-Male cable
- HDMI monitor
- Host PC with USB port
- Software: FlashPro Express with Libero SoC installed
- This section demonstrates the usage and running of the imaging and video demo using the PolarFire Video kit, with a Host PC and a DisplayPort Rx.
- Connect the DisplayPort FMC card to the J14 FMC connector on the PolarFire Video kit.

Introduction

- Microchip's DisplayPort FPGA Mezzanine Card (FMC) Daughter Card (VIDEO-DC-DP) is a dedicated platform for evaluating and testing the comprehensive IP for transmit and receive, and a ready-to-run demonstration design.
- The daughter card works with the PolarFire® Video and Imaging Kit (MPF300-VIDEO-KIT-NS) featuring the PolarFire® 300KLE FPGA device.
- The PolarFire and PolarFire SoC FPGAs support DisplayPort v1.4 with a transceiver-based IP that can attain speeds up to 8.1 Gbps per lane in 1, 2, or 4-lane configurations.
- This solution is part of Microchip's extensive Smart Embedded Vision Portfolio of IPs and solutions.
- The IP is license-locked in clear text RTL. It supports the generation of encrypted RTL for a Verilog version with no license.

- The IP and the hardware must be purchased separately as where applicable.
- The following table shows the contents of the DisplayPort FMC daughter card.

Table 1-1. VIDEO-DC-DP Contents

Quantity	Description
1	DisplayPort FMC daughter board
1	Quickstart card

Demo Requirements

The following table lists the hardware and software required to run the demo.

Table 2-1. Demo Requirements


Requirement	Description
Hardware	
PolarFire® Video Kit	MPF300-VIDEO-KIT-NS Kit Contents: <ul style="list-style-type: none"> • PolarFire Video and Imaging board with MPF300T-1FCG1152E Device • HDMI cable • 12V power pack/AC adapter • USB 2.0 A male to mini-B
DisplayPort FMC card	VIDEO-DC-DP
DisplayPort cable	DisplayPort A Male-to-Male cable

HDMI monitor	1920 × 1080 (60 Hz) resolution
Host PC with USB port	—
Software	
Libero® SoC	FlashPro Express is installed with Libero SoC .
Prerequisites	
<p>Before you begin, ensure that you download the following file from AN4684: PolarFire DisplayPort Rx Solution with Video Output, mpf_an4684_v2024p2_jb: Job file to test on PolarFire Video kit.</p>	

Setting up the Hardware

The following figure shows the hardware setup of the DisplayPort FMC with the PolarFire Video kit.

Figure 3-1. Setting up the Hardware

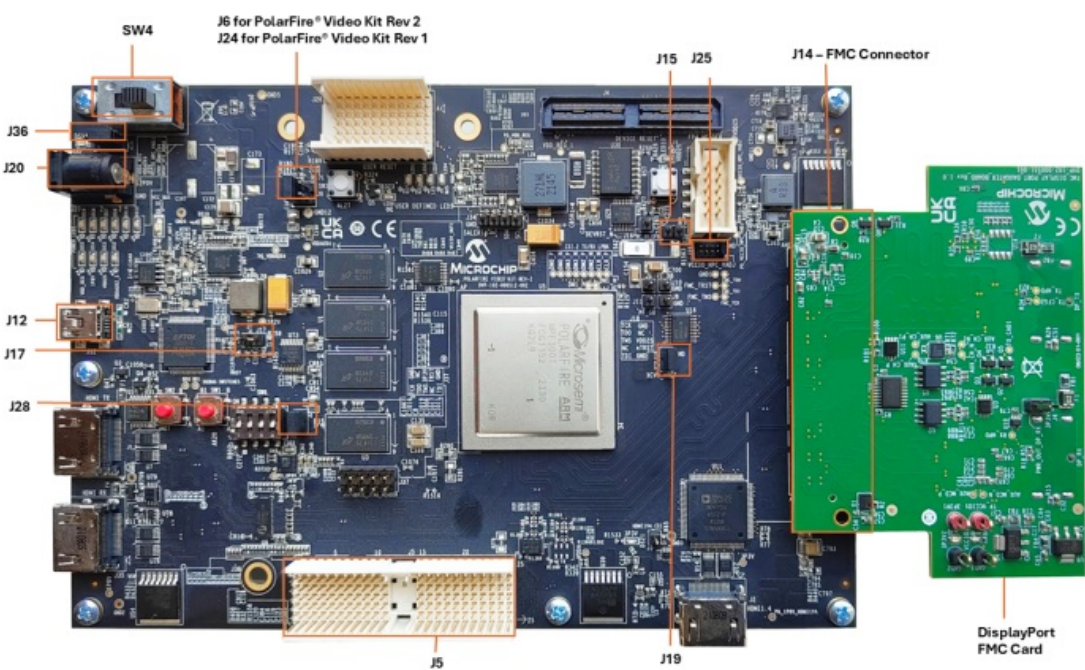

The following table lists the jumper and switch settings of the PolarFire Video kit

Table 3-1. Jumper and Switch Settings of PolarFire Video Kit

Jumper and Switch	Position	Description
J15	Open (default)	SPI Target and Initiator mode selection. By default, select SPI Initiator.
J14	DisplayPort FMC	DisplayPort FMC to be connected
J17	Open	100K PD for TRSTn
J19	Pin 1 and 2 (default)	Default: XCVR_VREF is connected to ground
J28	Pin 1 and 2 (default)	Default: Programming through the FTDI
J24 (For Video Kit Rev1) J6 (For Video Kit Rev2)	Pin 1 and 3	Default: VDDAUX4 voltage is set to 2.5V.
J25	Pin 5 and 6	Bank4 voltage, which is set to 1.8V.
J36	Pin 1 and 2 (default)	Default: Board power-up through the SW4
SW4	OFF or ON	Power On or Off slide switch
SW6	OFF	User slide switch. Default position: Off
J20	12 Volts Input	12V input to the board
J12	USB-UART	USB-UART mini cable

PolarFire Display Port Rx Solution with Video Demo

- This section demonstrates the usage and running of the imaging and video demo using the PolarFire Video kit, with a Host PC and a DisplayPort Rx.

Setting up the Hardware for the PolarFire DisplayPort Rx

To set up the hardware for the PolarFire DisplayPort Rx, perform the following steps:

1. To connect the DisplayPort FMC card, attach the DisplayPort FMC card to the J14 FMC connector on the PolarFire Video kit.
2. To connect the host laptop, use a DisplayPort cable to connect the laptop's DisplayPort output to the DisplayPort Rx interface on the DisplayPort FMC card.
3. To connect the HDMI output, connect an HDMI cable from the monitor to the J1 (HDMI TX) port on the PolarFire Video kit.
4. To establish host PC communication, use a USB mini cable to connect the host PC to the PolarFire Video kit through the J12 connector.
5. To power the board, plug the 12V power supply cable into the J20 onboard DC jack of the video kit.
6. Ensure the jumper settings on the video kit are configured as required for the demo.
7. To power on the Board, slide the SW4 switch to the ON position.

Programming the PolarFire Device Using FlashPro Express

To program the PolarFire device, perform the following steps:

1. On the host PC, start the FlashPro Express software from its installation directory.
2. To create a new job project, navigate to the Project menu and click New or New Job Project from FlashPro Express Job.
3. In the New Job Project from FlashPro Express Job dialog box, perform the following steps:
 1. Programming job file: Click Browse and navigate to the location of the job file, and then select the file. The default location is `mpf_an4576_v2024p2_df\designer\top\export`.
 2. FlashPro Express job project location: Click Browse, and navigate to the location where you want to save the project.
4. Click OK. The required programming file is selected and ready to be programmed in

the device. The FlashPro Express window appears.

5. Verify that a programmer number appears in the Programmer box. If it does not, verify the board connections, and then click Refresh/Rescan Programmers.
6. To program the device, click RUN. When the device is programmed successfully, a RUN PASSED status appears.
7. To close FlashPro Express, click Project>Exit.

The PolarFire device and SPI Flash are programmed. Power cycle the board using the SW4 switch. After power cycling, the full HD DisplayPort monitor displays the camera feed.

Running the Demo

This demonstration showcases a video processing system that:

- Receives video data through DisplayPort input
- Processes it through the FPGA board
- Outputs the video signal through HDMI
- Functions once the FPGA is programmed and all connections are set up correctly

The demonstration showcases the successful integration and operation of the display interface conversion from DisplayPort to HDMI. The following figure illustrates the demo setup and its components, including the host PC, FPGA board, and HDMI monitor.

Figure 3-2. HDMI TX Displaying the Laptop Data from DisplayPort Rx



PolarFire DisplayPort Tx Solution with Video Demo

- This section demonstrates the usage and running of the imaging and video demo using the PolarFire Video kit, with a Host PC and a DisplayPort Tx.

Setting up the Hardware for PolarFire DisplayPort Tx

To set up the hardware for the PolarFire DisplayPort Tx, perform the following steps:

- Connect the DisplayPort daughter card to J14 of the FMC connector of the PolarFire Video kit.
- Connect the DisplayPort cable to the DisplayPort Tx on the DisplayPort FMC daughter card.
- Connect the Host PC and the video kit using the USB mini cable through J12 on the video kit.
- Connect the 12V power supply cable to the J20 onboard DC jack on the video kit.
- Ensure that the jumper settings on the video kit are correctly configured according to the preceding table.
- Power up the board using the SW4 slide switch.
- After powering up, program the PolarFire Video kit device. For more information, see

Programming the PolarFire Device using FlashPro Express.

- Once the PolarFire device is programmed, the live feed starts streaming the camera video data.

Programming the PolarFire Device using FlashPro Express

This section describes how to program the PolarFire Video kit with the .job file using FlashPro Express. The .job file mpf_an4576_v2024p2_jb to test on the PolarFire Video kit is provided here: [AN4576](#)

To program the PolarFire device, perform the following steps:

1. On the host PC, start the FlashPro Express software from its installation directory.
2. To create a new job project on the Project menu, click New or New Job Project from FlashPro Express Job.
3. In the New Job Project from FlashPro Express Job dialog box, perform the following steps:
 1. Programming job file: Click Browse, navigate to the location of the job file, and then select the file. The default location is <\$designfiles download directory>\mpf_an4576_v2024p2_df\VKPFC1DPTX\designer\VIDEO_KIT_TOP\export\dp_tx_d
 2. FlashPro Express job project location: Click Browse, and navigate to the location where you want to save the project.
4. Click OK. The required programming file is selected and ready to be programmed in the device. The FlashPro Express window appears.
5. Verify that a programmer number appears in the Programmer box. If it does not, confirm the board connections, and then click Refresh/Rescan Programmers.
6. To program the device, click RUN. When the device is programmed successfully, the RUN PASSED status appears.
7. To close FlashPro Express, click Project Exit.

The PolarFire device and SPI Flash are programmed. Power cycle the board using the SW4 switch. After power cycling, the full HD DisplayPort monitor displays the camera feed from the camera.

Running the Demo

This demonstration showcases a video processing system that:

- Captures 4K video data from a MIPI camera• Processes the raw images through multiple enhancement stages (Bayer interpolation, gamma correction, and image enhancement)
- Stores the frames in DDR memory
- Outputs the processed video to a DisplayPort monitor
- Features automatic exposure adjustment based on lighting conditions
- The system functions as an end-to-end pipeline, taking raw camera input and producing enhanced live video output on a display. The following figure shows the DisplayPort monitor displaying the live camera feed.
- Figure 3-3. DisplayPort Monitor: Displaying the Live Camera Feed



Software and Licensing

- Libero® SoC PolarFire Design Suite offers high productivity with its comprehensive, easy-to-learn, and easy-to-adopt development tools for designing with Microchip's PolarFire FPGAs.
- The suite integrates industry-standard Synopsys® Synplify Pro® synthesis and Siemens EDA ModelSim® simulation with best-in-class constraints management and debug capabilities. Download the latest Libero SoC release from [Libero SoC v12.0 or later website](#)

Documentation Resources

- For more information on DisplayPort FMC Daughter Card, including Schematics and Application notes, see [VIDEO-DC-DP](#).

Microchip Information

Trademarks

- The “Microchip” name and logo, the “M” logo, and other names, logos, and brands are registered and unregistered trademarks of Microchip Technology Incorporated or its affiliates and/or subsidiaries in the United States and/or other countries (“Microchip Trademarks”). Information regarding Microchip Trademarks can be found at <https://www.microchip.com/en-us/about/legal-information/microchip-trademarks>.
- ISBN: 979-8-3371-0763-9

Legal Notice

- This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information
- in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates.
- It is your responsibility to ensure that your application meets your
- specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.
- THIS INFORMATION IS PROVIDED BY MICROCHIP “AS IS”. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.
- IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS

USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OF DAMAGES OR THEY ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

- Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify, and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use.
- No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip Devices Code Protection Feature

The following details of the code protection feature on Microchip products:


- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip products are strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is "unbreakable". Code protection is constantly evolving.
- Microchip is committed to continuously improving the code protection features of our products.

FAQ

- **Q:** Can I use a different brand of FPGA with the DisplayPort FMC?
- **A:** No, the DisplayPort FMC is specifically designed for use with PolarFire and PolarFire SoC FPGAs.
- **Q:** Is the IP included with the DisplayPort FMC purchase?

- **A:** No, the IP and hardware must be purchased separately.

Documents / Resources

	MICROCHIP VIDEO-DC-DP DisplayPort FMC Daughter Card [pdf] User Guide VIDEO-DC-DP, VIDEO-DC-DP DisplayPort FMC Daughter Card, DisplayPort FMC Daughter Card, FMC Daughter Card, Daughter Card
---	---

References

- [User Manual](#)

 MICROCHIP
 Daughter Card, DisplayPort FMC Daughter Card, FMC Daughter Card, MICROCHIP, VIDEO-DC-DP, VIDEO-DC-DP DisplayPort FMC Daughter Card

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.