

MICROTECH IP67 Long Jaw Digital Caliper



MICROTECH IP67 Long Jaw Digital Caliper User Manual

[Home](#) » [microtech](#) » MICROTECH IP67 Long Jaw Digital Caliper User Manual 

Contents

- [1 MICROTECH IP67 Long Jaw Digital Caliper](#)
- [2 SPECIFICATION](#)
- [3 BUTTON FUNCTIONS](#)
- [4 OPERATION INSTRUCTIONS](#)
- [5 BATTERY REPLACEMENT](#)
- [6 INDUSTRY 4.0 INSTRUMENTS](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)



MICROTECH IP67 Long Jaw Digital Caliper



SPECIFICATION


Item No	Range		Reso l	Jaw	Accu r.	Bar se ction	Weight	Prot ectio n	mm/i nch	Pres et	ABS	WIRE LESS
	mm	inch										
MICRON LONG JAW DIGITAL CALIPER IP67												
141073301	0-300	0-12"	0,001	100	±15	23×6	1.11	IP67	•	•	•	
141073501	0-500	0-20"		150	±20		1,45		•	•	•	
141073502							1,75		•	•	•	
141073601	0-600	0-24"		100			1,66		•	•	•	
141073702	0-1000	0-40"		150	±30	32×7	3,32		•	•	•	
LONG JAW DIGITAL CALIPER IP67												
141072311	0-300	0-12"	0,01	100	±30	17×5	0,69	IP67	•	•	•	
141072411	0-400	0-16"					0,79		•	•	•	
141072511	0-500	0-20"					0,88		•	•	•	
141073512	0-500	0-20"		150	±30	23×6	1,7	IP67 Al case	•	•	•	
141073515				300	±40		2,7		•	•	•	
141073611	0-600	0-24"		100	±30		1,7		•	•	•	
141073712	0-1000	0-40"		150	±40	32×7	3,3		•	•	•	
141073715				300	±60		5,7		•	•	•	
141073812	0-1500	0-60"		150	±50	42×8	5,2		•	•	•	
141073815				300	±70		7,1		•	•	•	
141073912	0-2000	0-80"		150	±60		53×8		7,1	•	•	•
141073915				300	±80	8,6			•	•	•	
141073255	0-2500	0-100'			±90		•		•	•		
141073305	0-3000	0-120'			±100		•		•	•		
141073405	0-4000	0-160'			±130		•		•	•		
141073505	0-5000	0-200'			±160		•		•	•		

BUTTON FUNCTIONS

SET – Functions setting: PRESET, LIMITS, UNITS, MIN/MAX

DATA – Favorite key to one of the most used function

0 – Setting 0, PRESET value

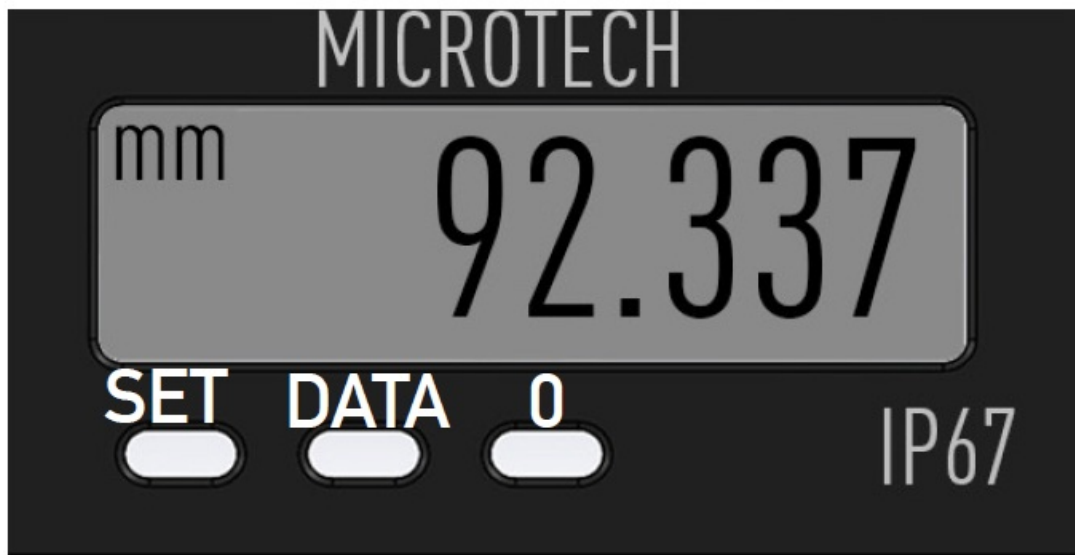

OPERATION INSTRUCTIONS

Wipe with a clean cloth, soaked in gasoline, measuring surface of the frame and gauge calipers to remove anti-corrosion oil. Then wipe them with a clean dry cloth.

If necessary, open the battery cover; insert the battery (type CR2032) according to the polarity of the electrodes.

This caliper has Autoswitch on/ off function:

- move electronic module for switch on caliper
- after 10 minutes without any moving caliper will switch off

During the measurement, measuring jaws should to sum to the measured object without knocking.

During the measurement avoid warps of measuring surfaces of the instrument. Measuring surface must be fully in contact with the measurement object


WARNING IN THE PROCESS OF WORKING WITH CALIPERS SHOULD BE AVOIDED:

Scratches on the measuring surfaces;

Measuring the size of object in the process of machining;

Shocks or dropping, avoid bending of rod or other surfaces.

BATTERY REPLACEMENT

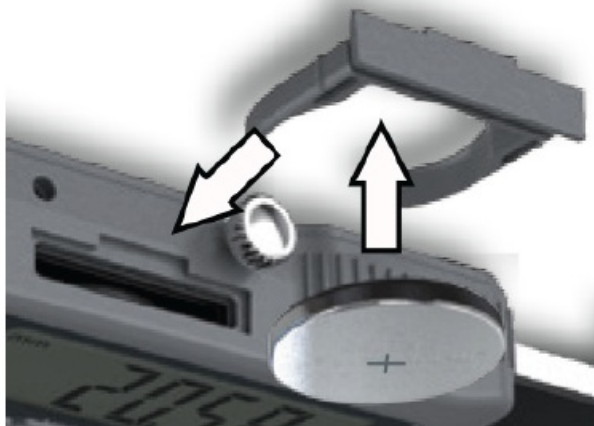

CR2032 BATTERY (3V)

INDUSTRY 4.0 INSTRUMENTS



MICROTECH

innovative measuring instruments
61001, Kharkiv, Ukraine, str. Rustaveli, 39
tel.: +38 (057) 739-03-50
www.microtech.ua
tool@microtech.ua

Documents / Resources

	MICROTECH IP67 Long Jaw Digital Caliper [pdf] User Manual 141073301, 141073501, 141073502, 141073, IP67 Long Jaw Digital Caliper, IP67, IP67 Digital Caliper, Long Jaw Digital Caliper, Digital Caliper, Caliper
---	--

References

- [User Manual](#)

Manuals+. [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.