



MiDiPLUS Studio S Pro OTG Memory Card Reader User Guide

[Home](#) » [Midiplus](#) » MiDiPLUS Studio S Pro OTG Memory Card Reader User Guide 

MiDiPLUS



Contents

- [1 Introduction](#)
 - [1.1 Features](#)
- [2 Hardware Features](#)
 - [2.1 Start Using](#)
 - [2.2 Connection Example](#)
- [3 Specifications](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Introduction


Thank you for choosing Studio S Pro OTG audio interface. Studio S Pro OTG is a 2 in 2 out USB audio interface,

with built-in OTG port and 3.5mm phone jack, providing you with a faster and more convenient live streaming experience. Two high quality microphone preamp and 24bit/192kHz high resolution sampling rate, support low-latency ASIO driver on Windows OS and will work straight away without needing to install any drivers on macOS. Please read this manual before you start using, to help you quickly understand the basic operations and features of Studio S Pro OTG.

Features


- 2 In / 2 Out USB audio interface with 24 bit/192 kHz audio resolution
- 1 XLR input with 48V phantom power supply and Input Gain control
- 1 Line/Hi-Z/MIC TRS input and Input Gain control
- 2 colors Input Level LED
- Independent monitor output volume and headphone volume control
- 2 Level Meters
- Zero latency Stereo/Mono Direct monitor
- Connect to your mobile phone through OTG or 3.5mm jack
- OTG input/output
- High Speed USB 2.0 and bus powered

Hardware Features

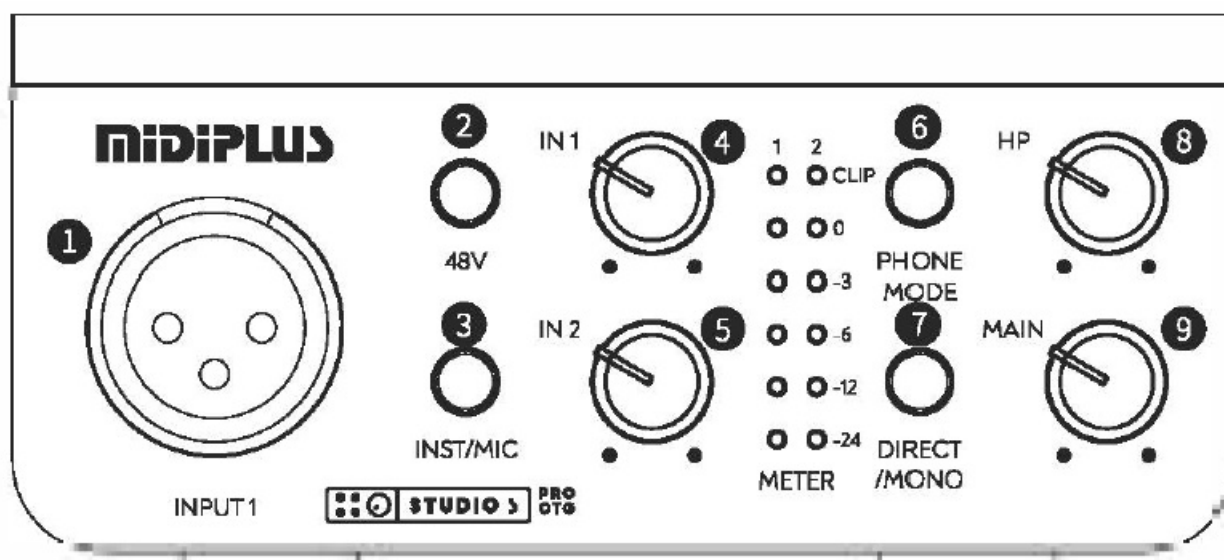

1. **INPUT** : Connect microphone via XLR 48V phantom power switch: Turn on 48V phantom power supply of input 1 channel
2. **INST/MIC input switch button**: Switch instrument/microphone/line input of 6.35mm input .Line in when the button light is off; instrument in when the button blue light is on ;microphone in when the button green light is on
3. **GAIN 1 control**: Adjust the gain level of input. Rotate counterclockwise to reduce the gain level and clockwise to increase the gain level
4. **GAIN 2 control**: Adjust the gain level of input2. Rotate counterclockwise to reduce the gain level and clockwise to increase the gain level
5. **OTG switch**: The button lights Yellow means both the OTG Input and Output are turned on

1. CDPress the switch, the button lights Red means turn on the route from mobile phone to OTG, press the switch twice to turn off the route
2. Long press the switch over 2 seconds, the button tights Green means turn on the route from OTG to mobile phone, long press the switch again to turn off the route
6. **Direct monitoring mode Switch:** Stereo direct monitoring when the button lights blue, and Mono direct monitoring when the button lights green, when the button lights off means Direct monitoring is turned off
7. **Headphone output level control:** Adjust the headphone output level, rotate counterclockwise to reduce the level, and rotate clockwise to increase the level, and the knob light is the USB status LED
8. **Main output level control:** Adjust the monitor outputs level. Rotate counterclockwise to reduce the level and clockwise to increase the level

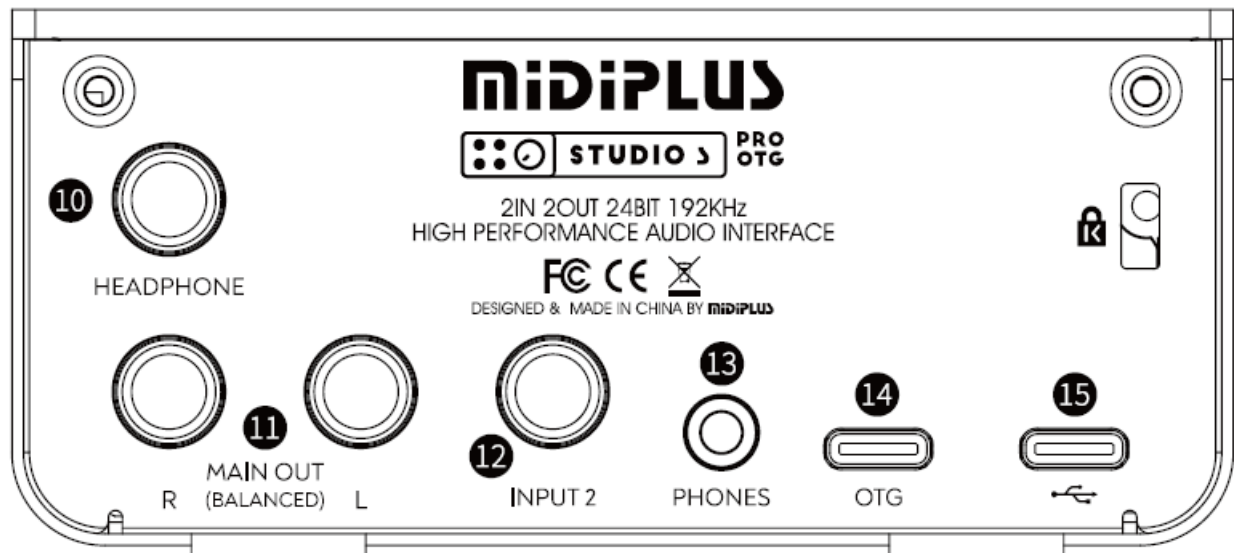

9. Headphone output: 6.35mm stereo output, connect to your headphone
10. Main output: Connect to your monitor
11. INPUT2:6.35mm mono input, connect to your line in/ instrument/microphone
12. 3.5mm Phone jack: Connect to your mobile phone via the 3.5 TRRS cable
13. Type-C OTG port: Connect to your mobile phone via the Type-C cable
14. USB port: Connect to your computer

Start Using

1. Connect

Connect the Studio S Pro OTG to computer by using the included USB A to USBC cable, the USB status LED on Headphone knob will light on.


2. Installation

Windows: Go to <http://midiplus.com/cn/support.aspx?id=1> download and install the latest driver. macOS: No need to install any drivers.

3. Setting the default sound device

Windows: Go to Settings> System> Sound and then selecting the Studio S Pro OTG as your device for Input and Output. macOS: Go to System Preferences> Sound and then selecting the Studio S Pro OTG as your device for Input and Output.


Connection Example

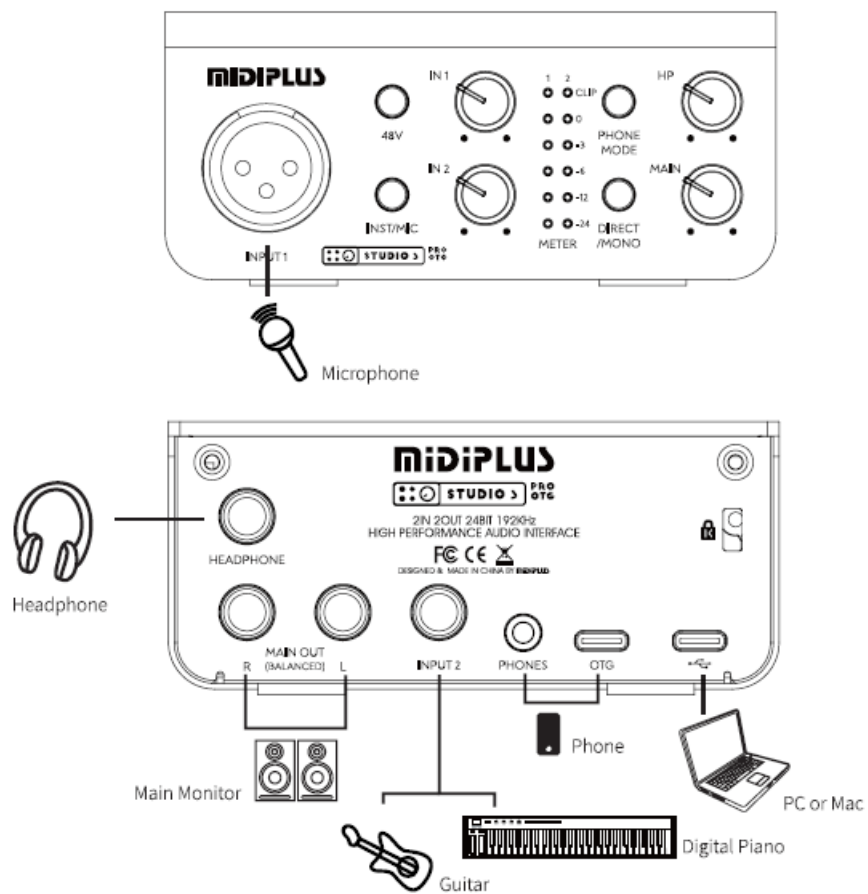

Specifications

Model	Studio S Pro OTG
Bit depth/Sample rate	24 bit/192 kHz
I/O	1x XLR Input 1 x 1/4" Headphone Output 2 x 1/4" Monitor Outputs 1x 1/4" Input 1 x 1/8" Phone jack 1 x OTG port 1 x USB port
Buttons	1 x 48V Switch 1 x Hi-Z/mic Switch 1 x OTG Switch 1 x Direct Monitor mode Switch
Knobs	2 x Input Gain control 1 x Monitor level control 1 x Headphone Volume control
Dimensions	116mm*105mm*46mm
Accessories	1 x USB Cable, 1 x Quick Start Guide 1 x 1/4" to 1/8" adapter 1 x Information paper 1 x 1/8" to 1/8" TRRS cable

Documents / Resources

<p>Studio S Pro OTG Quick start guide</p> <p>Introduction</p> <p>Thank you for purchasing Studio S Pro OTG. This is a portable, high-quality, professional-grade audio interface. It is designed to provide you with the best possible audio quality for your recordings. The Studio S Pro OTG is a compact, lightweight, and easy-to-use device that can be used with a variety of audio equipment. It is compatible with both Windows and Mac operating systems. The Studio S Pro OTG is a versatile device that can be used for a variety of applications, including recording, mixing, and monitoring. It is a great choice for anyone who is looking for a portable, high-quality audio interface.</p> <p>Features</p> <ul style="list-style-type: none"> • 24-bit/192kHz sampling rate • 1x XLR input with phantom power • 1x 1/4" input • 1x 1/8" input • 1x 1/4" output • 1x 1/8" output • 1x USB port • 1x 48V switch • 1x Hi-Z/mic switch • 1x OTG switch • 1x Direct Monitor mode switch • 1x Headphone volume control • 1x Input gain control • 1x Monitor level control • 1x USB cable • 1x Quick start guide • 1x 1/4" to 1/8" adapter • 1x Information paper • 1x 1/8" to 1/8" TRRS cable <p>Hardware Features</p> 	<p>MiDiPLUS Studio S Pro OTG Memory Card Reader [pdf] User Guide</p> <p>Studio S Pro OTG Memory Card Reader, Studio S Pro OTG, Memory Card Reader, Card Reader, Reader</p>
---	--