

MIDLAND BT Mini Comunication System Single Pack Installation Guide

Home » MIDLAND » MIDLAND BT Mini Comunication System Single Pack Installation Guide 🖺





MIDLAND BT INSTALLATION

MIDLAND BT INSTALLATION

Contents


- 1 MOUNTS
- 2 ΜΙΚΡΟΦΩΝΑ
- **3 SPEAKERS**
- 4 ATTACH/DETACH
- 5 Documents /

Resources


6 Related Posts

MOUNTS


Place the MIDLAND BT on the left side of your helmet using the adhesive mount or the screw mount.

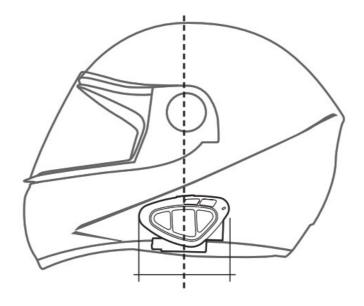

Adhesive mount clean surface before apply

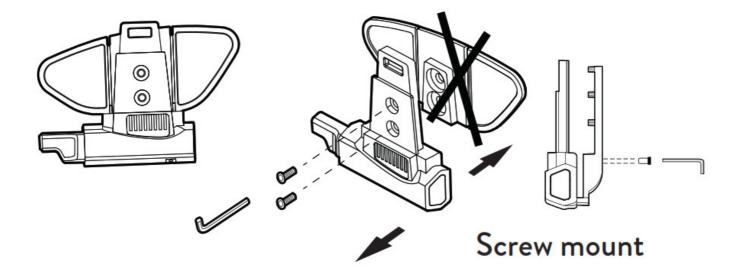

ΜΙΚΡΟΦΩΝΑ

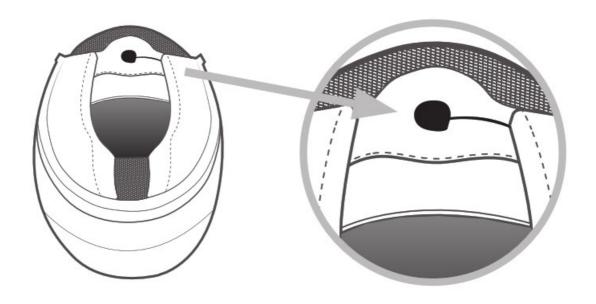

Full face helmets: place the wired microphone in front of your mouth.


Modular/jet helmets: fix the boom mike on the left side and keep the sponge as closely as possible to your mouth

(white symbol in front of your mouth).

Attention: for jet helmets, it is also available a specific ext. boom microphone (optional, cod. C1253).

SPEAKERS


The position of the speakers is the most important point of the installation process.

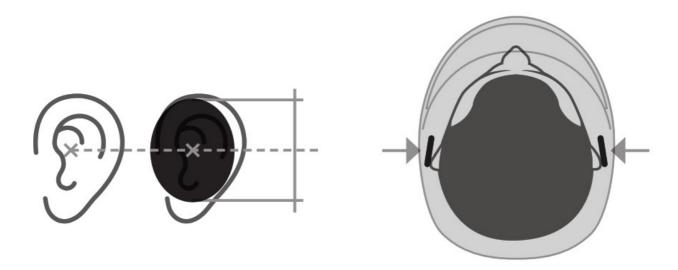


Caution: for the best sound clarity, it is very important to place the speakers in line with the center of your ears and as close as possible (the speakers should reach almost to your ears). If necessary, use the supplied dividers to better fit the speakers in your ears. The recesses of the speakers designed in the helmets are not always placed in the best location for you. Be sure to adjust the speakers as indicated above.

ATTACH/DETACH

The **MIDLAND BT** can be easily fitted onto the helmet by sliding it downwards into the slot of the adhesive Mount. To detach **MIDLAND BT**, simply press the fixing clip (A) and push the unit upwards.





Documents / Resources



MIDLAND BT Mini Comunication System Single Pack [pdf] Installation Guide BT Mini Comunication System Single Pack

Manuals+,