




MikeWin SCL24W Smart Light User Manual

[Home](#) » [MikeWin](#) » MikeWin SCL24W Smart Light User Manual 

MikeWin SCL24W Smart Light User Manual



THANK YOU for your choice To optimize user experience, please install and use the light according to the following instruction.



Warning

1. This product cannot be connected to a dimmer, otherwise it will not work properly
2. This product is not allowed to be used in a sealed environment, otherwise it will affect its signal and service life.
3. This product uses Bluetooth signal control, and metal or obstacles will affect the control distance.
4. The mobile phone can be connected to control 2-4 lamps at the same time, and the control distance is within

the range of 8-10m.


Contents

- [1 Specification](#)
- [2 Components](#)
- [3 Dimension](#)
- [4 Installation](#)
- [5 Explained and step-by-step PPA](#)
- [6 Group Control](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

Specification

Model No.	FTF-020-WN-C38-K1-ee-fff
Wattage	20W/25W/30W
Pack	1/2/4 Pack
Color	RGBCW
Input Voltage	AC100-240V
Waterproof	IP66
Controlled By	Bluetooth
Frequency	50/60Hz
Mercury Content	No
Lifespan	50000H
Working Temperature	-25"-40°C

Components

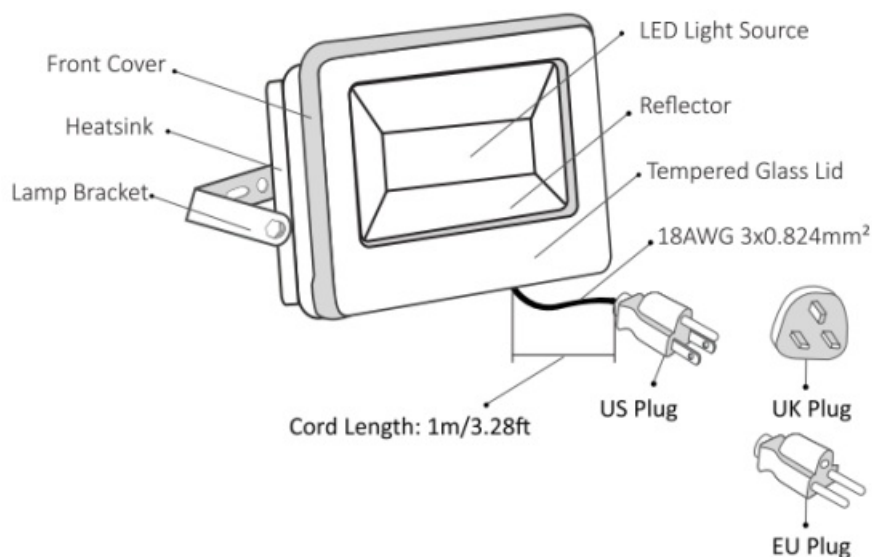


Note:

1. Different plugs for different countries.
2. Cord – type Z attachment.

For type Z attachment, if the external cord of this luminaire is damaged, it cannot be replaced without breaking or destroying the luminaire.

Dimension

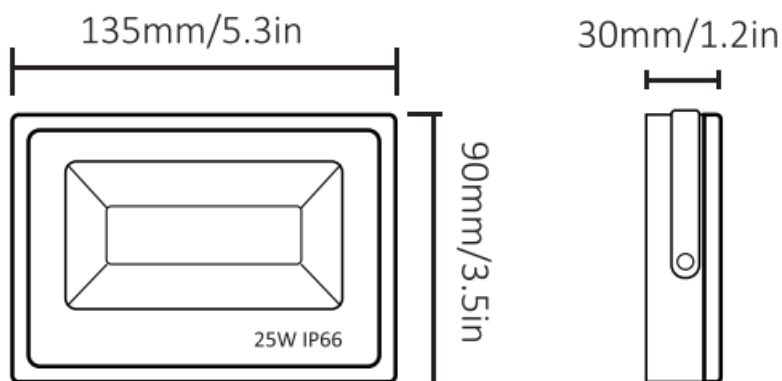


Weight: 1.1lb/0.5kg

Max Projected Area: 20m²


Suggested Height for Installation: 5m

Installation


Step A: According to the spacing of two screw bits on the bracket, drill two holes on the mounting panel.

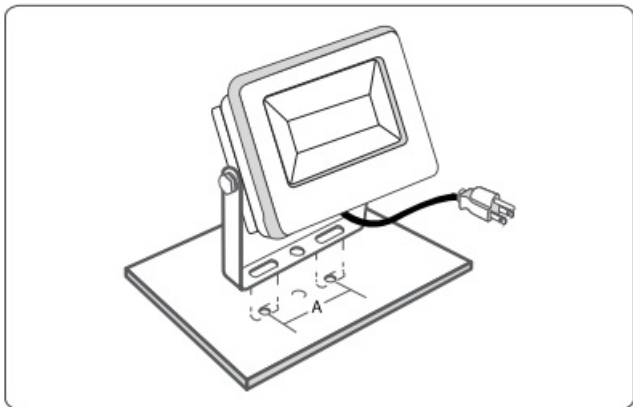


Step B: Aim the bracket at the holes and fix it with two bolts.

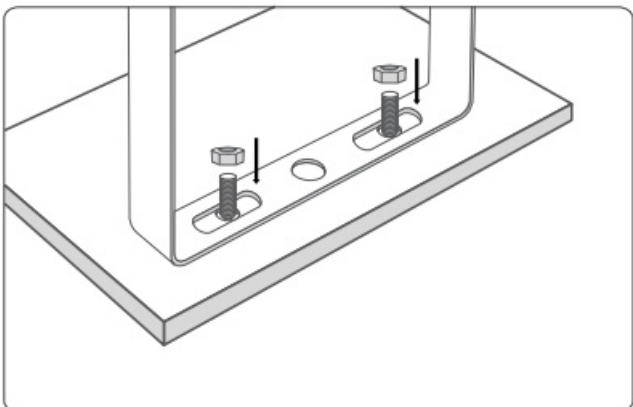

Step C: Adjust the lighting direction up or down as per your need and plug in to power the light on.

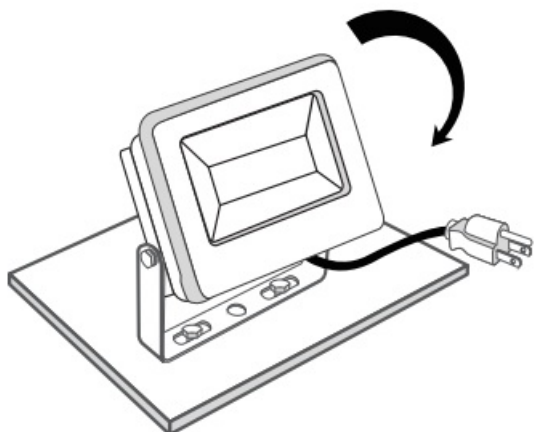

Note:



Make sure that the distance between the light and the object being lit is more than 1 meter, so as to avoid high temperature caused by short distance.


Non-replaceable Light Source.

Limitation of Indoor and Outdoor Use


1. This light is waterproof and dampproof. It is protected against the rain, but it cannot be immersed in water.
2. The mounting position of this light should be able to bear at least 10 times as heavy as the light.
3. This light should be used in condition that is good for heat dissipation. Its working temperature should be less than 40°C. Too high the working temperature will cause serious lumen depression and affect lifespan of the light.

Explained and step-by-step PPA


Choose to add fixtures →

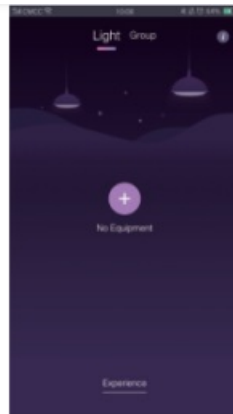


Waiting for connection →

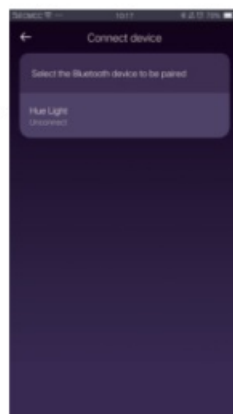


Click return after successful connection →

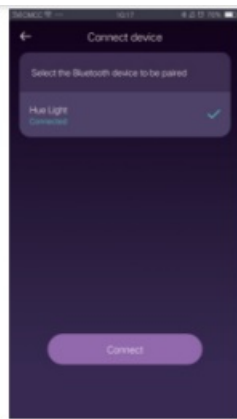

Successful connection display →

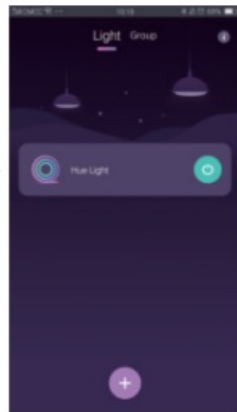


Dimmable: Color temperature and brightness adjustment

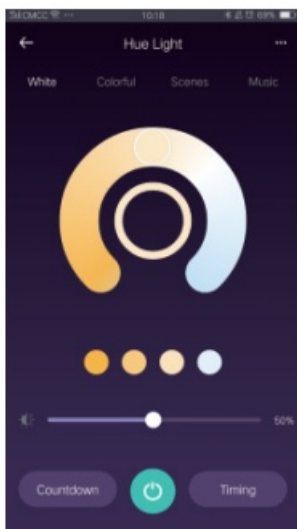


RGB Mode: Choose the color you like




Scene Mode: Choose the scene to meet your need

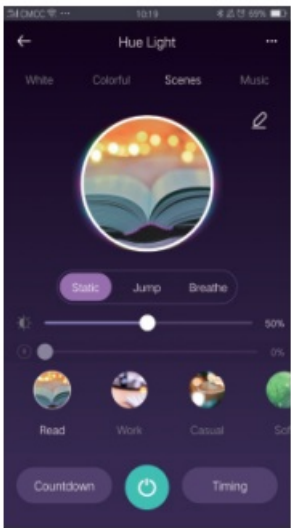

Music Mode

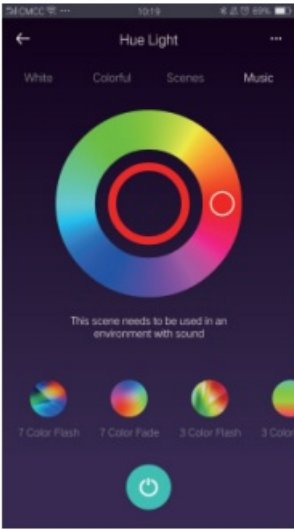

Group Control

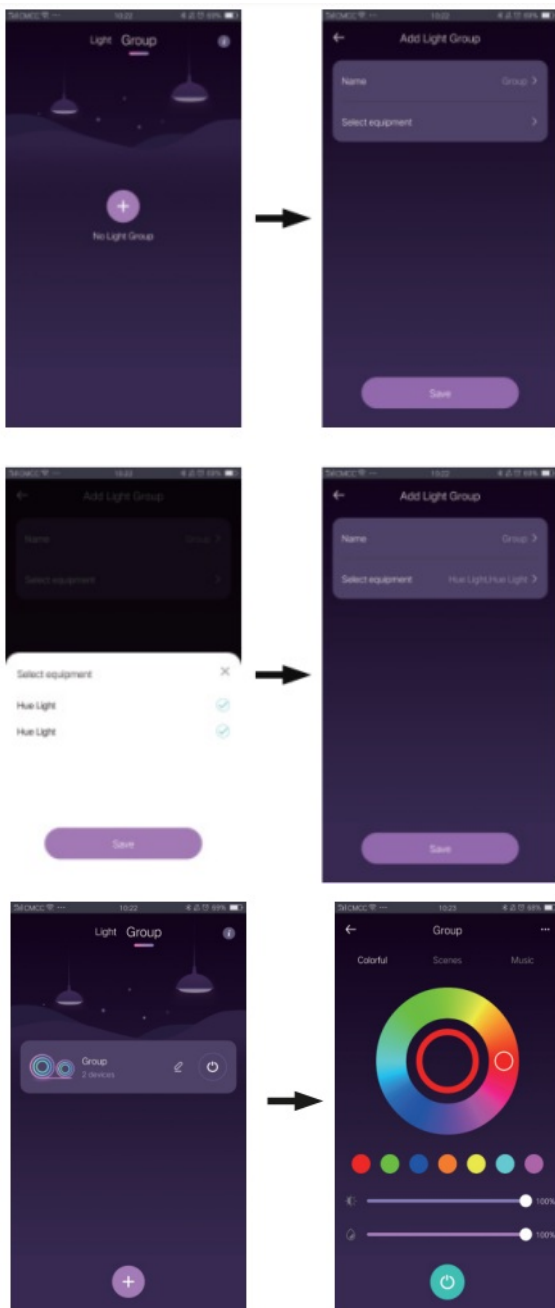

What if the app can't control the lamps?

1. Please turn off the Bluetooth of the mobile phone and turn it on again
2. Please turn on the lamp again and try to be as close as possible to the lamp.

Why is the connection status displayed on the APP but the lights can not be controlled?

1. Please try to be close to the lamp.
2. 4 lights are the best for APP group control, too many lights may cause lag and cannot be controlled normally


Why is the lamp connection unsuccessful?

1. Re-download the app and re-install.
2. Please try using another mobile phone.


Scan Installation



Search for“Shine Light” download



Manufacturer: SHENZHEN BLING LIGHTING TECHNOLOGIES CO.,LTD Address: 3rd Floor, Bldg A, China National Nuclear Corporation Industrial Park,Qiyu Rd, East of Baishixia, Fuyong Bad an Dist Shenzhen Guangdong 518103 China



MADE IN CHINA

Documents / Resources

	MikeWin SCL24W Smart Light [pdf] User Manual SCL24W Smart Light, SCL24W, Smart Light
---	---