

MIOFIVE S1 Pro Dash Camera User Manual

Home » MIOFIVE » MIOFIVE S1 Pro Dash Camera User Manual



Please read this manual before operating your device and keep it for future reference.



Distractions can lead to accidents and the risk of injury or death. Always keep your eyes on the road, and keep aware of your surroundings.

www.miofive.com



Contents

- 1 What's in the box
- **2 Product Diagram**
- 3 Installation
- **4 Control Menu**
- **5 Features**
- **6 Troubleshooting**
- **7 Specifications**
- **8 FCC STATEMENT**
- **9 Community Promotion**

Program

- 10 Documents / Resources
 - 10.1 References

What's in the box



Miofive S1 Dash Cam x 1



Car Charger x 1



Charging Cable x 1



Crowbar x 1



Data Cable x 1



Static Sticker x 2




3M Adhesive x 1




User Manual x 1

Product Diagram

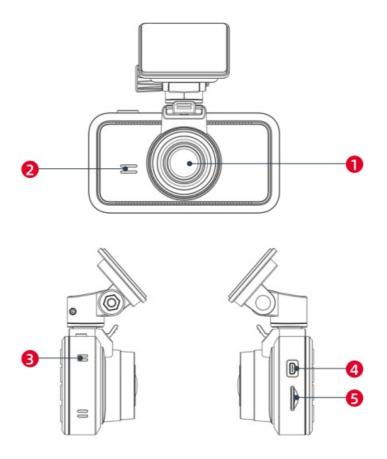



- 1. Camera Lens
- 2. speaker
- 3. vents
- 4. Mini-USB Connector
- 5. Memory Card Slot

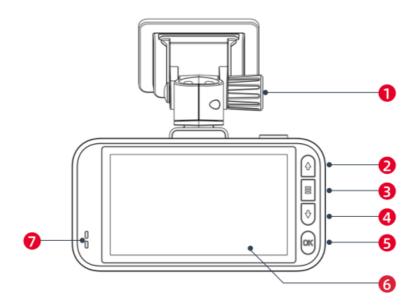

- 1. Adjustment Bolt
- 2. Album/Previous Button
- 3. setting/Back Button
- 4. Emergency Video/Next Button
- 5. OK (Confirm) Button screen

6. Status Indicator LED



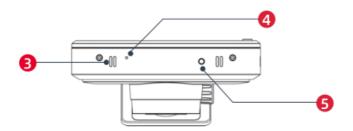


- 1. Power Port
- 2. Power Button
- 3. vents
- 4. Microphone
- 5. Reset

Rear Camera (optional)

Available only for specific models and can be purchased separately.

Please note that the rear cam cannot operate independently and requires pairing with the Miofive 51 dash cam.

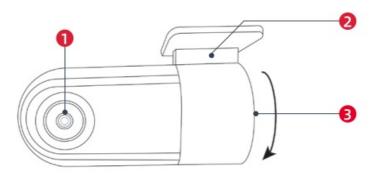

- 1. Rear Camera Lens
- 2. Brackets (Rotatable support)
- 3. Power Port

Miofive MicroSD Card

You must insert a memory card (not supplied) before you can start recording. The dash cam supports the Class 1 O memory cards with 64GB – 512 GB capacity. You should use separate MicroSD cards for recording and regular data storage.


Note

Miofive 51 Dash Cam is High Bit-Rate 4K Video recording device, which requires High Speed Rating SPECIFIC MicroSD Cards.

Miofive does not guarantee compatibility with memory cards from all manufacturers. We recommend using our Miofive branded SD cards, available on Miofive.com and Amazon.

Our SD cards are optimized for perfect compatibility with our 51 dash cam and come with an 1 a-month Hassle-Free Warranty for ensured quality.






Warning

Absolutely do NOT buy Sandisk Cards. Do NOT Purchase it from third party seller on eBay or any online place. Otherwise, they may be fake cards and will NOT work.

Inserting/Removing the MicroSD Card

Locate the microSO card slot on your device and insert the memory card until it securely clicks into place.

To remove the microSD card, gently press its edge inward until it clicks and pops out. Then, simply pull it out of the slot.

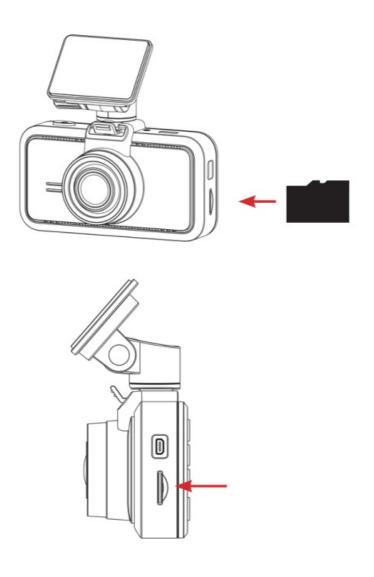

Note

- 1. Do not insert/remove the microSD card while the camera is turned ON.
- 2. Before you start recording, please format the microSD card to avoid malfunction caused by files not created by the dash cam.
- 3. Turn the device off before removing the memory card.

Formatting the MicroSD Card


To format the microSD card, navigate to Settings > More settings > Format Built-in Storage> YES.

Note

Please be aware that formatting the microSD card will erase all existing data. Ensure that you have backed up important files before proceeding with the formatting process.

CPL Filter


The Miofive Dash Cam CPL (Circular Polarizing Lens) enhances your driving recordings by reducing glare on the windscreen, ensuring clear footage of the road. It protects the front camera lens from fingerprints and scratches, while also improving color and contrast levels.



Installation

Install the electrostatic sticker

Park your car in a safe area, and turn off the car engine. Take out the electrostatic sticker from the packing box and install it in the recommended area on the windshield, as shown in the figure below. Please clean the windshield and remove the air bubbles between the electrostatic sticker and the windshield during the installation.

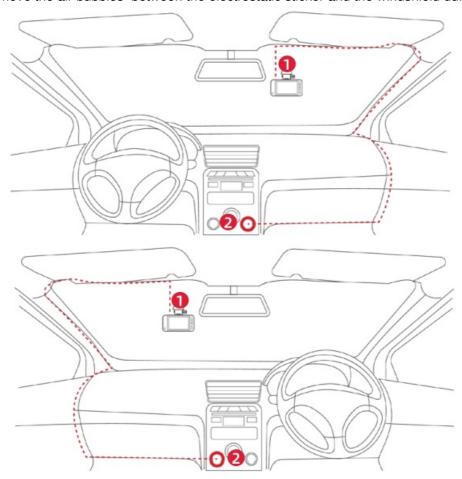

Note

Please DO NOT attach the dash cam with the sticker to the windshield before the camera calibration to ensure the Al feature works properly.

Connect the power supply

Connect the USB cable to the USB Type-C port of the @ Dash Cam.

Run the cable along the edge of the windshield, tucking it away in the seams (With the Crowbar), and extend it all

the way to the USB port of the al Car Charger. Be sure to keep it away from the airbag area. Insert the al Car Charger into your cigarette lighter, and connect the Dash Cam to the Car Charger.

Note

Please securely position the car charging cable inside the vehicle.

Follow the instructions in the provided diagram to avoid any disruption to the GPS device within the bracket.






Camera Calibration

You need to find a good position and angle to install the dash cam.

Start the car engine (DO NOT install under driving) to power on and start from pressing the Setting Button in the middle on the right side, find System Settings → Al → Camera Calibration. Align vertical line to the center, horizontal line to the vanishing point of the road in the preview LCD screen as shown below. Make sure the dash cam does not interfere with the driver's view.


Note

The Al accuracy is dramatically affected by the position of installa tion. Please install carefully.





The vanishing point of the road is in the button of the image.




The camera is tilted.



The engine cover occupy too much area in the image.

Attach the Dash Cam

Remove the protective sticker on the Dash Cam bracket and attach the Dash Cam to the center of the electrostatic sticker (the sweet spot in step 3), as shown in the figure below. Press the bracket mount by hand to ensure that the heat resistant adhesive is in close contact with the electrostatic sticker. Lock the bracket to the Dash Cam. You will hear a snap when it is in place.



Check and adjust the dash cam angle

Ensure your dash cam is installed as the right angle in step 3. You may adjust the camera angle up or down against the preview screen to ensure that the camera is facing correctly.



Mount Attachment

To attach the mount, align the pins on the mount with the holes on the adhesive attachment and slide firmly down until you hear the pieces click into place. To remove the top, do the reverse, and slide it up until you can lift it off the mounting pins.






Scan the QR code below to obtain the operation guide.




Rear Camera Installation

Select an installation location where the camera can record the complete rear view. Wipe clean the installation surface of the wind screen with a dry cloth. Peel the protection film on the sticky pad and camera lens. Then fix the rear camera on the selected location. Mount the rear camera as shown below. Use the included rear camera cable to connect the rear camera to the front camera.

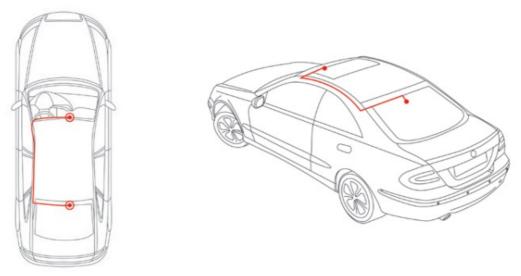

Hiding the Cable

Make sure the hanging cable does not obstruct your view out of your rear window. Ensure that there are no kinks in the cable as you are stowing it. If necessary, use the crowbar bar supplied with your Dash Cam; this can be used to help pry open the lining of your car (see illustration below).

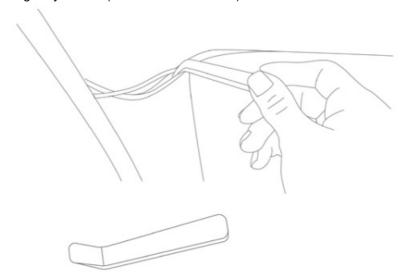

Miofive Dash Cam App Download

Please scan the QR code below or search [Miofive] in App Store or Google Play to download the App.



http://www.miofive.com/miofive_app_download/miofive_app_download.html

Note

In order to connect to Dash Cam Wi-Fi, please list the APP in youtrust application list and make sure the Dash Cam Wi-Fi is on.

Systems Supported:

Android 5.0 and above/ iOS 11.0 and above

Using Your Miofive APP

This section provides guidance on how to connect your smartphone to the dash cam. We recommend registering an account to unlock advanced features.


Bluetooth Connection:

1. Open the app and go to "Devices."



- 2. Choose your device model.
- 3. Press and hold the OK button on the right side of the dash cam for 5 seconds; this will show a QR Code on the screen.
- 4. In the app, click "Start Scanning" to activate scanning mode.

Use your phone to scan the QR Code on the dash cam to connect.

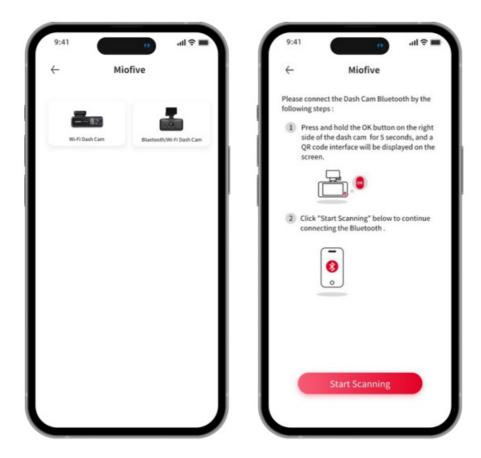

Note

If the connection fails, please retry the connection. If issues persist, consider using Wi-Fi for the connection.

Wi-Fi Connection:

- 1. Check the indicator status on the dash cam, and make sure the power indicator solid on blue.
- 2. Make sure your phone and dash cam are in close range (within 2 meters).
- 3. Go to Phone Wi-Fi Setting and turn Wi-Fi on.
- 4. Choose your Miofive network name (SSID) from the Wi-Fi network list.
- 5. input the password to connect.(ex. "Miofive_xxxx", default password: 7 234567890)

 Return to Miofive APP once the connection is complete.

LED Indicator Information

LED Indicator	Dash Cam Status
Blue LED light solid on	Working, loop recording
Blue LED light blinks	Stop recording, user operating
Blue and red alternating flashes	MicroSD card abnormal
Red LED light solid on	Emergency recording
Red LED light blinks	Firmware updating

Control Menu

By pressing the button on the right side of the LCD panel, you could enter the control menu.



By pressing this button \$\psi\$, the current video clip will be locked and stored in EMER Video.



- 1. Rear cam connected
- 2. Time-lapse Recording Setting: Enable
- 3. Power by Hardwire Kit
- 4. Front cam recording with 4K resolution
- 5. GPs signal detected
- 6. Parking Monitoring Setting: Enable
- 7. Bluetooth On
- 8. Wi-Fi On
- 9. Microphone On



- 1. Rear cam connected
- 2. Time-lapse Recording Setting: Enable
- 3. Power by USB cable
- 4. Front cam recording with 2K resolution
- 5. GPS signal detected
- 6. Parking Monitoring Setting: Enable
- 7. A mobile phone connects to the dashcam via Bluetooth
- 8. A mobile phone connects to the dashcam via Wi-Fi
- 9. Microphone On



- 1. Rear cam disconnected
- 2. Time-lapse Recording Setting: Disable
- 3. Power cable disconnected
- 4. Front cam recording with HD (1080P) resolution
- 5. No GPS signal
- 6. Parking Monitoring Setting: Disable
- 7. Bluetooth Off

- 8. Wi-Fi Off
- 9. Microphone off

Features

Note

Not all features are listed in this manual.

Parking Mode

When your car is not running, i.e. the engine is turned off, the Dash Cam will automatically power off in 10 seconds and enter the Park ing Mode. When a shock or crash is detected, the G-Sensor will acti vate the Dash Cam and start recording a 60-second video. The Dash Cam will then reenter the Parking Mode.

Time Lapse

Time Lapse recording is a technique whereby the frequency at which file frames are captured (frame rate) is lower than that used when playing back the recording. Time Lapse recording can be considered the opposite of slow motion, as when there cording is played back time appears to be moving faster. This feature operates for up to 24 hours after the ignition is turned off.

Note

Use of this function requires a Miofive USB Type-C hardwire kit (NOT included) to provide a constant power supply.

Emergency Recordings

A 60-second video will be captured when the G-Sensor is activated in case of sharp turns or a sudden stop. When the capacity of these videos reaches 30% of the SD card space, the oldest ones will be overwritten by the new ones.

Travel Log

Travel Log records the driving path of your journey. Your video and photo will store the GPS information and show the geography in your album. Your journey could be stored in your personal account in the cloud.

Note

No personal data is collected. All GPS log data is stored anonymously in the US Amazon Web Service.

Accessories - Hardwire Kit

Miofive USB Type-C Hardwire Kit is NOT Included in the packaging.

Purchase separately.

The Miofive Hardwire Kit supplies power to your car recorder when the engine is switched off by connecting the car recorder cable to the car battery.

Firmware/ APP Update

APP Update

Once there is a new App version released, your mobile system and the App will send an update notification. Follow the prompts to up date it.

Firmware Update

Firmware update can be achieved through OTA (Over The Air) Open App – Connect To Dash Cam – Enter Settings – Firmware Up date, then follow the prompt to upgrade.

Note

DO NOT power off the Dash Cam during the update. The Dash Cam will restart automatically after the firmware is successfully updated. Please contact us immediately if the update fails.

Troubleshooting

Scenario	Malfunction symptom	Root cause/Solution
Installation	Image blur	Make sure the lens pro- tector is removed. The windshield might reflect, slightly adjust the camera angle to avoid reflection.
	Day and night image quality diffe rs a lot	Normally the window film's transparency rate is between 68%~80%, it will affect the recording results.
	Power disconnect frequently	Due to different car models, please adjust the car charger angle to avoid loosing position.
	The rear cam is not working 1. The rear cable is not properly ease check all the cable connect make them tight. 2. If there is a fault in the rear callease contact us.	
Connecting to PC	Cannot find external storage	Please use a USB cable that supports data tr ans mission (The charging cable in the box does NOT support data transmission).

Start up	Unable to start	1. Make sure the car cha- rger indicator light i s on, if not please reinstall the car charger. 2. The built-in battery might be low, please co n- nect the USB cable to a power souce. 3. Press the power button for 8 secs to shut d own. After shut down, press the power button to reboot.
	Welcome screen stops, screen b lack out, button does not work	Press the power button for 8 secs to shutting down. After shut down, press the power butto n to reboot.
Recording	Did not start recording automatic ally after start up	Reboot the dash cam. Format your SD card from within the Dash Cam setup menu.
	Stops recording abnormally	Format your SD card from within the Dash Ca m setup menu.
	LCD screen black out	If "LCD Auto-Off" is on, the camera will enter p ower saving mode if no operation been perfor med for 30 or 60 secs (default). The LCD scre en will turn on again after pressing any button
	Video recorded is blur	Make sure the lens protector is removed. Make sure the windshie- ld or camera lens i s clean.

	No sound is recorded in the vide o	 Check if the "Microp- hone" is Off in the Re co- rding settings (The icon on the right upper LCD screen shows mute). Turn the "Microphone" On in the "Recording settings".
	Video time stamp incorrect	 Use the APP to connect the dash cam, the dash cam will perform auto time calibration once connected to the APP. Manually set the "Date and Time"under "System Settings".
	Stops recording abnormally	Format your SD card from within the Dash Ca m set- up menu.
Connecting to the App	Cannot connect to dash cam via Bluetooth	Check Bluetooth Range and Enablement: Ensure that your mobile device is within a rea sonable range of the dashcam(within 2 meter s). Confirm that Bluetooth is turned on in both your mobile device and the dashcam. Restart Connection: If the problem persists, attempt to restart the Bluetooth connection. Reset your dashcam by pressing the reset but ton located on the bottom of the device. Additionally, turn off Bluetooth on your mobile device, then turn it back on, and try reconnecting.

	No sound is recorded in the vide o	1. Check if the "Microp- hone" is Off in the Re co- rding settings (The icon on the right upper LCD screen shows mute). 2. Turn the "Microphone" On in the "Recording settings".
	Video time stamp incorrect	1. Use the APP to connect the dash cam, the dash cam will perform auto time calibration once connected to the APP. 2. Manually set the "Date and Time"under "System Settings".
	Stops recording abnormally	Format your SD card from within the Dash Ca m set- up menu.
Connecting to the App	Cannot connect to dash cam via Bluetooth	1. Check Bluetooth Range and Enablement: Ensure that your mobile device is within a rea sonable range of the dashcam(within 2 meter s). Confirm that Bluetooth is turned on in both your mobile device and the dashcam. 2. Restart Connection: If the problem persists, attempt to restart the Bluetooth connection. Reset your dashcam by pressing the reset but ton located on the bottom of the device. Additionally, turn off Bluetooth on your mobile device, then turn it back on, and try reconnecting.

	No sound is recorded in the vide o	1. Check if the "Microp- hone" is Off in the Re co- rding settings (The icon on the right upper LCD screen shows mute). 2. Turn the "Microphone" On in the "Recording settings".
	Video time stamp incorrect	Use the APP to connect the dash cam, the dash cam will perform auto time calibration once connected to the APP. Manually set the "Date and Time"under "System Settings".
	Stops recording abnormally	Format your SD card from within the Dash Ca m set- up menu.
Connecting to the App	Cannot connect to dash cam via Bluetooth	1. Check Bluetooth Range and Enablement: Ensure that your mobile device is within a rea sonable range of the dashcam(within 2 meter s). Confirm that Bluetooth is turned on in both your mobile device and the dashcam. 2. Restart Connection: If the problem persists, attempt to restart the Bluetooth connection. Reset your dashcam by pressing the reset but ton located on the bottom of the device. Additionally, turn off Bluetooth on your mobile device, then turn it back on, and try reconnecting.

Specifications

Image Resolution	Front – 4K UHD (3840×2160) @30fps Rear(optional) – 2K QHD (2560×1440) @30fps
CPU	Novatek processor
Camera	Front – FOV 140,F1.8 Rear(optional) – FOV 115,F2.0
Screen	3-inch TFT LCD
WiFi	Wi-Fi 2.4 / 5GHz
Bluetooth	4.2
Storage	Up to 512G Class 10, loop recording
GPS	Built-in GPS
G-SENSOR	Built-in 3 Gyro sensor, motion locking, adjustable sensitivity
Power supply	Super capacitor
Power Input	5V / 2.4A
Dimension	Front – 95 x 54 x 48 mm Rear(optional) – 63 x 34.5 x 25 mm
Weight	Front – 151g Rear(optional) – 36g
Operating Temperature	-10°C~45°C / 14°F~113°F

Precautions

Warning

Do not expose this product to rain, moisture or water under any circumstances, doing so may result in the risk of electric shock or fire.

Important Notices

Please read all precautions, cautions and instructions carefully be fore using this product to ensure proper and safe usage.

CAUTION:

To reduce the risk of electric shock, do not perform any servicing other than that contained in the instruction manual unless you are qualified to do so. Have the unit serviced by a qualified service technician if;

The unit has been exposed to rain or water.

The unit does not seem to operate normally.

The unit exhibits a marked change in performance.

Disposal of your Miofive dash cam

- 1. All electrical and electronic products should be disposed of sep arately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities. Con tact local authorities to learn about disposal and recycling options available in your area.
- 2. The correct disposal of your Miofive dash cam will help prevent potential negative consequences for the environment and human health.

3. For more detailed information about disposal of your Miofive dash cam, please contact your city office, waste disposal service or the shop where you purchased the product.

Product Compliance Information

IC

Hereby, Miofive declares that the radio equipment Miofive Dash Cam is in compliance with Industry Canada licence-exempt RSS stan dard(s).

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- 1. This device may not cause interference,
- 2. This device must accept any interference, including interfer encethat may cause undesired operation of the device.

Hereby, Miofive declares that the radio equipment Miofive Dash 0Cam is in compliance with Directive 2014/53/EU. RF Exposure Information (MPE)

This device meets the EU requirements and the International Commission on Non-Ionising Radiation Protection (ICNIRP) on the limitation of exposure of the general public to electromagnetic fields by way of health protection. To comply with the RF exposure requirements, this equipment must be operated in a minimum of 20 cm separation distance to the user.

WEEE

This product must not be disposed of as normal household waste, in accordance with the EU directive for waste electrical and electronic equipment (WEEE – 2012/19/EU). Instead, it should be disposed of by returning it to the point of sale, or to a municipal recycling collection point.

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- This device must accept any interference received, including in terference that may cause undesired operation.Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment & receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Regulatory Certification

The Identifier is available as an E-label within your Dash Cam's Sys tem Info pages. To view these Information please follow the steps below: Click About> Select Legal & Regulatory> Show Regulatory Certification > Browse by Click Next.

Customer Service

Lifetime Support

18-month Limited Warranty

E-mail: support@miofive.com

If you are having difficulties setting it up, please email us at support@miofive.com.

99% of all setup problems can easily be resolved and should be able to get you up and running in no time.

PLEASE see up to date information by viewing our website. OR you can follow us on Facebook & Twitter. We frequently update many great contents that are very useful to you on it.



Community Promotion Program

Miofive has a Community Promotion Program to aid you in extend ing the warranty by 6 months. Please join Miofive Community (Scan the QR Code below) and share videos caught on the Miofive dash cam to extend your warranty pe riod from 18 months to 24 months.



https://www.facebook.com/groups/596841488545431/?ref=share

If you have any thoughts on how we can do better, please feel free to share them with us in this group. We always humbly listen and focus on doing our best to provide the best product and service for you. Let's enjoy your driving adventure together!



www.miofive.com

Documents / Resources



MIOFIVE S1 Pro Dash Camera [pdf] User Manual S1 Pro Dash Camera, S1, Pro Dash Camera, Dash Camera, Camera

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.