Moc APEX TWS Earbuds MT191 Manual

Moc APEX TWS Earbuds MT191 Manual
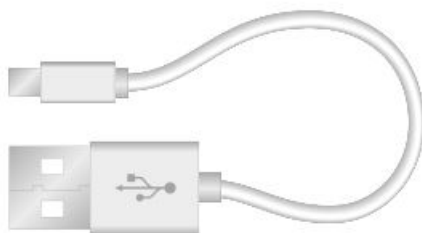
Contents

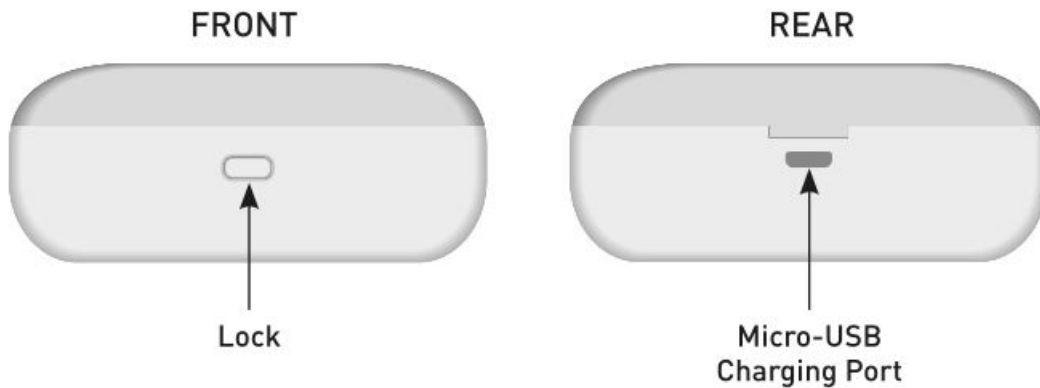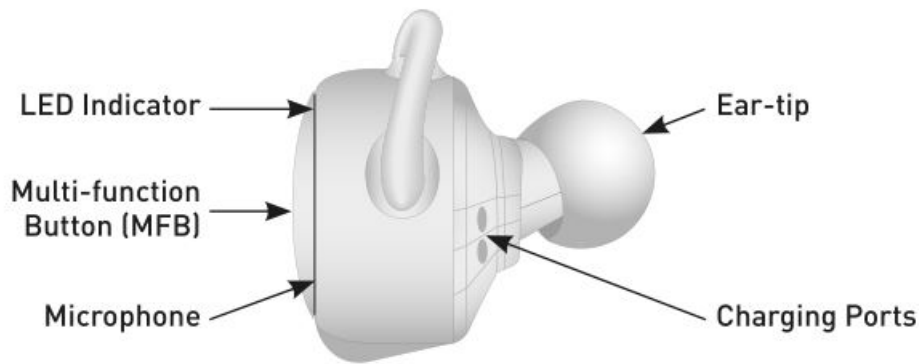## CONTENTS

Charging Case

2 Earbuds

Charging Cable

3 pair of ear-tips

- 2x MT191 Wireless Earbuds
- 1x MT191 Charging Box
- 1x USB-A to Micro-USB Charging Cable
- 3x pair of Ear-tips in sizes S, M, L

OVERVIEW

LED Indicator ——→

Multi-function
Button (MFB) ——→

Microphone ——→

Ear-tip ←——

Charging Ports ←——

FRONT

REAR

Lock

Micro-USB
Charging Port

PAIRING

MONO EARBUD USE

- Press MFB (on preferred earpiece) for 5 seconds, red & blue light will flash.
- Turn on Bluetooth on your phone/media device and scan for MOC191-L (or -R) and pair.

STEREO EARBUDS USE

- First, press the MFB on master earphone (left one) for 5 seconds until Red and Blue light flash alternately and then release.
- Turn on Bluetooth on your phone/media device and scan for MOC191-L and pair.
- Finally, press the MFB on right earphone for 3 seconds until Blue light flashes slowly and then release the button, two earbuds will pair each other automatically.

(or)

- First – press the MFB on both earbuds for 3 seconds until Blue light flashes slowly and then release the button.
- The two earbuds will then pair each other automatically.
- After internal pairing is successful, the left earphone will act as master unit and will automatically enter into "phone pairing mode" (blue light flashes quickly or red and blue lights flash alternately).
- Finally, turn on Bluetooth on your phone/media device. Scan for MOC191-L and pair.

FACTORY RESET

- In turned off status, press MFB for 10 sec. for clearing phone/media device pairing record.
- In turned off status, press MFB for 20 sec. for clearing TWS pairing record. Blue light will flash for 1 sec. if cleaned successfully.
- In case of abnormal earphone function, also use this function for reset. Master and slave unit can't pair automatically.
- To turn off, press MFB for 3 seconds or simply put them back into the charging case.

CHARGING

CHARGING THE EARBUDS

- Place the earbuds into the charging case in their correct orientation, making sure the charging points make contact. A red light on the earbuds will indicate they are being charged.
- A blue light on the earbuds will indicate when they are fully charged.
- Blue light will go off after 60 seconds.
- When both earbuds are fully charged, the charging box will go into power saving mode.

CHARGING THE CASE
Warning! Please do not charge the charging box with 9V or 12V output. It may cause damage to the charging box or the earbuds.

- Plug in the USB cable and connect it to any USB port. The 4 lights in the center of the charging case indicates the charge status. If all 4 lights are illuminated, the case is fully charged.

BASIC FUNCTION

- **Answering phone calls** – press the MFB to answer.
- **Rejecting phone calls** – hold MFB for 1 sec. to reject an incoming call.
- **Play/pause** – short press MFB.
- **Activate Apple Siri or Google Assist** – Press MFB for about 2 sec.
- **Volume up/down** – no support. Use device controls.
- **Previous track** – triple click MFB when music plays.
- **Next track** – double click MFB when music plays.
- **Power on** – hold MFB for roughly 3 sec (blue light will be on).
- **Power off** – Hold MFB of either of them for about 4 sec. They will be switched off at the same time (red lights are on). You can also simply place them in the charging box to turn them off.

SPECIFICATIONS

- Model No: . . . . .MT191.
- Bluetooth: . . . . .ver. 5.0.
- Earphone battery capacity: . . . . 3.7V, 40 mAh x2.
- Earphone Weight: . . . . 5 g each.
- Charging case weight: . . . . 40 g.
- Charging case battery capacity: . . . . .500 mAh.

- Working range: . . . . .10 meter.
- Talk Time: . . . . .5 hours.
- Earphone standby time: . . . . .40 hours.
- Charging case size: . . . . 75 x 40 x 30 mm.

POTENTIAL PROBLEMS

Potential problem	Solution
Slave earbud disconnecting during call:	Hang up, place slave earbud into charging case to recover, then re-power on. It will connect automatically.
Master and slave earbuds can't pair:	Press MFB on both earbuds for 20 sec. to clear memory, then re-power on and pair.
About 20 msec delay, or slave earbud disconnecting:	Power off, then re-power on.
For any other exceptions in use:	Place earbuds into charging case to recover. If this doesn't help, press MFB on both earbuds for 20 sec. to clear memory. Re-power on and pair.

Moc APEX TWS Earbuds MT191 Manual – **Optimized PDF**
Moc APEX TWS Earbuds MT191 Manual – **Original PDF**