


MODify Kit 02 Gondol Modular Merchandising System



# MODify Kit 02 Gondol Modular Merchandising System Instructions

[Home](#) » [MODify](#) » MODify Kit 02 Gondol Modular Merchandising System Instructions 

## Contents

- [1 MODify Kit 02 Gondol Modular Merchandising System](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 features and benefits](#)
- [5 dimensions](#)
- [6 Shipping](#)
- [7 MODify Accessories](#)
- [8 Tools Required](#)
- [9 How to Apply & Remove Graphics](#)
- [10 Graphics Storage & Care](#)
- [11 Kit Hardware BOM](#)
- [12 Kit Graphics BOM](#)
- [13 FAQ](#)
- [14 Documents / Resources](#)
  - [14.1 References](#)
- [15 Related Posts](#)



**MODify Kit 02 Gondol Modular Merchandising System**



## Specifications

- Dimensions: 76.5W x 96H x 28.5D (1943.1mm x 2438.4mm x 723.9mm)
- Approximate Weight: 104 lbs (47.1736 kg)
- Shipping Dimensions: 85L x 14H x 24D (2159mm x 355.6mm x 609.6mm)
- Approximate Shipping Weight: 177 lbs (80.2858 kg)
- Graphic Material: Dye-sublimated fabric

## Product Information

The MODify Gondola Kit 02 is a part of the MODify Modular Merchandising System, featuring interchangeable fixtures and accessories that allow for easy assembly, disassembly, and rearrangement to create various display configurations. This kit includes five frames with silicone-edge graphics that can be customized with branded graphics and optional accessories like shelves or hang bars.

MODify™ is a one-of-a-kind Modular Merchandising System that is made up of interchangeable fixtures and accessories that can be easily assembled, disassembled, and rearranged to create a variety of different display configurations. The MODify system incorporates SEG push-fit fabric graphics that enable you to brand, promote and merchandise with ease.

MODify Gondola Kit 02 is composed of five frames adorned with high-quality silicone-edge graphics. This versatile display can be tailored to your brand's unique aesthetic with custom printed graphics, and you can also enhance its functionality by incorporating optional shelves or hang bars.

## Features and Benefits

- Base Kit includes: Towel bars, U bars
- Optional Accessories Include: Faceout bars, Shelves

## Product Usage Instructions

### How to Apply & Remove Graphics

**Installation:** Push the SEG bead into each corner of the frame with your thumb, then push the SEG bead into the middle of the run and work your way around the perimeter until all beading is secure. Ensure beading is properly pushed into the extrusion profile.

**Removal:** Use the pull tab on the graphic and gently pull it from the frame, going around the perimeter.

### Graphics Storage & Care

Graphics should be folded with the graphic facing inward and stored in a sealable plastic bag. Spot clean with a damp white cloth or machine wash on a gentle cycle with cool water. Line dry flat.

## features and benefits

### Base Kit includes

- Frame, slatwall, shelf and base colors in kit are all the same, your choice of all white, black, or silver
- Heavy-duty aluminum frame, steel base
- Steel, slotted uprights
- Five frames: two ends, two center, one header
- Two, 35W" sections in center hold SEG push-fit fabric graphics on both sides
- End caps each hold a 28"W x 81"H SEG push-fit fabric graphic, black liners on inside
- Frame topper with 59"W x 12"H SEG push-fit graphic, one on each side
- Non-rolling base
- Display is easy to assemble and install
- Lifetime hardware warranty against manufacturer defects.

### Optional Accessories Include

- Towel bars.
- Faceout bars
- U bars
- Shelves

## dimensions

### Hardware

### Assembled unit

- 76.5"W x 96"H x 28.5"D
- 1943.1mm(w) x 2438.4mm(h) x 723.9mm(d)
- Approximate Weight:
- 104 lbs / 47.1736 kg

## Shipping

### Packing case(s):

- 1 Box

### Shipping dimensions:


- (85"L x 14"H x 24"D)
- 2159mm(l) x 355.6mm(h) x 609.6mm(d)
- Approximate shipping weight:
- 177 lbs / 80.2858 kg

### additional information

#### Powder coat color options:



#### Wood laminate color options:

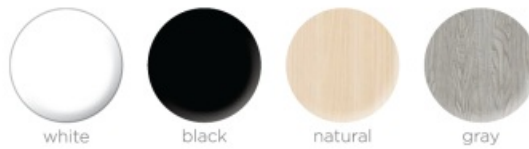

## MODify Accessories

### Slotwall Accessories



MFY-SLT-HK  
4", 6", 8", 10" & 12"



MFY-SLT-FC  
6", 8", 10" & 12"



MFY-SLT-WTR-16-7

### U-Bar Accessories



MFY-TWL-FC  
6", 8" & 10"




MFY-UBR-FC  
6", 8" & 10"




MFY-CSTR-4-PK


### Shelf and Hanger Bars



MFY-36-12-SHELF




MFY-SLF-36-12-HB



MFY-SLT-TWL-36-3



MFY-UBR-36-12



MFY-DB-36-17

## Tools Required



MULTI HEX KEY  
(INCLUDED)



PHILLIPS SCREW DRIVER  
(NOT INCLUDED)




9/16" SOCKET WRENCH  
(NOT INCLUDED)

## How to Apply & Remove Graphics


Installation and removal of SEG graphics is easy!

Installation: Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.]

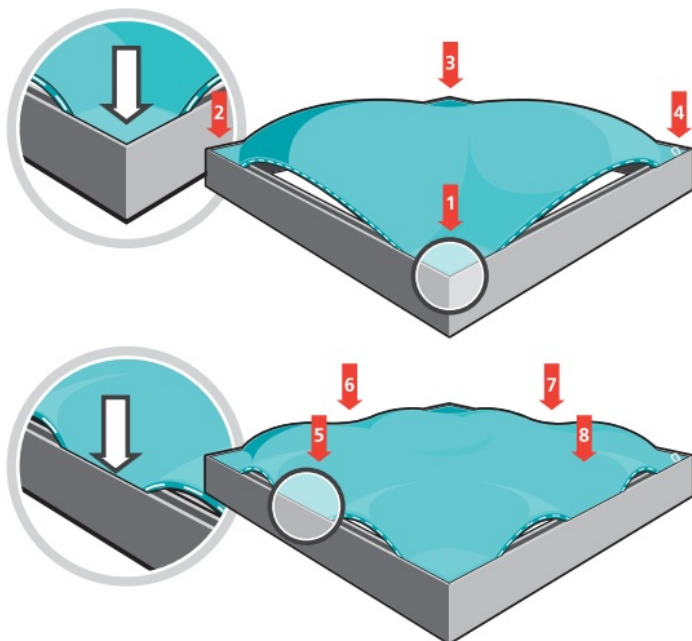





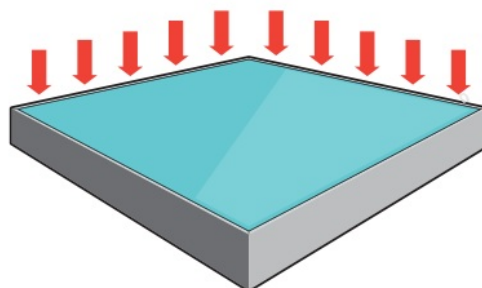



**Note:** Keep the set up area clean by using a drop cloth, washing hands before set-up or by wearing gloves.



**Removal:** Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.



## Graphics Storage & Care



Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth. If washing is necessary, use a commercial size front-loading washing machine, gentle cycle with cool water. Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.

QTY	IMAGE	DESCRIPTION
11		
3		3/8-16 x 2.5-3'L bolt
1		2045MM (80.51in) O RIGHT UPRIGHT
1		2045MM (80.51in) OF 832 MIDDLE UPRIGHT
2		305MM (12in) LENGTH OF SHELF STANDARD EXTRUSION
1		2045MM (80.51in) LEFT UPRIGHT
1		708MM (27.87in) MIDDLE SUPPORT LEG
1		708MM (27.87in) LEFT SUPPORT LEG
1		708MM (27.87in) RIGHT SUPPORT LEG




MFY-BOLT-375-16-2.5

## SETUP INSTRUCTIONS

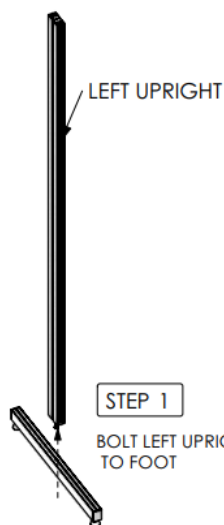

STEP 1


BOLT LEFT UPRIGHT TO FOOT



MIDDLE UPRIGHT

STEP 2

BOLT MIDDLE UPRIGHT TO FOOT




RIGHT UPRIGHT

STEP 3


BOLT RIGHT UPRIGHT TO FOOT

QTY	IMAGE	DESCRIPTION
4		883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION WITH CAM LOCKS BOTH ENDS
3		7MM SEG PLASTIC END CAP FOR 832 EXTRUSION



## SETUP INSTRUCTIONS




IMPORTANT! MAKE A HALF TURN TO LOCK EXTRUSIONS



LOOSEN END CAP TO ATTACH TOP CROSS BRACE




CROSS BRACE SITS ON SUPPORT LEGS

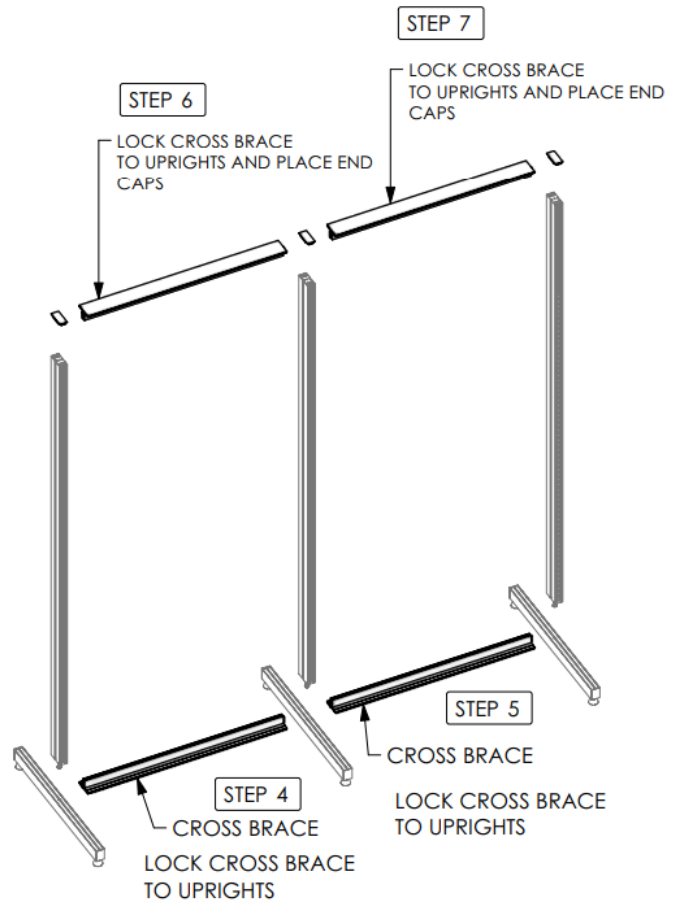


NOTE: BOTTOM CROSS BRACE SITS ON TOP INSIDE EDGE OF LEFT AND RIGHT SUPPORT LEG



QTY	IMAGE	DESCRIPTION
4		(39.26 w X 84.59 h total size ) 35.26 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)




PRESS GRAPHIC INTO CORNERS



THEN PRESS ALONG THE PERIMETER EDGE

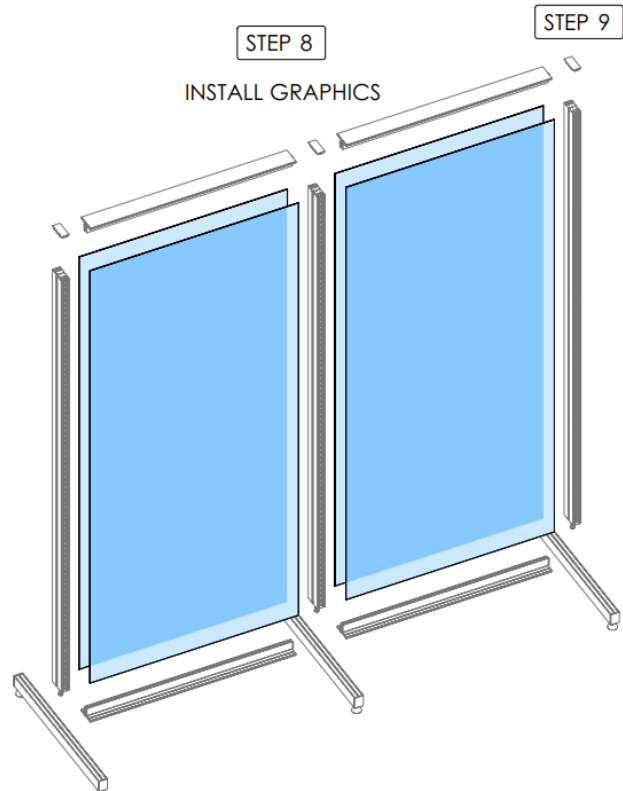
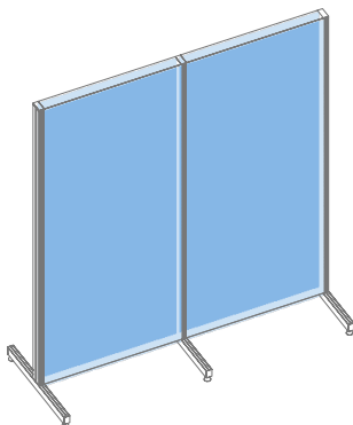


QTY	IMAGE	DESCRIPTION
2		1500MM (59.06in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
4		SINGLE VECTOR CORNER CLEAT
2		305MM (12.01in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
5		1/4"-20 x 13"L bolt



CORNER CLEAT


STEP 10  
ASSEMBLE TOP  
FRAME

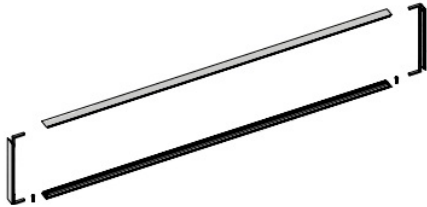

X4


## SETUP INSTRUCTIONS

STEP 11  
BOLT TOP FRAME  
TO CROSS BRACE

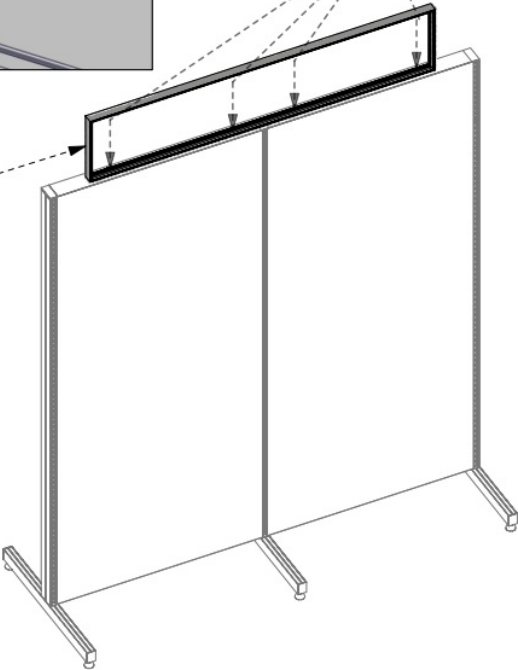


QTY	IMAGE	DESCRIPTION
2		(62.94 w X 15.88 h total size ) 58.94 w X 11.88 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner


## SETUP INSTRUCTIONS



PRESS GRAPHIC INTO CORNERS




THEN PRESS ALONG THE  
PERIMETER EDGE

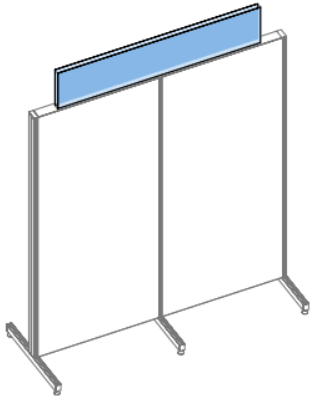

STEP 12

INSTALL GRAPHICS

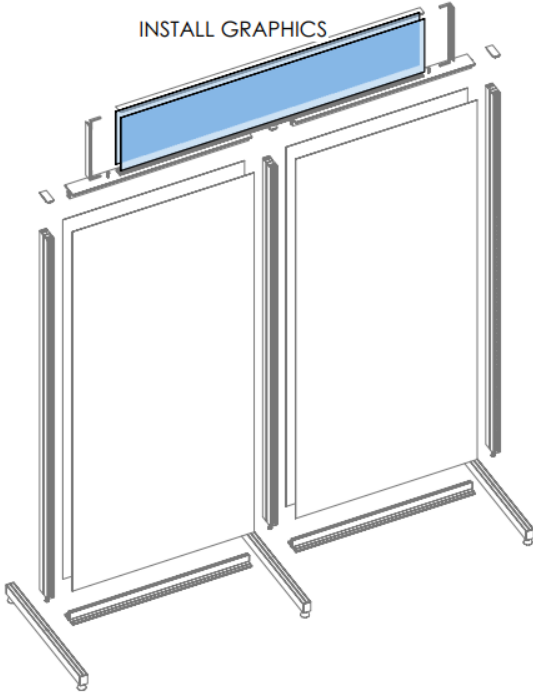


QTY	IMAGE	DESCRIPTION
4		2050MM (80.71in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
2		711MM (27.99in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS WITH SIDE BRACKET
8		SINGLE VECTOR CORNER CLEAT
3		711MM (27.99in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
2		2020MM LENGTH OF PH1 EXTRUSION-WITH CAM LOCKS BOTH ENDS


## SETUP INSTRUCTIONS

### STEP 13




#### ASSEMBLE X2 FRAMES





CORNER CLEAT



IMPORTANT! MAKE A HALF TURN  
TO LOCK EXTRUSIONS

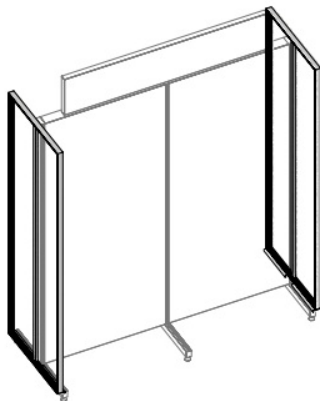


"L" BRACKET




"L" BRACKET

QTY	IMAGE	DESCRIPTION
2		(31.88 w X 84.59 h total size ) 27.88 w X 80.59 h finish size, Unprinted 5oz. Black Soft Knit, sewn with silicone beading around perimeter & pull tab in bottom right corner

## SETUP INSTRUCTIONS






PRESS GRAPHIC INTO CORNERS





THEN PRESS ALONG THE  
PERIMETER EDGE








### STEP 14

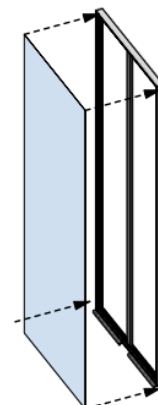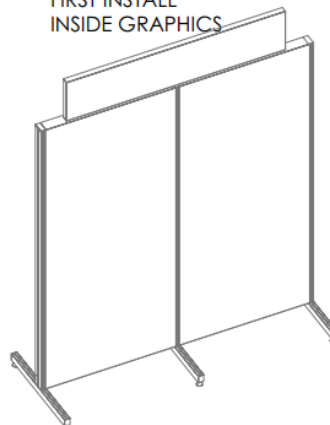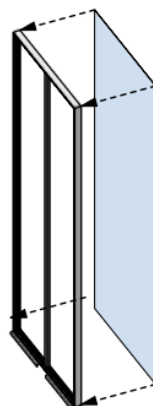
#### FIRST INSTALL INSIDE GRAPHICS




QTY	IMAGE	DESCRIPTION
2		SIDE BRACKET
8		MFY-BOLT-8-32-0.75

SETUP INSTRUCTIONS

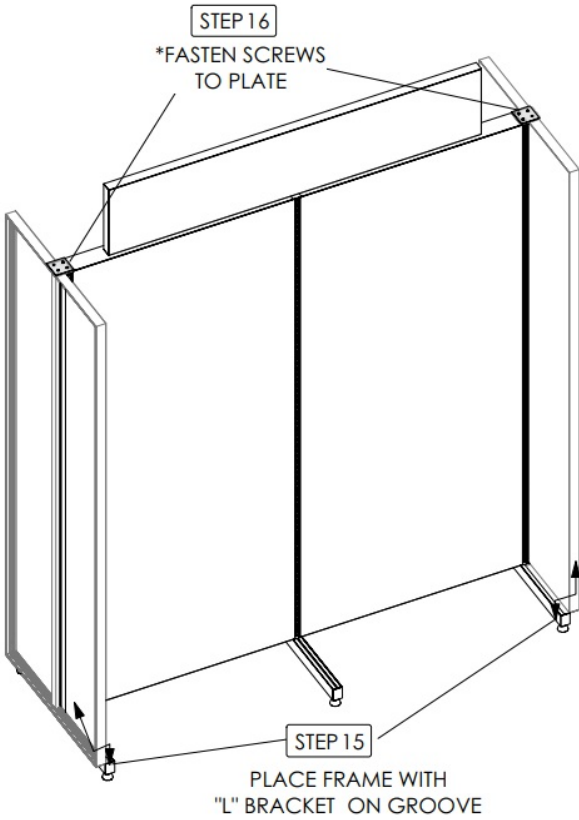


QTY	IMAGE	DESCRIPTION
2		(31.88 w X 84.59 h total size ) 27.88 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner


SETUP INSTRUCTIONS




PRESS GRAPHIC INTO CORNERS






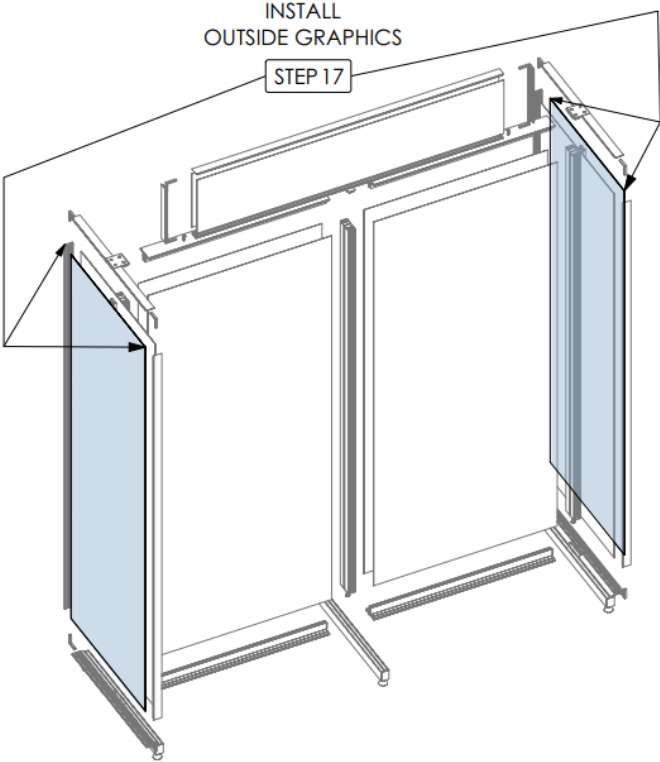




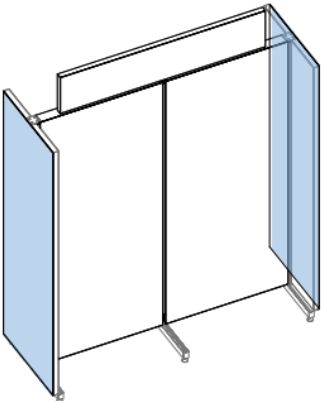











THEN PRESS ALONG THE PERIMETER EDGE













INSTALL OUTSIDE GRAPHICS  
STEP 17



**Kit Hardware BOM**

ITEM	COMPONENTS	QTY	DESCRIPTION
	101-2020-01-01	2	2020MM LENGTH OF PH1 EXTRUSION-WITH CAM LOCKS BOTH ENDS
	306-305-15-15	2	305MM (12.01in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
	306-711-15-15	3	711MM (27.99in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
	306-711-15-15	2	711MM (27.99in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS WITH SIDE BRACKET
	306-1500-15-15	2	1500MM (59.06in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
	306-2050-15-15	4	2050MM (80.71in) LENGTH OF WMFCD EXTRUSION 45 DEGREE MITER CUT BOTH ENDS
	824-708	1	708MM (27.87IN) MIDDLE SUPPORT LEG
	824-708	1	708MM (27.87IN) RIGHT SUPPORT LEG
	824-708	1	708MM (27.87IN) LEFT SUPPORT LEG
	832-2045	1	2045MM (80.51in) LEFT UPRIGHT
	832-2045	1	2045MM (80.51in) O RIGHT UPRIGHT
	832-2045	1	2045MM (80.51in) OF 832 MIDDLE UPRIGHT
	832-EC	3	7MM SEG PLASTIC END CAP FOR 832 EXTRUSION
	835-883-01-01	4	883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
	MFY-BOLT-.25-20-1	5	1/4"-20 x 13"L bolt
	MFY-BOLT-8-32-0.75	8	MFY-BOLT-8-32-0.75
	MFY-BOLT-3/8-16-2.5	3	3/8-16 x 2.5-3"L bolt
	MFY-SLF-STD-12	2	305MM (12in) LENGTH OF SHELF STANDARD EXTRUSION
	SIDE BRACRET	2	SIDE BRACKET
	VF-CC	12	SINGLE VECTOR CORNER CLEAT

## Kit Graphics BOM

	MFY-GN-02-A-G	1	(31.88 w X 84.59 h total size ) 27.88 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
	MFY-GN-02-B-G	1	(31.88 w X 84.59 h total size ) 27.88 w X 80.59 h finish size, Unprinted 5oz. Black Soft Knit, sewn with silicone beading around perimeter & pull tab in bottom right corner
	MFY-GN-02-C-G	1	(39.26 w X 84.59 h total size ) 35.26 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)
	MFY-GN-02-D-G	1	(39.26 w X 84.59 h total size ) 35.26 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)
	MFY-GN-02-E-G	1	(31.88 w X 84.59 h total size ) 27.88 w X 80.59 h finish size, Unprinted 5oz. Black Soft Knit, sewn with silicone beading around perimeter & pull tab in bottom right corner
	MFY-GN-02-F-G	1	(31.88 w X 84.59 h total size ) 27.88 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
	MFY-GN-02-G-G	1	(39.26 w X 84.59 h total size ) 35.26 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)
	MFY-GN-02-H-G	1	(39.26 w X 84.59 h total size ) 35.26 w X 80.59 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)
	MFY-GN-02-I-G	1	(62.94 w X 15.88 h total size ) 58.94 w X 11.88 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner
	MFY-GN-02-J-G	1	(62.94 w X 15.88 h total size ) 58.94 w X 11.88 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner

## FAQ


### Q: Are additional accessories available for the MODify Gondola Kit 02?

A: Yes, additional accessories such as towel bars, face out bars, U bars, and shelves are available to enhance the functionality of the display.


### Q: What tools are required for assembly?

A: The assembly requires a multi-hex key (included), a Phillips screwdriver (not included), and a 9/16 socket wrench (not included).

## Documents / Resources

	<p><b><a href="#">MODify Kit 02 Gondol Modular Merchandising System</a></b> [pdf] Instructions</p> <p>Kit 02 Gondol Modular Merchandising System, Kit 02, Gondol Modular Merchandising System, Modular Merchandising System, Merchandising System</p>
---	---

## References

-  [The Exhibitors' Handbook](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.