




MOEN 181119 One-Handle Posi-Temp Trim Kit Instruction Manual

[Home](#) » [Moen](#) » MOEN 181119 One-Handle Posi-Temp Trim Kit Instruction Manual 

*MOEN 181119 One-Handle Posi-Temp Trim
Kit Instruction Manual*



ONE-HANDLE POSI-TEMP® TRIM KIT

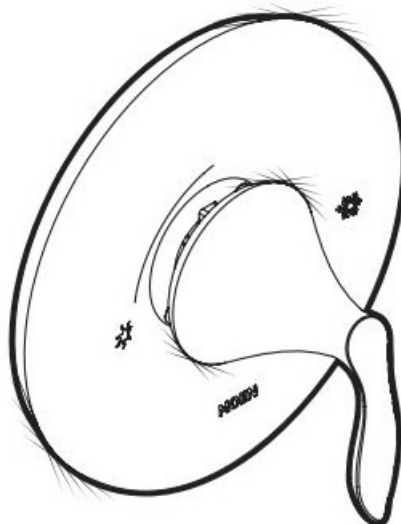

Contents

1 HELPFUL TOOLS

2 Parts List

3 Documents / Resources

3.1 References

4 Related Posts

HELPFUL TOOLS

For safety and ease of faucet replacement, Moen recommends the use of these helpful tools.

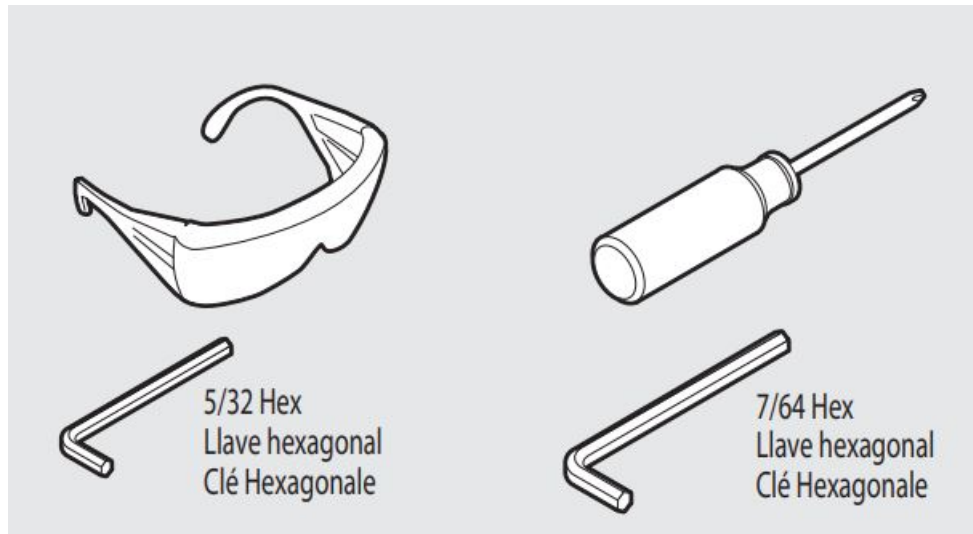



Image is for Reference only (Style varies by model)

(Save instruction sheet for future reference)

Register Online: www.moen.com/product-registration

⚠ CAUTION — TIPS FOR REMOVAL OF OLD FAUCET: Always turn water supply OFF before removing existing faucet or disassembling the valve. Open faucet handle to relieve water pressure and ensure that complete water shut-off has been accomplished.


* Included with valve

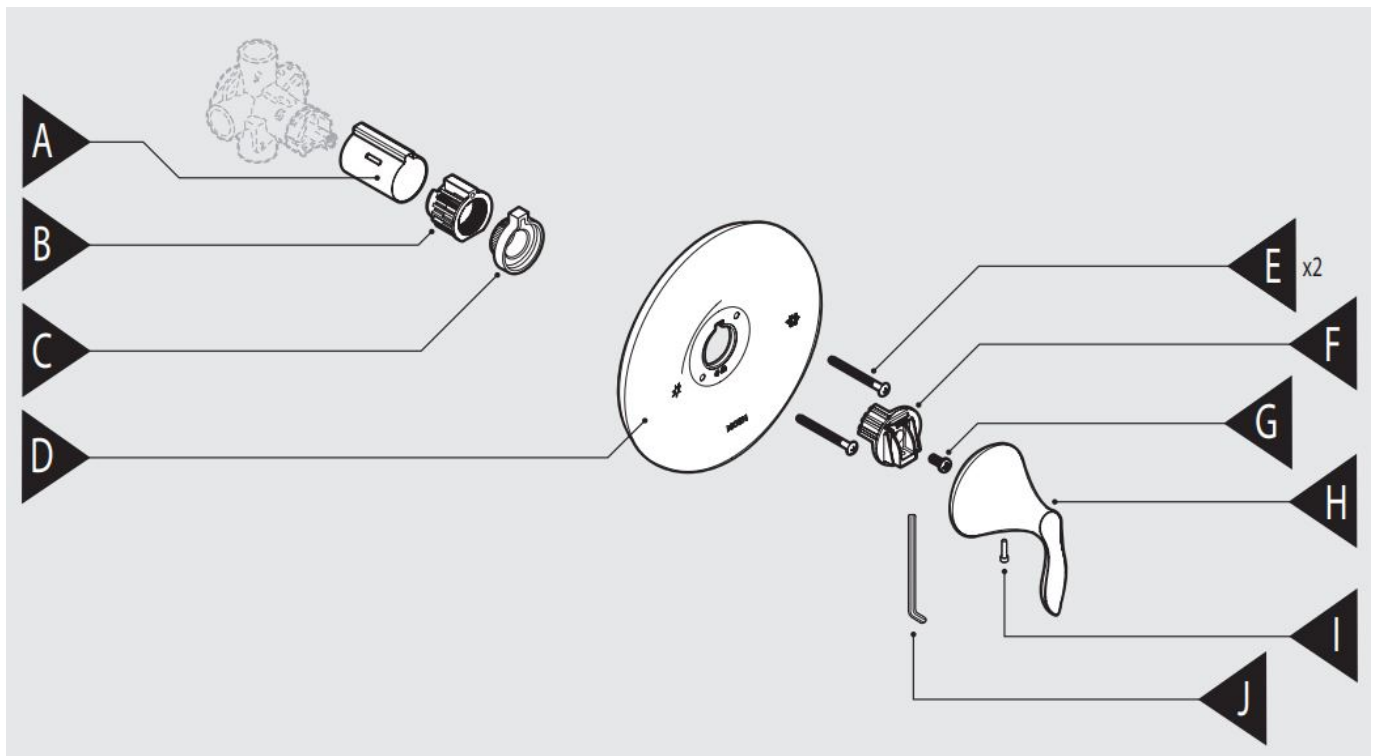


Parts List

- A. Stop Tube
- B. Key Stop
- C. Adjustable Temperature Limit Stop
- D. Escutcheon
- E. Escutcheon Screws (x2)
- F. Handle Adapter
- G. Handle Adapter Screw
- H. Handle
- I. Set Screw
- J. Hex Key


* Included with valve

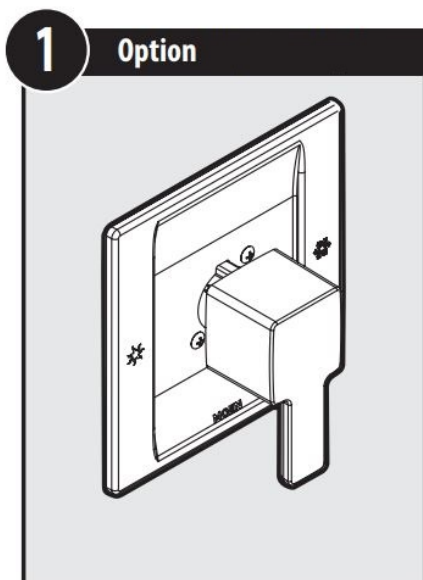


Remove old trim from valve.

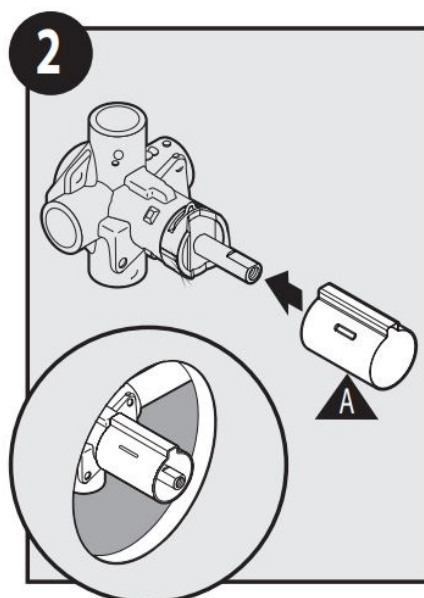


Slide Stop Tube (A) onto valve.

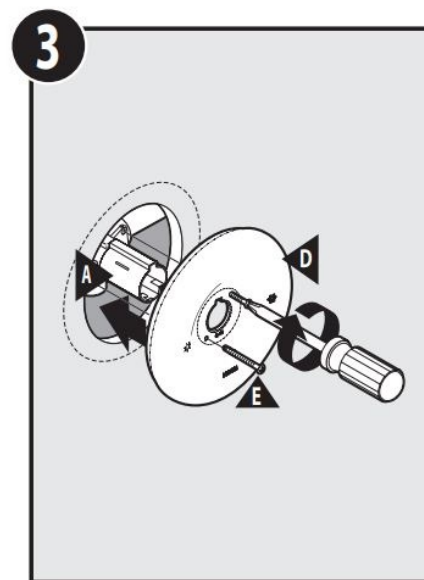


Secure Escutcheon (D) against wall by threading Screws (E) through Escutcheon into valve.

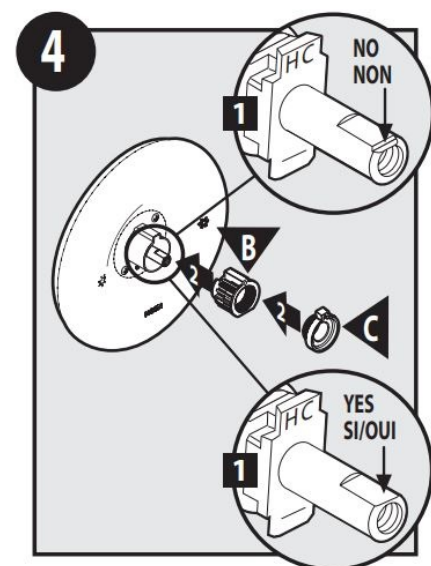

1. Make sure cartridge stem is positioned with notch facing down.
2. Insert Key Stop (B) & Adjustable Limit Stop (C) into Stop Tube.

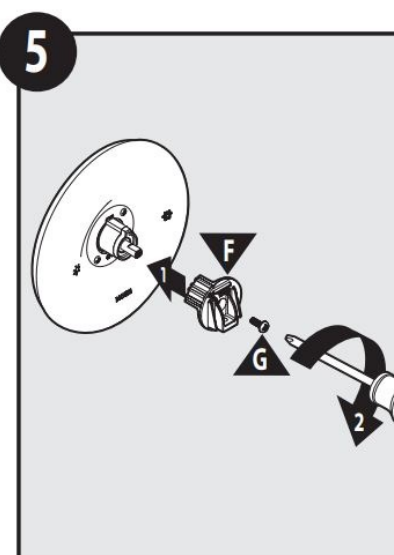

1. Install Handle Adapter (F) onto cartridge stem.
2. Secure with Handle Adapter Screw (G).

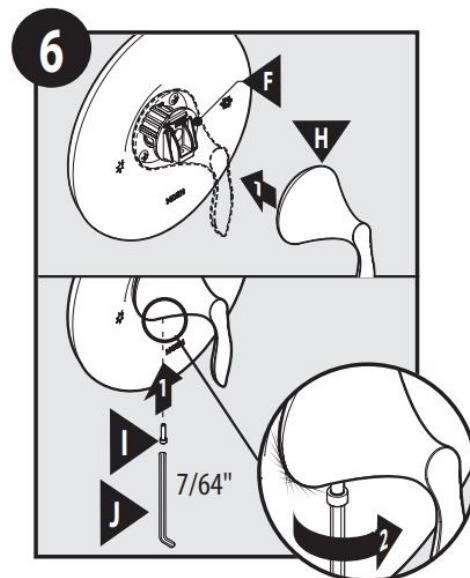

1. Place Handle (H) on Handle Adapter (F).
2. Tighten with Hex Wrench (J).

PLEASE CONTACT MOEN FIRST For Installation Help, Missing or Replacement Parts (USA) 1-800-BUY-MOEN (1-800-289-6636) www.moen.com (Canada) 1-800-465-6130 www.moen.ca

Shower heads: Standard 9.5 L/min (2.5 gpm) max. and High Efficiency 7.6 L/min (2.0 gpm) max. or less For use with automatic compensating valves rated at 4.2 L/min (1.1 gpm) or less

POR FAVOR, CONTÁCTESE PRIMERO CON MOEN Para obtener ayuda de instalación, piezas faltantes o de recambio 011 52 (800) 718-4345 www.moen.com.mx

Roseta: Estándar 9.5 L/min (2.5 gpm) máx. y alta eficiencia 7.6 L/min (2.0 gpm) máx. o menos Para usarse con válvulas de compensación automática de 4.2 L/min (1.1 gpm) o menos

VEUILLEZ D'ABORD CONTACTER MOEN En cas de problèmes avec l'installation, ou pour obtenir toute pièce manquante ou de rechange 1-800-465-6130 www.moen.ca

Pommes de douche : Débit standard de 9,5 L/min (2,5 gpm) max. ou à haute efficacité 7,6 L/min (2,0 gpm) max. ou moins À utiliser avec des soupapes de compensation automatique dont le débit nominal est de 4,2 L/min (1,1 gpm) ou moins



Moen Incorporated 25300 Al Moen Drive North Olmsted, Ohio 44070-8022
U.S.A.
INS10718 – 2/18 ©2018 Moen Incorporated

Moen de Mexico, S.A. de C.V. Carretera Saltillo-Monterrey KM 14.7
Ramos Arizpe, Coahuila Mexico 25900

Moen Inc. 2816 Bristol Circle Oakville, Ontario L6H 5S7
Canada

Documents / Resources



[MOEN 181119 One-Handle Posi-Temp Trim Kit](#) [pdf] Instruction Manual
181119, One-Handle Posi-Temp Trim Kit, Posi-Temp Trim Kit, One-Handle Trim Kit, Trim Kit, Trim

References

- [M MOEN | Bathroom & Kitchen Faucets](#)
- [M MOEN | Bathroom & Kitchen Faucets](#)
- [M Moen|Llaves para baÑo y cocina, cabezales, accesorios y mÃ¡s](#)
- [M Register Your Product | Moen](#)