



MOKiN B1DlcwadKPL USB C Multi Functional HUB Instruction Manual

[Home](#) » [MOKiN](#) » MOKiN B1DlcwadKPL USB C Multi Functional HUB Instruction Manual 

Contents

- [1 MOKiN B1DlcwadKPL USB C Multi-Functional HUB](#)
- [2 Product Introduction](#)
- [3 Structure Diagram](#)
- [4 Features](#)
- [5 CONNECTION](#)
- [6 Graphics Settings for Win10](#)
- [7 Storage Conditions](#)
- [8 FAQ](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)

MOKiN

MOKiN B1DlcwadKPL USB C Multi-Functional HUB

above)

2. HDMI2:


- 8K(7680×4320) 30Hz(work separately while source is DP1.4)
- 4Kx2K 60Hz / 3840×2160 (work separately while the source is DP1.2)

3. USB 2.0: Speed up to 480Mbps, 5V/0.5A@2.5W.

4. USB3.0: 5Gbps, 5V/0.9A@4.5W

5. USB-C PD3.0: Upstream charging the source devices such as Laptop/Notebook, Support 100W power in, charging limited to 87-96W for safety, affected by different firmware.


CONNECTION

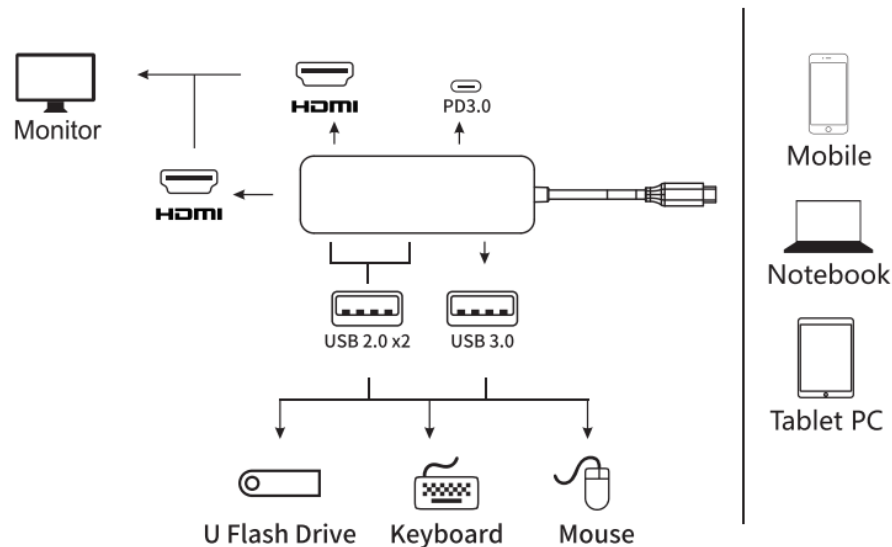


Note:

1. For Video output, USB-C source devices must support video output.
2. Suggest a charge for the power supply to keep it working stable.

Display Settings for Win10

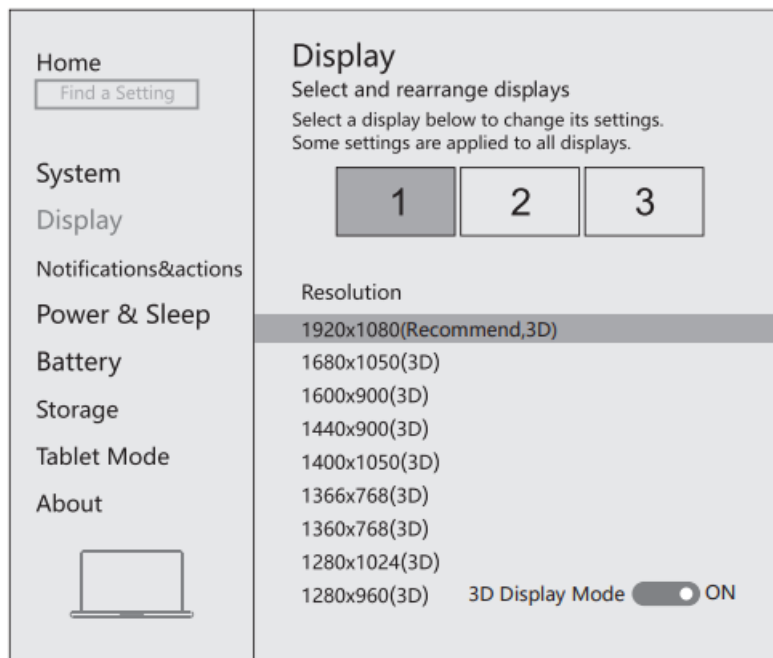


Right-click desktop > Display Settings

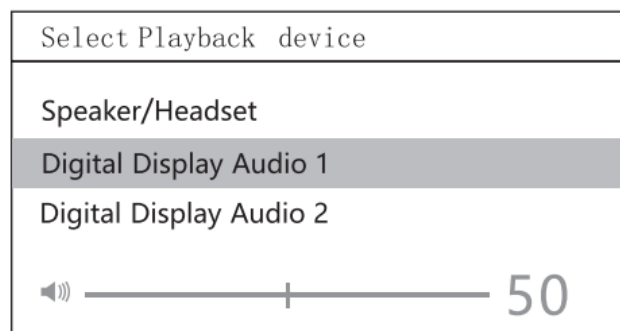


Sound Settings for Win10

General Settings	Select Display Mode
Color Settings	Single Display 1 2 3
Multiple Settings	✓ Clone Display Detect
Custom Resolutions	Extended Desktop
DisplayPort Topology	Collage
	Select One or More Active Displays
	Built-in Display ▼
	HDMI Display ▼
	HDMI Display ▼

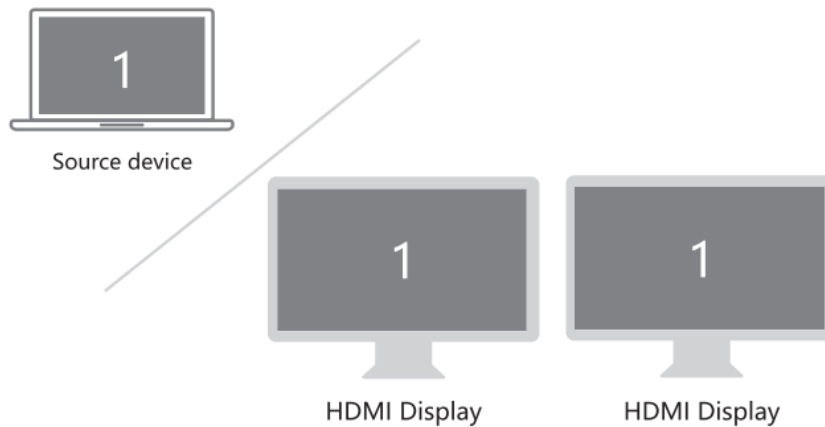



Graphics Settings for Win10

General Settings	Select Display Mode
Color Settings	Single Display 1 2 3
Multiple Settings	Clone Display Detect
Custom Resolutions	<input checked="" type="checkbox"/> Extended Desktop
DisplayPort Topology	Collage
	Select One or More Active Displays
	Built-in Display ▼
	HDMI Display ▼
	HDMI Display ▼

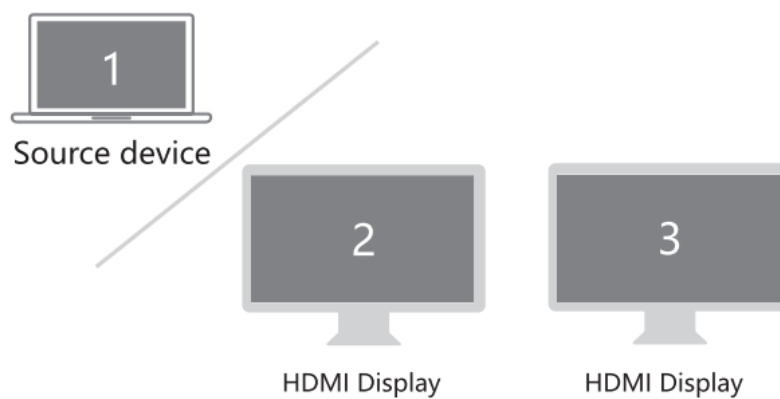



Clone Mode

Right-click desktop › Graphics Settings > Display

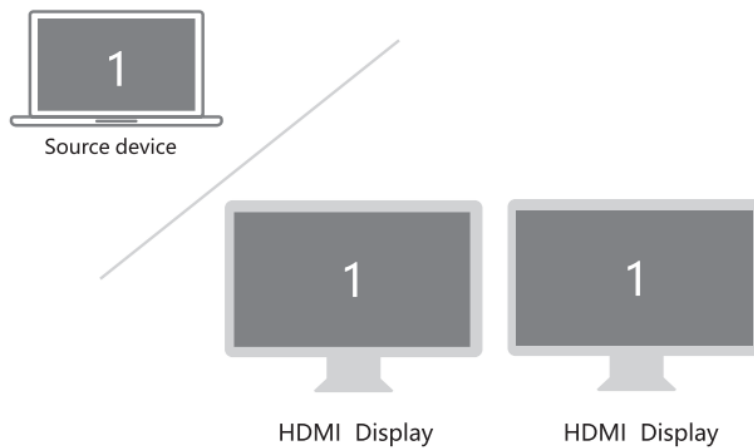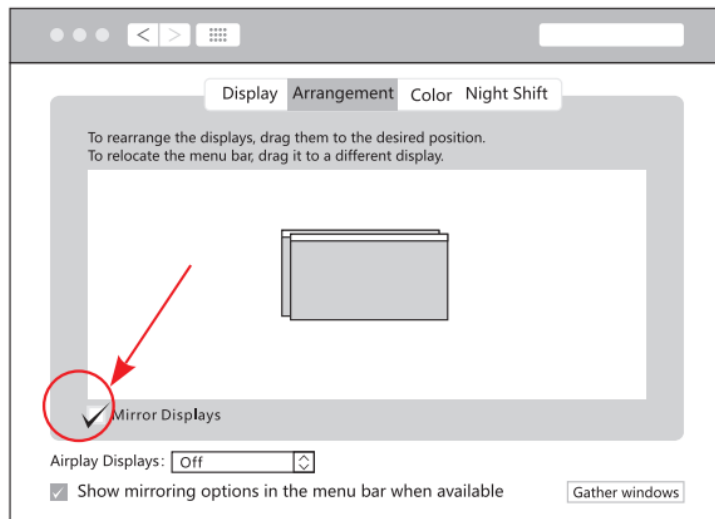

Extended Desktop

Right-click desktop > Graphics Settings > Display

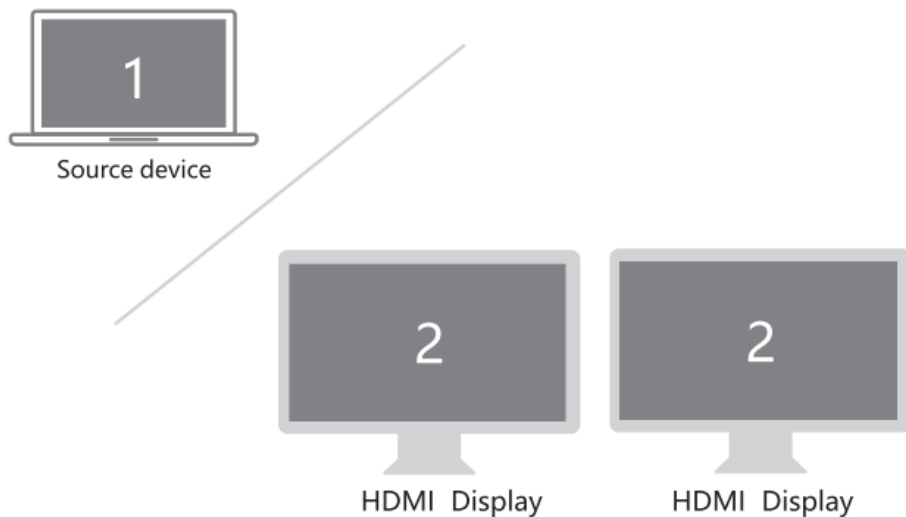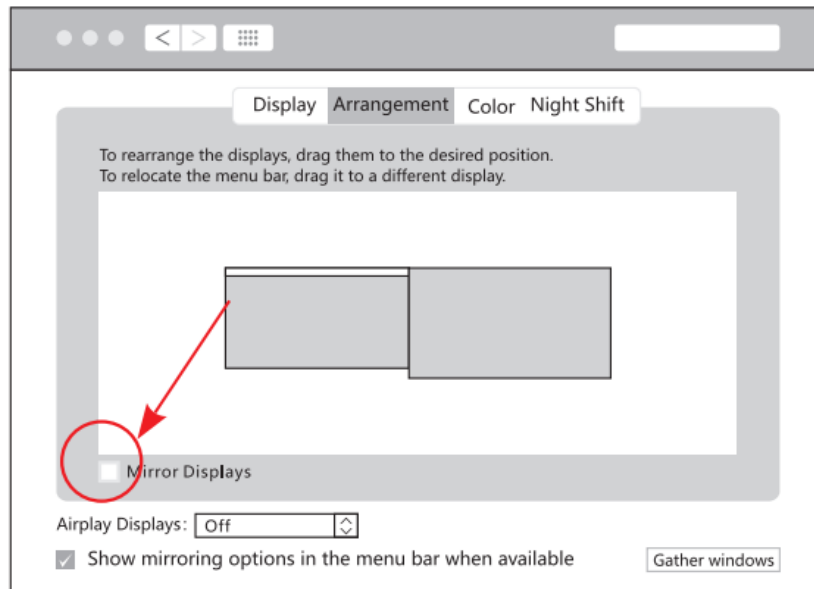

Graphics Settings for Mac

Mirror Display

Apple logo > System Preferences > Displays

Storage Conditions

- Ambient Operating Temperature: 0 C to 70 C (32°F to 158°F)
- Storage Temperature: -30 C to 120 C (-22°F to 248°F)
- Ambient Operating Humidity: 20%-80%RH
- Storage Humidity: 20%-90%RH

FAQ

A. Why is there no video output?

1. Pls make sure your USB-C source devices support video output
2. Pls check the connection is good

3. Pls use a standard HDMI cable

Why is there no audio output from the HDMI port?

1. Pls, make sure that there is an audio output function on the monitor.
2. Pls, set the external monitor as the default audio output device.

Sometimes WiFi stops working while the hard disk is connected to the hub, How to do it?

- 2.4G network is easily disturbed. You can switch to a 5G network Or you can adjust the placement of the hard disk, and move to the suitable place.
- Win10 system, if one of the displays does not display, how do
- Right-click desktop > Graphics Settings > Select One or More Active Displays

If the USB driver cannot be identified, what to do?

- Restart the computer and reconnect the product
- If the speed is too slow when connecting the hard disk, how do
- Plug and pull out for more times
- Restart the computer and reconnect the hard disk


If the display stopped after connecting a high-current hard disk, how does it?

Must be charged. Please supply power by power adapter.

HIGH-DEFINITION MULTIMEDIA INTERFACE

The terms HD, HOMI High- Definition Multimedia interface, and the HOMI Logo are trademarks or registered trademarks of HOMI Licensing Administrator. inc

Documents / Resources

	MOKiN B1DlcwadKPL USB C Multi Functional HUB [pdf] Instruction Manual B1DlcwadKPL USB C Multi Functional HUB, B1DlcwadKPL, USB C Multi Functional HUB, Multi Functional HUB, Functional HUB, HUB
---	---