



MONITOR AUDIO TB 06 In Ceiling Speaker Music Streaming System Instruction Manual

[Home](#) » [MONITOR AUDIO](#) » MONITOR AUDIO TB 06 In Ceiling Speaker Music Streaming System Instruction Manual 



TB 06
Installation Amplifiers Speaker
Library
Speaker Library Version 3



MONITOR AUDIO GROUP
ROKSAN
BLOK

Contents

- 1 Speaker Library
- 2 Change Log
- 3 Loading the library
- 4 Documents / Resources
 - 4.1 References

Speaker Library

The Monitor Audio speaker library for the second generation of Installation Amplifiers contains a detailed database of all of the loudspeakers commonly used with the Installation Amplifiers. This includes the Creator Series, Climate Garden and Cinergy.

The Library should be used when setting up your loudspeakers with one of the amps. It can be downloaded from the URL below or by scanning the QR code:

<https://brand.monitoraudio.group/d/n8o5sDWgpzZK/document-library/show/eyJpZCI6OTUwMSwidGltZXN0YW1wljoiMTY4NzQ0MDAxMiJ9:monitor-audio:BwNf-F8bJRkXJYg8jPLsoeUbSoHEAyGHN0bqYgEb2oI>




Change Log

Cinergy: limiter settings have now been added to reduce any damage to the speakers


Climate Garden: EQ profiles have been updated to improve tonal balance & performance



Loading the library

1. After downloading the library from the above link, navigate to the web GUI for the amplifier you wish to setup. Select “Settings”, then “Speaker Library” and “Import”

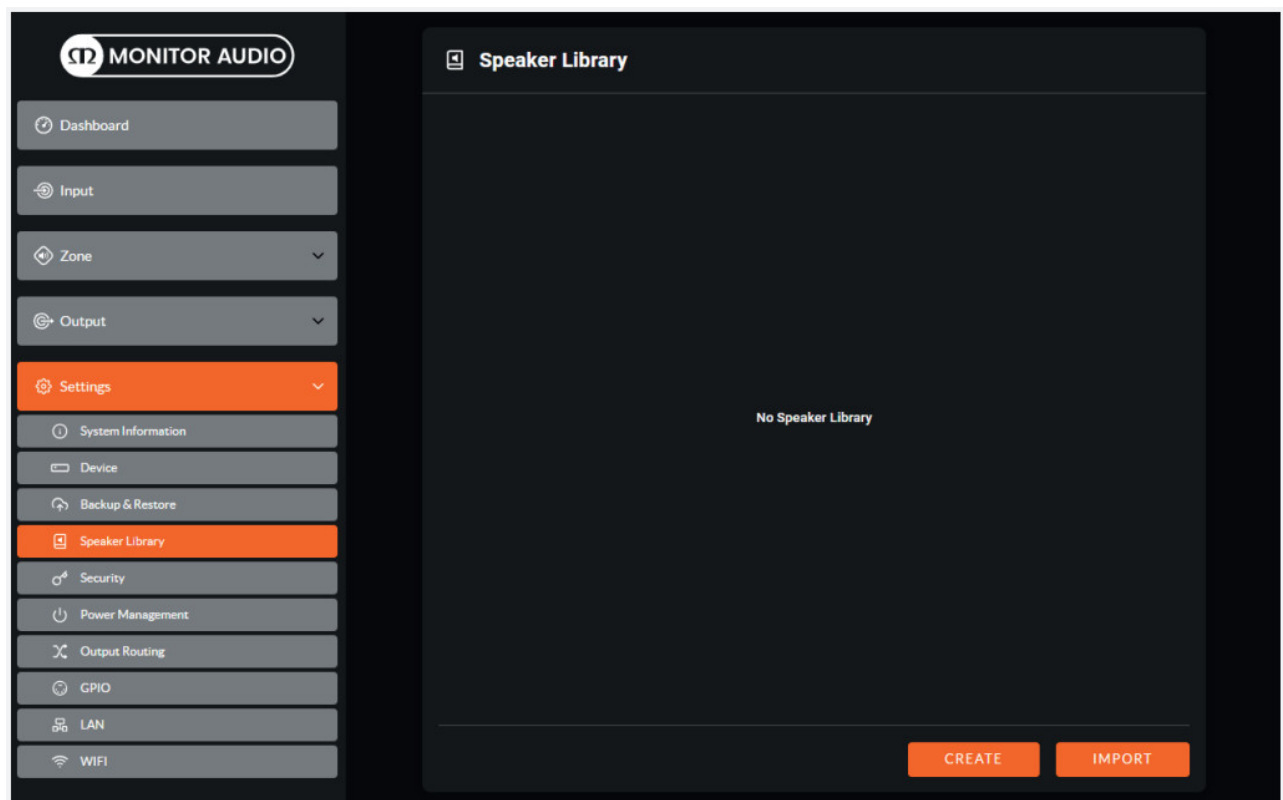


2. Click where it says "Speaker Library File (.zcl)", select the file you have just downloaded and click on "Load"

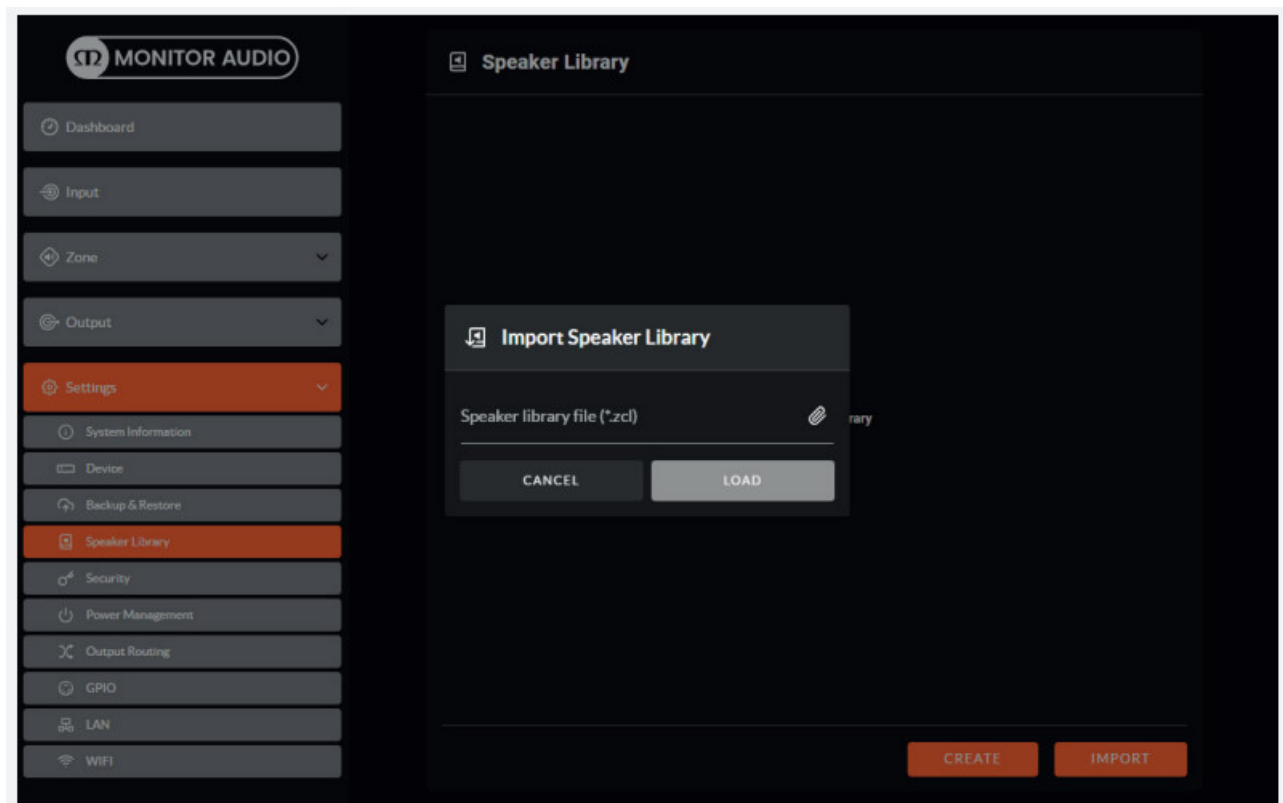


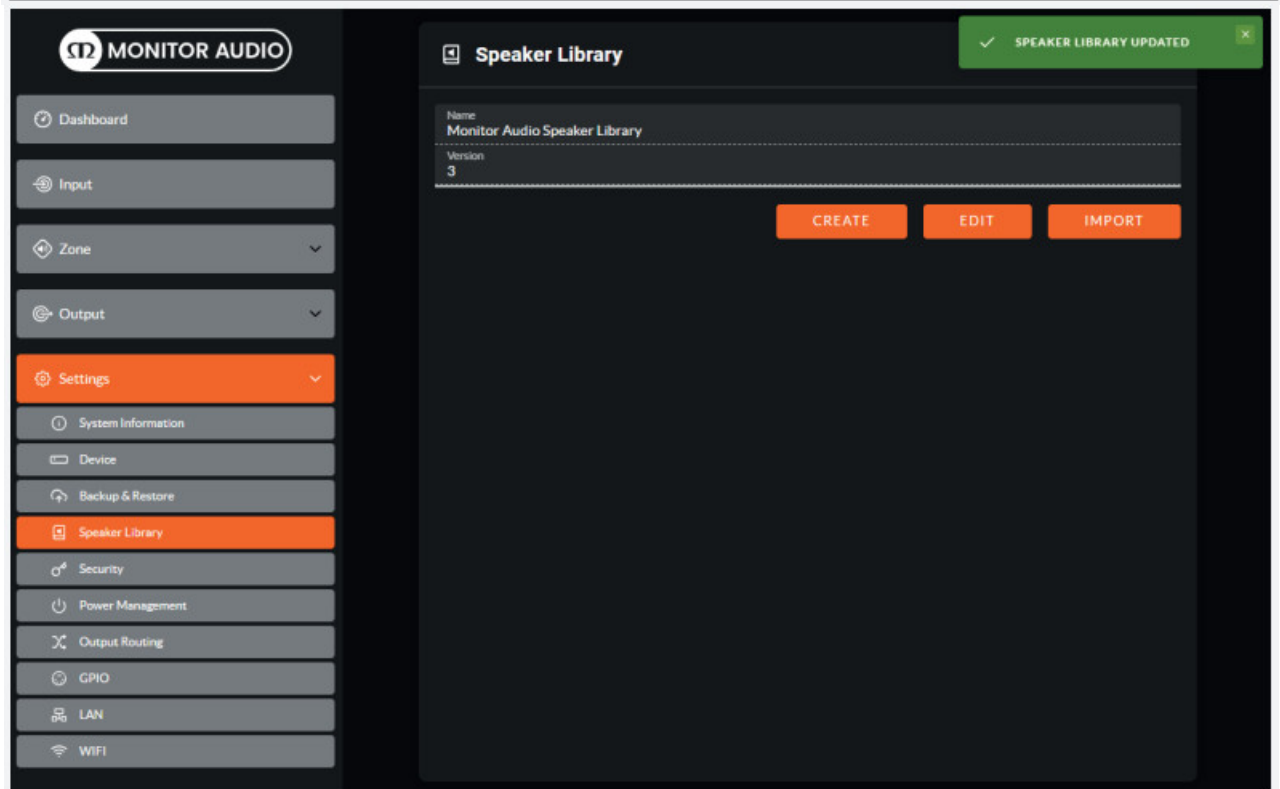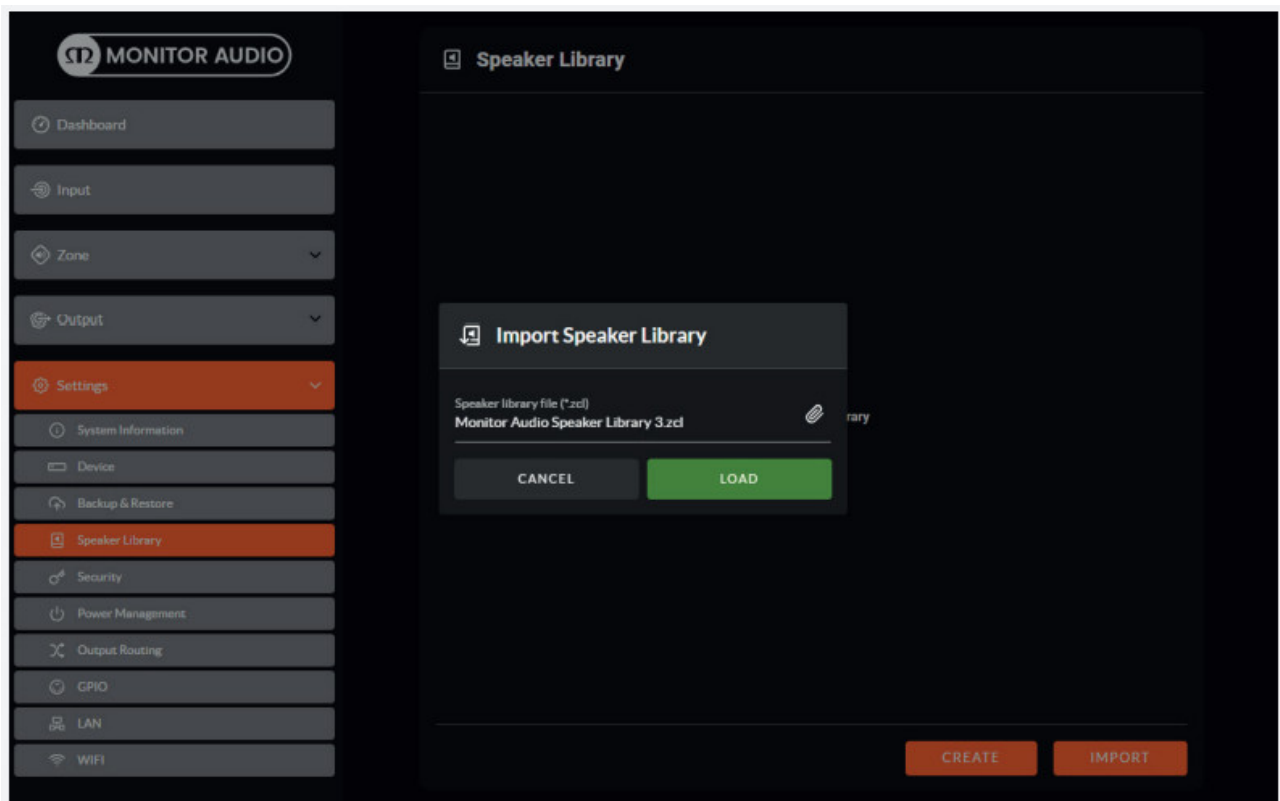


3. Next, go to "Output", then "Speaker Preset" and then "Select Preset from Library"

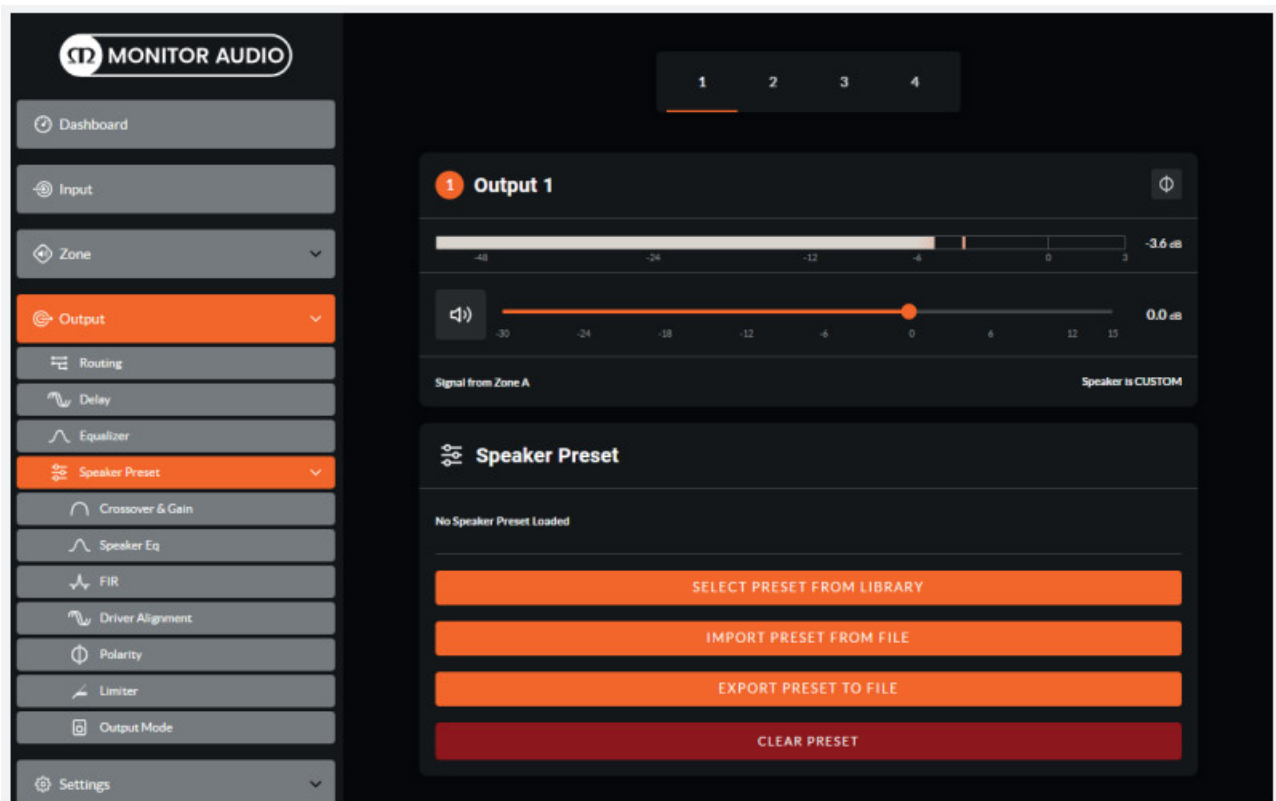

4. Select the loudspeaker you are installing and the correct profile will be loaded with the right limiters and settings for that particular loudspeaker.

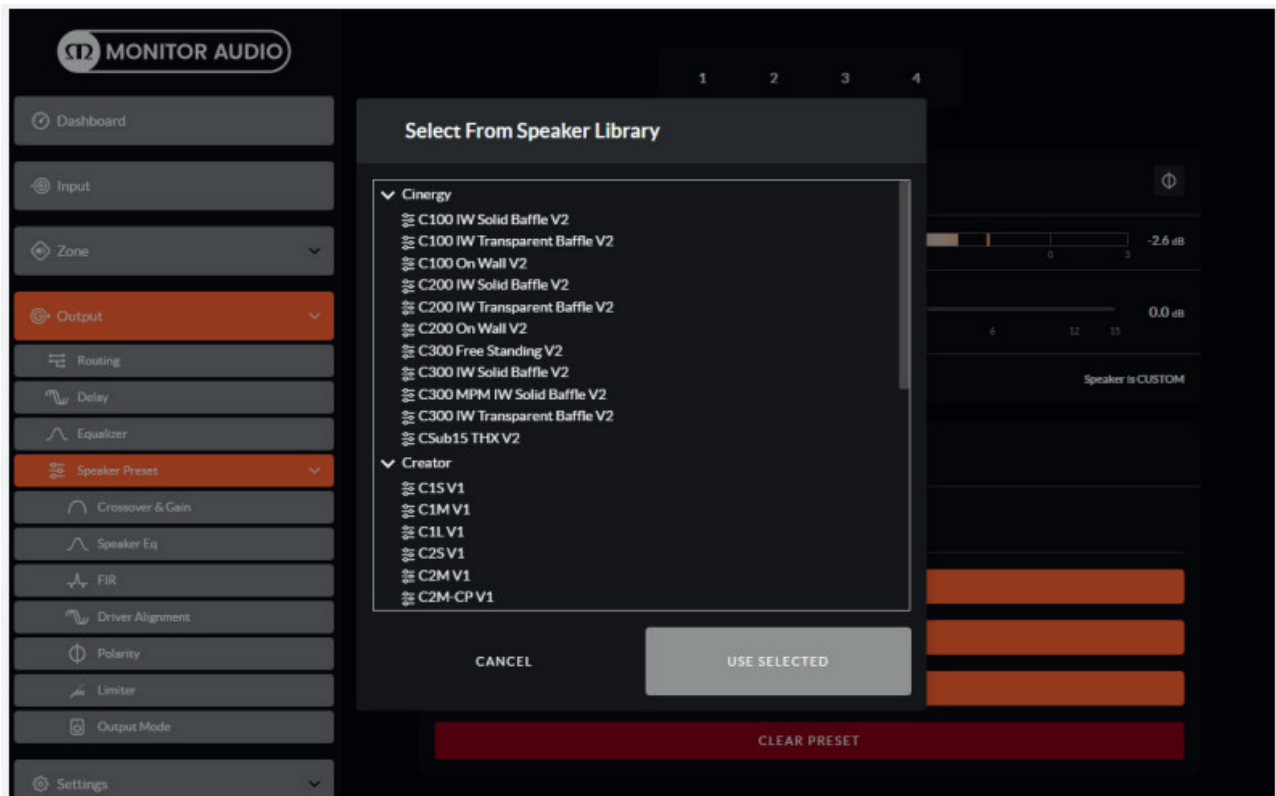


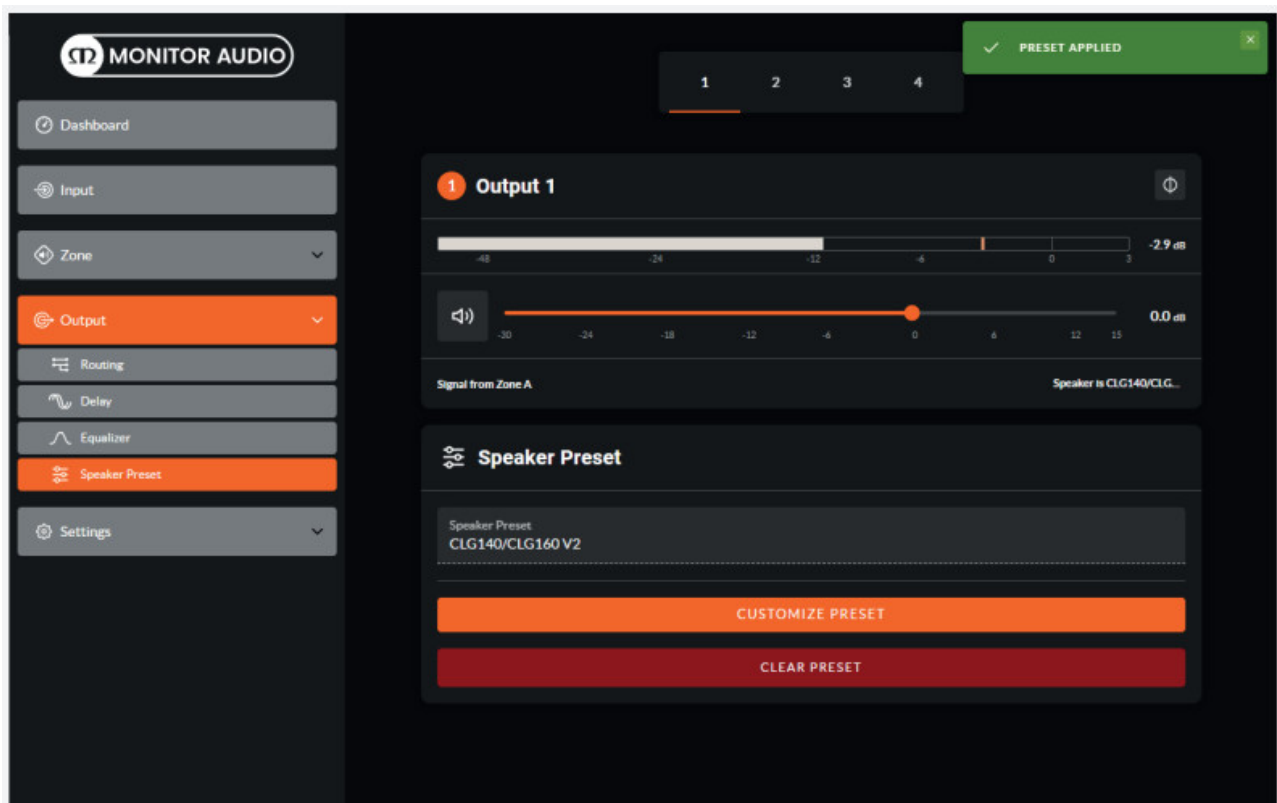


If using one of the Climate Garden loudspeakers, the preset needs to be tweaked slightly because the 100v line option gets reset when loading the preset.

The same applies if the outputs are to be bridged. This will also need to be re-applied under Output Mode (not shown below).

1. Click on "Customize Preset"

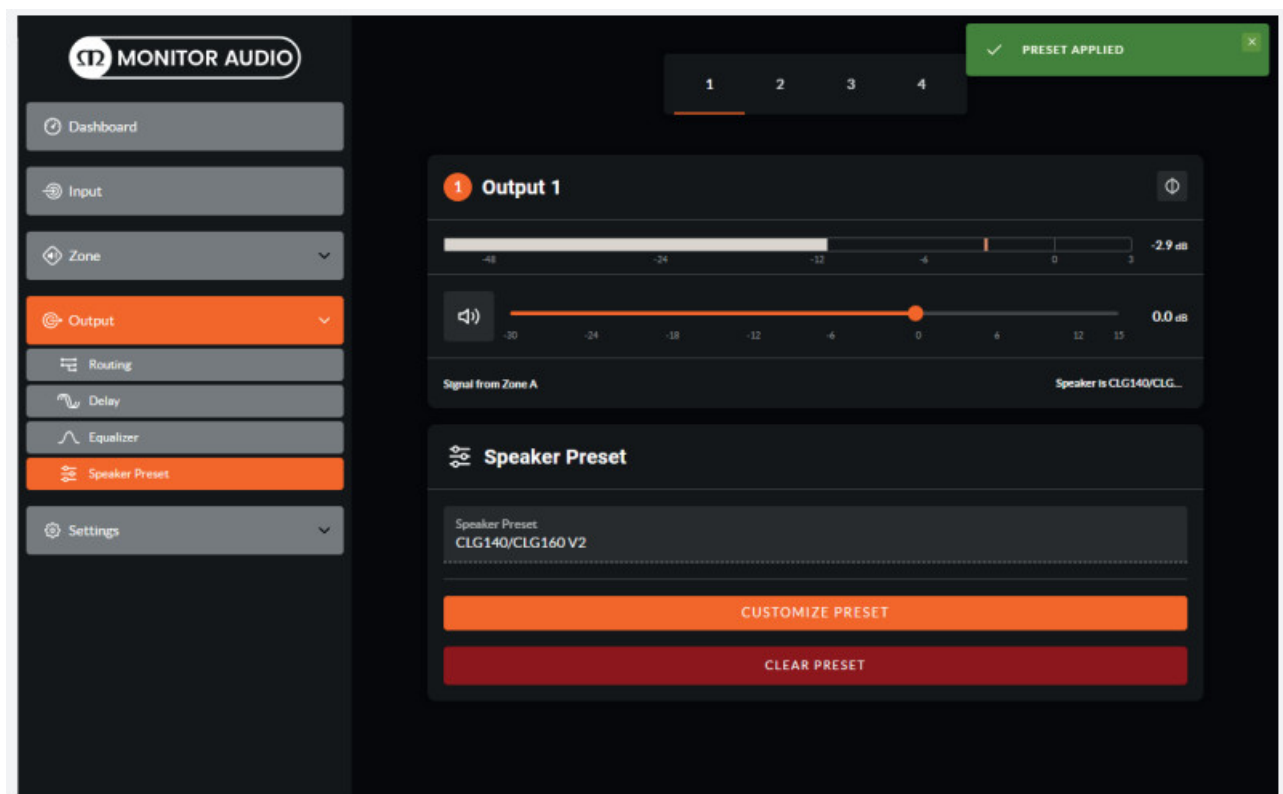

2. Click on "Output Mode" and the re-select "Hi-Z 100v"

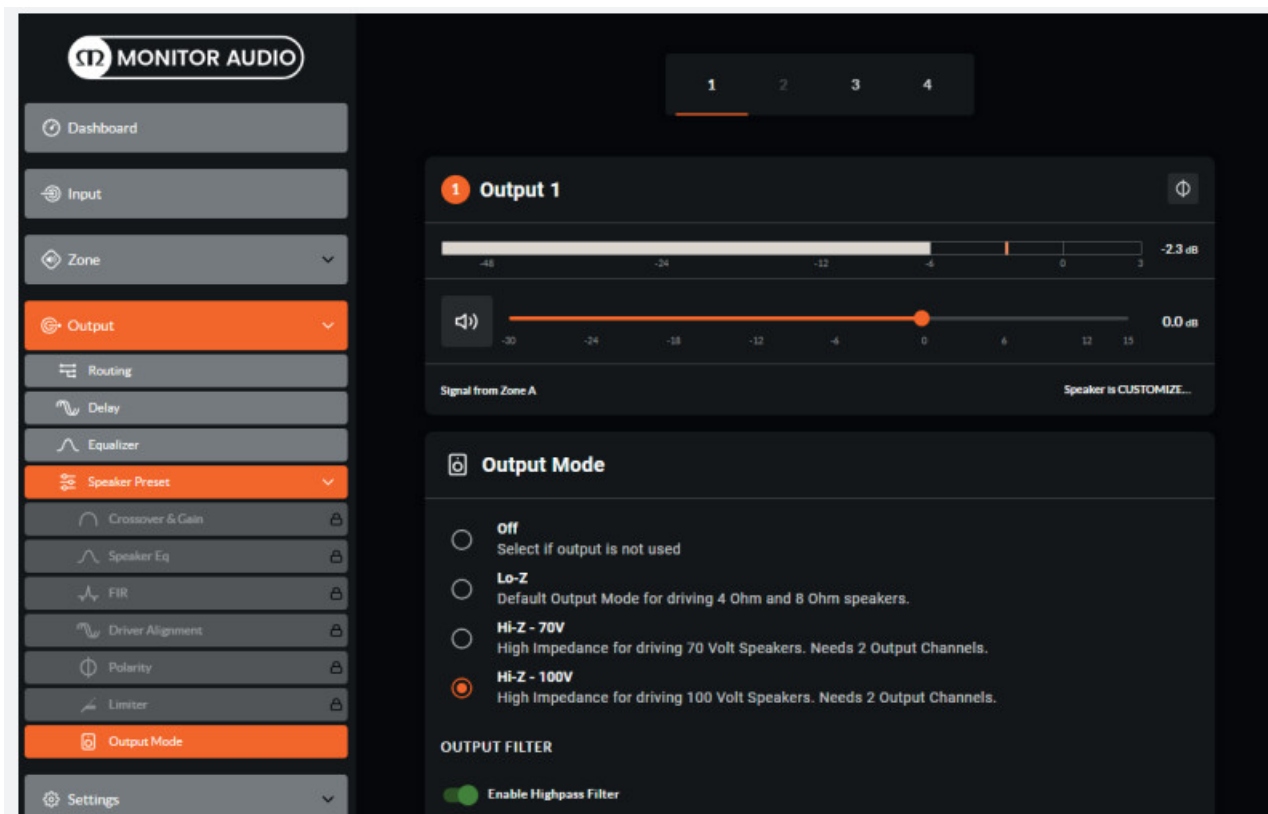

Once the preset has been loaded all routing of the signal can be done along with any other customization.

IMPORTANT: For the Cinergy Sub15 to meet THX requirements, it must be used with our preset profile.


Monitor Audio Ltd.
24 Brook Road
Rayleigh, Essex
SS6 7XJ
England

Tel: +44 (0)1268 740580


Email: technical@monitoraudio.group
monitoraudio.com

©Monitor Audio Ltd. | V1-2023 – M-3-06-006

Listen Again.

 Read me, keep me or recycle me

Documents / Resources

| | |
|---|--|
|  | <p>MONITOR AUDIO TB 06 In Ceiling Speaker Music Streaming System [pdf] Instruction Manual</p> <p>TB 06 In Ceiling Speaker Music Streaming System, TB 06, In Ceiling Speaker Music Streaming System, Ceiling Speaker Music Streaming System, Speaker Music Streaming System, Music Streaming System, Streaming System, System</p> |
|---|--|

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)