



# MONOGRAM ZTSX1DSSNSS 30 Inch Built-In Single Oven Instruction Manual

[Home](#) » [MONOGRAM](#) » MONOGRAM ZTSX1DSSNSS 30 Inch Built-In Single Oven Instruction Manual 



**MONOGRAM 30" BUILT-IN SINGLE OVEN  
ZTSX1DSSNSS**



## Contents

- [1 ZTSX1DSSNSS 30 Inch Built-In Single Oven](#)
- [2 SPECIFICATIONS](#)
- [3 ATTENTION ELECTRICIAN:](#)
- [4 OVERALL DIMENSIONS](#)
- [5 WALL INSTALLATION](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)

## ZTSX1DSSNSS 30 Inch Built-In Single Oven

### THE MONOGRAM MINIMALIST COLLECTION

Streamlined design and precisely machined metals create a contemporary yet functional aesthetic

#### LCD CONTROLS

Allow you to adjust oven settings with little effort

#### WIFI CONNECT

Perfectly in sync with a busy lifestyle, Alexa or Google Home can be used to control an array of oven functions from both inside and outside the home

#### VOICE CONTROL

Sleek handle-less design now benefits from the convenience of voice control. Once programmed, you can use your voice to open the oven door, preheat the oven and more, all without raising a finger

#### NO-PREHEAT AIR FRY

A must-have for health-conscious cooks, the No-Preheat Air Fry mode crisps food to crunchy perfection, without using oils or butter

## **PRECISION COOKING MODES**

Master new recipes and perfectly execute favorite dishes using this ultra-smart system that automatically tracks cooking progress, modifies temperatures and adjusts cook times

### **SCAN-TO-COOK**

Innovative and time saving, scan-to-cook technology ensures that packaged foods are always prepared correctly. A simple scan of the barcode with a smartphone delivers consistently, delicious results For questions about your appliance, please call 1-800-626-2000.

### **TWIN CONVECTION WITH DIRECT AIR**

Achieve beautifully cooked and delicious meals every time with this expertly designed, third heating element and fan combination

### **5.0 CUBIC FOOT CAPACITY**

Easily accommodates even the largest meals

### **EXCLUSIVE SELF-CLEAN, (2 FULL-EXTENSION, 1 REGULAR) OVEN RACKS**

Glide in and out smoothly on stainless steel ball bearings, and are designed to be left in the oven during the self-clean cycle

### **TEN-PASS BAKE ELEMENT**

Covers more surface area for more even baking results

### **EIGHT-PASS BROIL ELEMENT**

Provides complete coverage and even browning, even for large dishes

### **SELF-CLEAN WITH STEAM CLEAN OPTION**

Gives you flexible options for thorough oven cleaning

### **PUSH-TO-OPEN DOOR**

Handle-free, push-to-open door adds a touch of elegant simplicity and stylish convenience to your wall oven.



## **SPECIFICATIONS**


Overall Width	29 3/4" (75.6 cm)
Overall Height	28 11/16" (72.8 cm)
Overall Depth	24 11/16" (62.7cm)
Oven Door Clearance	20 9/16" (52.2 cm)
Overall Oven Interior Capacity	5.0 cu. ft. (141.6 liters)
Oven Interior Dimensions (W x H x D)	25" x 17 3/8" x 20 1/4" (63.5 x 44.1 x 51.4 cm)
Minimum Cabinet Width*	30" (76.2 cm)
Minimum Cabinet Depth*	24" (61.0 cm)
Minimum Base Support	220 lbs. (99 kg)
Cutout Width*	28 1/2" (72.4 cm) Min 28 5/8" (72.7 cm) Max
Cutout Height*	27 1/4" (69.2 cm) Min 27 5/16" (69.4 cm) Max
Cutout Depth*	23 1/2" (59.7 cm) Min
Volts/Hertz/Amps	240/208 V AC, 60 Hz, 20A
Conduit Length	48" (72" available special order: WB18T10398)
Electrical Rating	3.4 kW at 208V 4.5 kW at 240V
Shipping Weight	184 lbs. (84 kg)

\* Additional space will be needed for flush installation.

## ATTENTION ELECTRICIAN:


A 240/208V, 60Hz, 20 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

## OVERALL DIMENSIONS

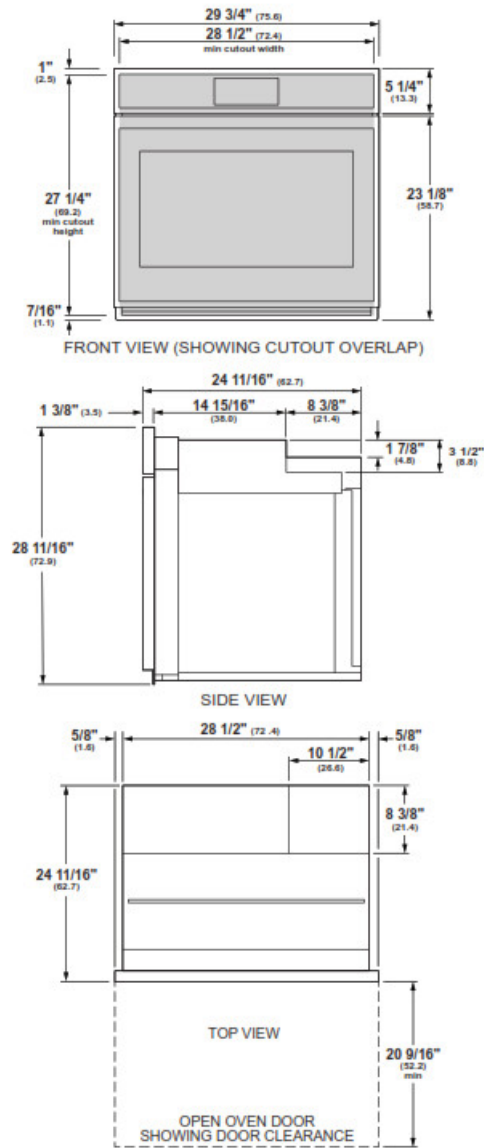

Dimensions in parentheses are in centimeters unless otherwise noted.  
Actual product dimensions may vary due to manufacturing tolerances.

## WALL INSTALLATION

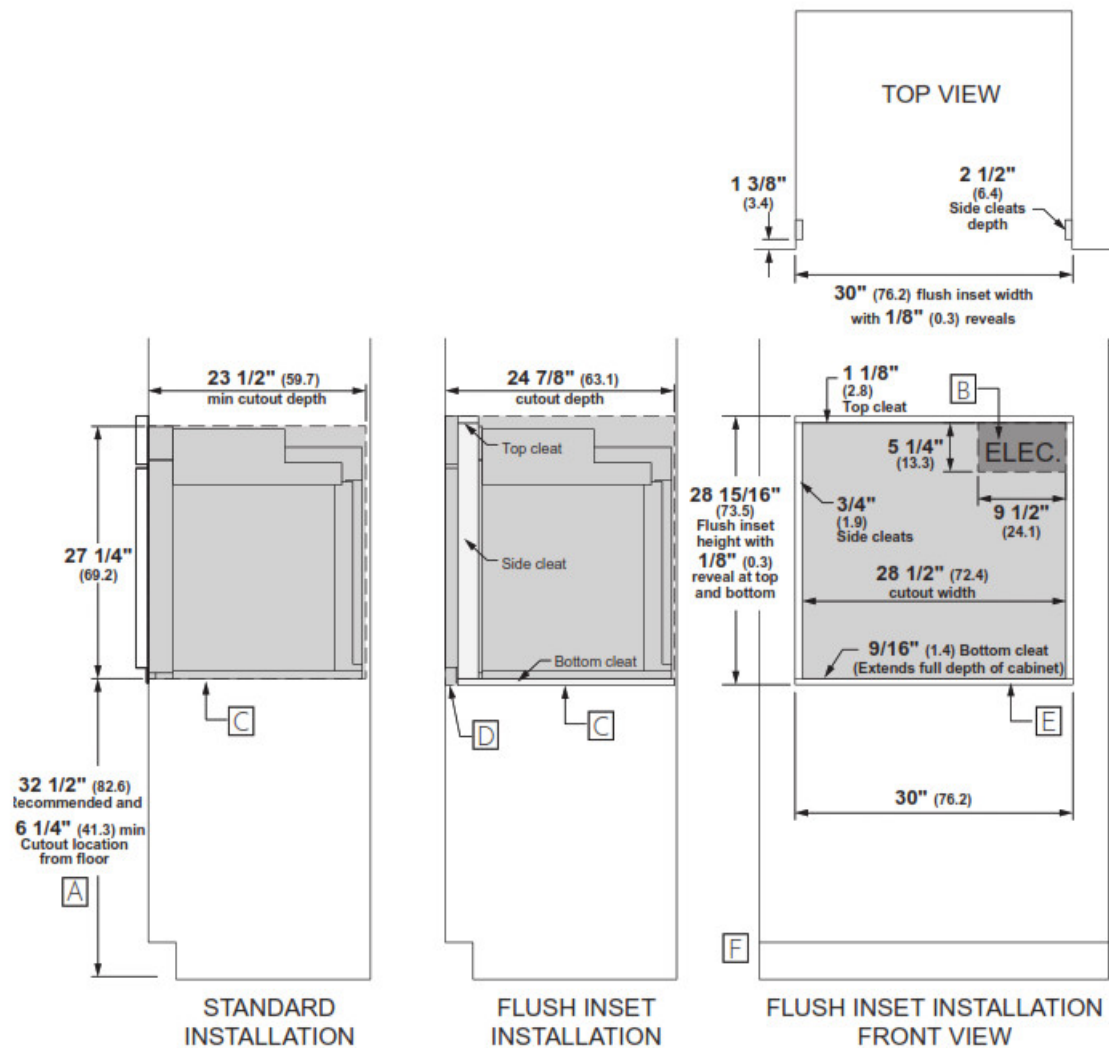

Allow 1/8" (0.3) clearances from side edges of oven door.

## HELPFUL TIPS

A Based on a user height of 5' 6" to 5' 10" Min. cutout 16.25

B Junction box location (May also be located in adjacent cabinet.)


C Platform must be able to support 220 lbs (99 kg)

D Cabinet surfaces must be an appearance finished surface for flush installation.


E Cleats may be visible and should be finished to match cabinetry.

F If using optional flush install vent trim accessory ZX30VT1, please adjust cutout height to 28-5/8" and bottom cleat height to 1/4".

## INSTALLATION WITH ADVANTIUM AND WARMING DRAWER

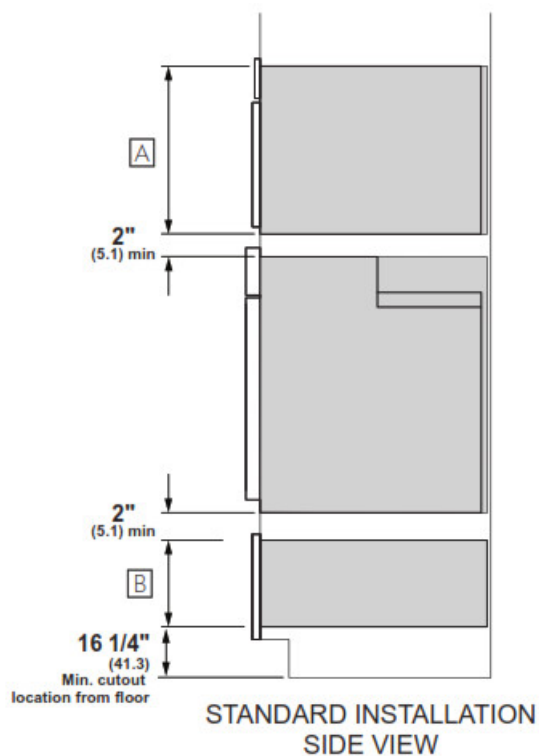

## SIDE BY SIDE INSTALLATION

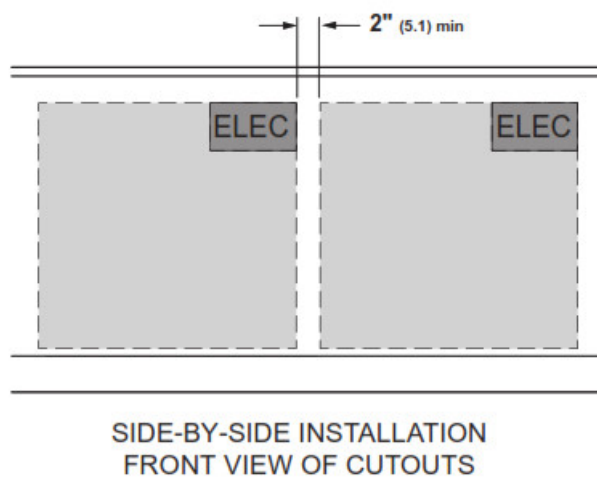

## HELPFUL TIPS


- A Dimensions per Advantium or Microwave Oven requirements
- B Dimension per Warming Drawer requirements

For more details, refer to the installation instructions for this product on [Monogram.com](https://www.monogram.com).

Dimensions in parentheses are in centimeters unless otherwise noted.

For questions about your appliance, please call 1-800-626-2000.

## Documents / Resources

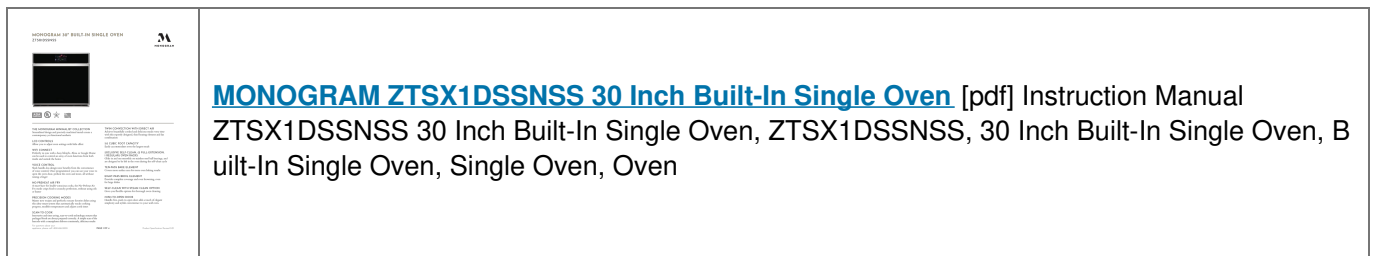

Manuals+,