


MONOKEI STND-87 MacOS Hotkeys Keyboard User Manual

Home » MONOKEI » MONOKEI STND-87 MacOS Hotkeys Keyboard User Manual



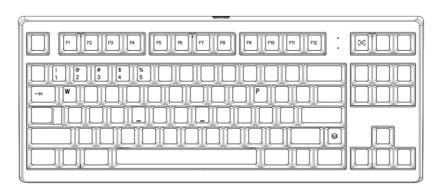

Press \(\bigsize \text{ with any of these keys:} \)

F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12	Decrease Display Brightness Increase Display Brightness Mission Control Spotlight Search Dictation Do Not Disturb Previous Track Play and Pause Next Track Volume Mute Volume Down Volume Up	© → × P 1 ~ ~ 4 5	Take a Screenshot Reset Device (hold for 10s) Switch to Windows layout (hold for 2s) Initiate Pairing Switch to Device 1 (hold for 0.5s) Switch to Device 2 (hold for 0.5s) Switch to Device 3 (hold for 0.5s) Switch to Device 4 (hold for 0.5s) Switch to Device 5 (hold for 0.5s)
---	--	-------------------	--

Caution

Model STND-87

Battery

Do not quick charge the keyboard. Voltage tolerance should not be beyond 5V.

Small Parts

Keycaps and other small objects could be swallowed

Operating temperature:0 - 45°C Rated voltage:

1166 DOW (300mA)

FCC

Federal Communications Commission (FCC) Statement FCC ID: 24703201

15.21 You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the users authority to operate the equipment.

15.105(0) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful Interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- · Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio in/ technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. this device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation of the device.

FCC RF Radiation Exposure Statement: The product complies with the FCC portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. Further RF exposure reduction can be achieved if the product can be kept as far as possible from the user's body or set the device to lower output power if such a function is available.

IMDA

Compiles with IMDA Standards ponccoop0000000d

- 4.2 As an alternative to affixing the compliance label in the manner specified in section 4.1 above, a licensee may implement electronic compliance labeling subject to its compliance with section 4.3 below. Electronic compliance labeling may be implemented by displaying the compliance label on the equipment's built-in display screen or by including the compliance label in the equipment softcopy instruction manual.
- 4.3 Where the licensee elects to use the electronic compliance labeling method, the licensee shall provide an instruction guide or leaflet in the packaging accompanying the registered equipment describing the method which it has adopted to display the compliance label and provide clear instructions on how consumers may locate the electronic compliance label for their own verification.

The marking information is located at the bottom of the apparatus.



Contents

1 Documents / Resources
2 Related Posts

Documents / Resources



Manuals+