

MOSITOECO

MST-F244A
Remote Control



MOSITOECO MST-F244A Remote Control Instructions

[Home](#) » [MOSITOECO](#) » MOSITOECO MST-F244A Remote Control Instructions 

Contents

- [1 MOSITOECO MST-F244A Remote Control](#)
- [2 Specifications](#)
- [3 Usage Instructions](#)
- [4 Operation Guide](#)
- [5 Frequently Asked Questions](#)
- [6 FCC statement](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)



MOSITOECO MST-F244A Remote Control










Specifications

- **CCT.ON/OFF:** Color Temperature Control switch
- **RGB.ON/OFF:** RGB Color Control switch
- **B+:** Increase Brightness
- **B-:** Decrease Brightness
- **WW:** Warm White Light
- **CW:** Cool White Light


Usage Instructions

1. **CCT Control:** Use the CCT ON/OFF switch to control color temperature.
2. **RGB Control:** Utilize the RGB ON/OFF switch to control RGB colors.
3. **Brightness Adjustment:** Press B+ to increase brightness and B- to decrease brightness.
4. **Light Modes:** Switch between Warm White Light (WW) and Cool White Light (CW) by short pressing the corresponding buttons.
5. **Device Switching:** Short press to switch between devices, long press to pair devices.
6. **Night Light Mode:** Activate night light mode for a subtle lighting effect.
7. **Magic Mode:** Experience the magic mode for dynamic lighting effects.
8. **Automatic Shutdown:** The lights will automatically turn off after three minutes in certain modes.
9. **Full Color Mode:** Enter full color mode for a vibrant lighting experience.
10. **Multicolor Switch:** Use this feature to switch between multiple colors.


- 1、CCT.ON/OFF : CCT switch
- 2、RGB.ON/OFF: RGB_switch
- 3、B+ :Brightness +
- 4、B- :Brightness -
- 5、WW: Warm white light
- 6、CW : COOL white light
- 7、: Short press to switch devices, long press to pair
- 8、: Night light
- 9、:Magic mode
- 10、.Three minutes to turn off the lights
- 11、:Full color mode
- 12、:Multicolor switch

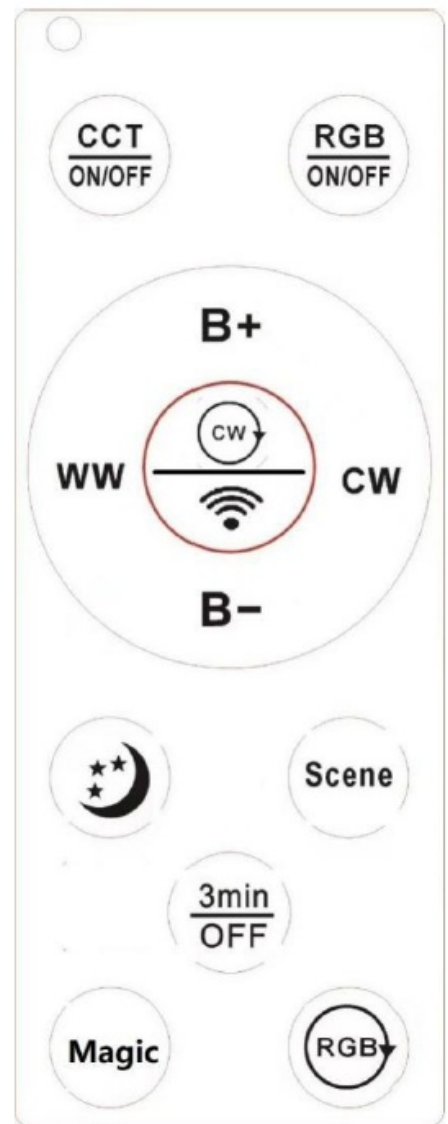



Operation Guide

 **Remote Control and Lamp Pairing:** Power on the lamp and long press for 3-30 seconds, then press for 3 seconds.

After 5 seconds, the lamp will indicate successful pairing. To unpair, long press at any time simultaneously.

 + **B-** **Remote Control Release:** Press the + button for 3 seconds to release control between the remote and light.

 +  **Reset WiFi:** If paired, power on the lamp for 3 to 5 seconds and hold down + for 3 seconds. The lamp will flash into WiFi distribution network mode.

Frequently Asked Questions

How do I pair the remote control with the lamp?

To pair the remote control with the lamp, power on the lamp and long press for 3-30 seconds, then press for 3 seconds. The lamp will indicate successful pairing after 5 seconds.

How can I reset the WiFi connection?

If the lamp and remote control are paired, power on the lamp for 3 to 5 seconds and hold down the + button for 3 seconds. The lamp will enter WiFi distribution network mode.

FCC statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- 1) This device may not cause interference.
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Documents / Resources

	<p>MOSITOECO MST-F244A Remote Control [pdf] Instructions MST-F244A, MST-F244A Remote Control, Remote Control, Control</p>
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.