



MRS 1.037 Motor  
Controllers 5 A  
CAN



# MRS 1.037 Motor Controllers 5 A CAN Instruction Manual

[Home](#) » [MRS](#) » MRS 1.037 Motor Controllers 5 A CAN Instruction Manual 

## Contents

- [1 MRS 1.037 Motor Controllers 5 A CAN](#)
- [2 User Information](#)
- [3 INFORMATION](#)
- [4 Safety](#)
- [5 Product Description](#)
- [6 Assembly](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)



**MRS 1.037 Motor Controllers 5 A CAN**



## Specifications

- **Product:** Motor Controllers
- **Types:**
  - 1.037 Motor Controller 5 A CAN
  - 1.117 Motor Controller 10 A CAN
  - 1.117.9 Motor Controller 7.5 A CAN DTM
  - 1.122 4-in-1 Motor Controller
  - 1.123 Motor Controller 10 A CAN PRO
  - 1.162 Motor Controller 3CH 10 A
  - 1.180 Motor Controller 5 A CAN 32-bit

## Product Description

The Motor Controllers are designed for various applications with different current ratings and communication protocols. They are manufactured by MRS Electronic GmbH & Co. KG in Germany.

## Transport and Storage

When transporting or storing the Motor Controllers, ensure that they are properly secured to prevent any damage. Store them in a cool, dry place away from direct sunlight and moisture to maintain optimal performance.

## FAQ

### **Q: Can the Motor Controllers be used outside the European Economic Area (EEA)?**

A: The products are developed according to European norms and standards, limiting their current use to the EEA. Market access research should be conducted before using the products in other regions.

## User Information

### **About These Operating Instructions**

The manufacturer MRS Electronic GmbH & Co. KG (hereinafter referred to as MRS) delivered this product to you in its entirety and functionally sound. The instruction manual provide information about how to:

- Install the product
- Service the product (cleaning)

- Uninstall the product
- Dispose of the product

It is essential to read these operating instructions thoroughly and completely before working with the product. We strive to compile all the information for safe and complete operation. However, should you have any questions not answered by these instructions, please contact MRS.

### **Storage and transfer of the operating instructions**

These instructions as well as all other product-related documentation relevant for different applications must always be kept on hand and be available in the vicinity of the product.

### **Target group of the operating instructions**

These instructions address trained experts who are familiar with handling electronic assemblies. Trained experts are those persons who can assess the tasks assigned to her/him and recognize possible dangers due to her/his expert training, knowledge and experience as well as her/his knowledge of the relevant standards and regulations.

### **Validity of the operating instructions**

The validity of these instructions goes into effect with the transfer of the product from MRS to the operator. The version number and approval date of the instructions are included in the footer. Changes to these operating instructions are possible any time and without the specification of any reasons.

## **INFORMATION**

The current version of the operating instructions replaces all previous versions.

### **Warning information in the operating instructions**

The operating instructions contain warning information before a call to action which includes the risk of property damage or personal injury. The measures for averting risks described in the instructions must be implemented. Warning information is structured as follows:

### **DANGER!**

### **SOURCE AND CONSEQUENCE**

Plus explanation, where needed.  
Prevention.

- Warning symbol: (Warning triangle) indicates the danger.
- Signal word: Specifies the seriousness of the danger.
- Source: Designates the type or source of the danger.
- Consequence: Specifies the consequences in case of noncompliance.
- Prevention: Informs how to avert the danger.

### **Warning information in the operating instructions**

The operating instructions contain warning information before a call to action which includes the risk of property damage or personal injury. The measures for averting risks described in the instructions must be implemented. Warning information is structured as follows:

### **DANGER!**

### **SOURCE AND CONSEQUENCE**

Plus explanation, where needed.

## **Prevention.**

- Warning symbol: (Warning triangle) indicates the danger.
- Signal word: Specifies the seriousness of the danger.
- Source: Designates the type or source of the danger.
- Consequence: Specifies the consequences in case of noncompliance.
- Prevention: Informs how to avert the danger.

## **Copyright**

These operating instructions contain information protected by copyright. The contents or excerpts of the contents may not be copied or reproduced in any other way without prior consent from the manufacturer.

## **Warranty Conditions**

See the General Terms and Conditions MRS Electronic GmbH & Co. KG at <https://www.mrs-electronic.com/en/terms>

## **Safety**

This chapter includes all the information you should know in order to safely install and operate the product.

## **Hazards**

- The motor controllers have been constructed with the newest technology and recognized safety-relevant regulations. Danger for persons and/or property may arise in case of improper use. Lack of compliance with the rules for work safety may result in damages. This section describes all the possible hazards which may be relevant during the assembly, installation and commissioning of the control unit.

## **Faulty operations**

Faulty software, circuits or parameter setting may cause unforeseen reactions or malfunctions through the complete system.

## **WARNING!**

### **DANGER DUE TO MALFUNCTION OF THE COMPLETE SYSTEM**

Unforeseen reactions or malfunctions of the complete system may endanger the safety of people and machine. Please make sure that the control unit is equipped with the proper software and that the circuits and parameter settings are compliant with the hardware.

## **Moving components**

The complete system may create unforeseen dangers when commissioning and servicing the control unit.

## **WARNING!**

### **SUDDEN MOVEMENTS OF COMPLETE SYSTEM OR OF COMPONENTS**

Danger due to unprotected moving components.

- Before performing any work, shut down the complete system and secure it against unintended restart.
- Before commissioning the system, please make sure that the complete system and all parts of the system are in a safe state.

## **Touching of contacts and pins**

**WARNING!****DANGER DUE TO MISSING PROTECTION OF TOUCHING!**

The protection of touching contacts and pins must be ensured.

Use the watertight socket including supplied protection caps (for modules 1.117 and 1.180), the socket (for modules 1.037 and 1.123), the corrugated tube and protection cap (for module 1.162), or the supplied seals (for module 1.117.9), respectively, as per the accessories list in the data sheet to ensure contact protection for contacts and pins.

Non-compliance with IP protection class

**WARNING!****DANGER DUE TO NON-COMPLIANCE WITH THE IP PROTECTION CLASS!**

Compliance with the IP protection class specified in the data sheet must be ensured.

Use the watertight socket including supplied protection caps (for modules 1.117 and 1.180), the corrugated tube and protection cap (for module 1.162), or the supplied seals (for module 1.117.9), respectively, as per the accessories list in the data sheet to ensure compliance with the IP protection class specified in the data sheet.

**Elevated temperature****CAUTION!****DANGER OF BURNS!**

The casing of the control unit may exhibit an elevated temperature.

Please do not touch the casing and let all system components cool down before working on the system.

**Staff Qualifications**

These operating instructions repeatedly refer to the qualifications of the employees who can be trusted to perform various tasks for installation and maintenance. The three groups are:

- Specialists/Experts
- Skilled persons
- Authorized persons

This product is not suitable for use by persons (incl. children) who are mentally or physically disabled or do not have enough experience or sufficient knowledge of the product unless supervised or having attended a detailed training regarding the use of the control unit by a person who is responsible for the safety of this person.

**Specialists/Experts**

Specialists and experts are, for example, fitters or electrician who are capable of assuming different tasks, such as transport, assembly and installation of the product with the instructions of an authorized person. The people in question must be experienced in handling the product.

**Skilled persons**

Skilled persons are those persons who have sufficient knowledge of the subject in question due to their specialist training and are familiar with the relevant national occupational protection provisions, accident prevention regulations, guidelines and generally recognized rules of technology. Skilled persons must be capable of securely assessing the results of their work and familiarize themselves with the contents of these operating instructions.

**Authorized persons**

Authorized persons are those persons who are permitted to perform the work due to legal regulations or who have been approved to perform certain tasks by MRS.

**Obligations of the Manufacturer of Complete Systems**

- Tasks for system development, installation and commissioning of electric systems may only be performed by trained and experienced staff, see Chapter 2.2 Staff Qualifications.
- The manufacturer of the complete system must ensure that no defective or faulty control units are used. In case of failure or malfunctions, the control unit must be replaced immediately.
- The manufacturer of the complete system must ensure that the circuitry and programming of the control unit do not lead to a safety-relevant malfunction of the complete system in case of a failure or malfunction.
- The manufacturer of the complete system is responsible for the correct connection of all the peripherals (such as cable profiles, protection against touching, plugs, crimps, correct selection/connection of sensors/actuators).
- The control unit may not be opened.
- No changes and/or repairs may be performed on the control unit.
- If the control unit falls down, it may no longer be used and must be returned to MRS to be checked.
- The manufacturer of the complete system must inform the end customer about all potential dangers.
- The manufacturer must also take the following aspects into consideration when using the control unit:
- Control units with wiring suggestions provided by MRS do not constitute a systematic responsibility for complete systems.
- Safe operation cannot be guaranteed for control units used as prototypes or samples in the complete system.
- Faulty circuitry and programming of the control unit may lead to unforeseen signals to the outputs of the control unit.
- Faulty programming or parameter setting of the control unit may lead to dangers during operation of the complete system.
- It must be ensured when the control unit is released that the supply of the electric system, of the final stages and of the external sensor supply are shut down jointly.
- Control units without factory-made software programmed more than 500 times may not be used in complete systems any longer.
- The risk of accidents is reduced if the manufacturer of the complete systems observes the following points:
- Adherence to the statutory regulations regarding accident prevention, occupational safety and environmental protection.
- Provision of all documents required for installation and maintenance
- Monitoring of the cleanliness of the control unit and of the complete system.
- The responsibilities for the assembly of the control unit must be clearly specified by the manufacturer of the complete system. The assembly and maintenance staff must be regularly instructed.
- Any work and maintenance performed on electric energy sources is always associated with possible dangers. Persons not familiar with these kinds of devices and systems may cause harm to themselves and others.
- The installation and maintenance staff of a system with electric devices must be instructed by the manufacturer regarding potential dangers, required safety measures and applicable safety provisions before beginning work.

## **Product Description**

The motor controllers by MRS Electronic are microcontroller-controlled modules that are used to control one or multiple small electric motors.

The software tool CANgraph and the suitable flash programming tool MRS Developers Studio or programming with a C-programming system are used for graphic programming.

## **Transport and Storage**

## 1. Transport

The product must be packed in suitable transport packaging and secured against sliding around. During transport, the statutory provisions regarding securing loads must be observed.

If the control unit falls down, it may no longer be used and must be returned to MRS to be checked.

## 2. Storage

Store the product in a dry place (no dew), dark (no direct sunlight) in a clean room which can be locked. Please observe the permissible environmental conditions in the data sheet.

### **Intended Use**

The control unit is used to control one or multiple small electro motors in vehicles and selfpropelled work machines and may only be used for this purpose.

### **You are within regulations**

- If the control unit is operated within the operating ranges specified and approved in the corresponding data sheet.
- If you strictly adhere to the information and sequence of tasks described in these operating instructions and do not engage in unauthorized actions which may risk your safety and the functionality of the control unit.
- If you comply with all specified safety instructions.

### **WARNING!**

#### **DANGER DUE TO UNINTENDED USE!**

The control unit is only intended to be used in vehicles and self-propelled work machines.

- An application in safety-relevant system parts for functional safety is not permitted.
- Please do not use the control unit in explosive areas.

### **Misuse**

- Use of the product in conditions and requirements differing from those specified by the manufacturer in technical documentation, data sheets and operating instructions.
- Non-compliance with the safety information and information regarding assembly, commissioning, maintenance and disposal specified in the operating instructions.
- Conversions and changes of the control unit.
- Use of the control unit or parts thereof which are damaged or corroded. The same goes for seals and cables.
- Operation in a condition with access to live parts.
- Operation without the safety measures intended and provided by the manufacturer.
- MRS only guarantees/is liable for the control unit corresponding to the published specifications. If the product is used in a way not described in these operation instructions or in the data sheet of the control unit in question, the protection of the control unit will be impaired, and the warranty claim is void.

### **Assembly**

Assembly work may only be performed by qualified staff (see Chapter 2.2 Staff Qualifications). The control unit may only be operated after having installed in a fixed location.

## **INFORMATION**

If the control unit falls down, it may no longer be used and must be returned to MRS to be checked.

### **Mounting Location**

The mounting location must be selected as such that the control unit is subjected to as low a mechanical and thermal load as possible. The control unit may not be exposed to chemicals.

## **INFORMATION**

Please observe the permissible environmental conditions in the data sheet.

### **Mounting Position**

Mount the control unit in such a way that the connectors point downwards. This ensures that possible condensation water can flow off. Individual seals of the cables/wires ensure that no water can enter the control unit. Compliance with the IP protection class and protection against touching must be ensured by using the appropriate accessories in accordance with the accessories list in the data sheet.

### **Fastening**

Control unit with flat plugs (pursuant to ISO 7588-1: 1998-09)

Control units with flat plugs are plugged into the plugs provided by the manufacturer of the complete system.

Please observe the instructions in Chapter 7 Electric Installation and Wiring.

### **Control unit with fastening straps**

The control unit must be screwed to the complete system at both side fastening straps. The selection of the connecting elements, securing the connections and the torque are determined by the manufacturer of the complete system. Please observe the specified hole distance in the data sheet.

## **Electric Installation and Wiring**

### **Electric Installation**

Electric installation work may only be performed by qualified staff (see Chapter 2.2 Staff Qualifications). The electric installation of the unit may only be performed in idle condition. The control unit may never be connected or disconnected on-load or when live.

## **WARNING!**

### **SUDDEN MOVEMENTS OF COMPLETE SYSTEM OR OF COMPONENTS**

Danger due to unprotected moving components.

- Before performing any work, shut down the complete system and secure it against unintended restart.
- Please make sure that the complete system and all parts of the system are in a safe state.
- Please ensure that the control unit is connected correctly. Check the pin assignment.
- Please pay attention to the safety instructions in the data sheet/operating instructions of the motors.

### **Control unit with flat plugs (pursuant to ISO 7588-1: 1998-09)**

1. Please ensure that the control unit is inserted into the correct slot. Follow the connection diagram and documents of the complete system.
2. Please ensure that all flat plugs of the control unit are free of dirt and moisture.
3. Please ensure that the slot does not exhibit any damages due to overheating, insulation damages and corrosion.



4. Please ensure that all sockets of the control unit are free of dirt and moisture.
5. If the control unit is used in a vibrating environment, the control unit must be secured by a latch to prevent it from shaking loose.
6. Plug the control unit vertically all the way into the slot.

The commissioning process can now be performed, see Chapter 8 Commissioning.

### **Control unit with plug connectors**

1. Please ensure that the correct cable harness is connected to the control unit. Follow the connection diagram and documents of the complete system.
2. Please ensure that the mating plug of the cable harness (not included) is compatible.
3. Please ensure that the control unit is free of dirt and moisture.
4. Please ensure that the mate plug of the cable harness (not included) does not exhibit any damages due to overheating, insulation damages and corrosion.
5. Please ensure that the mating plug of the cable harness (not included) is free of dirt and moisture.
6. Connect the plug connector until the locking catch latches or the locking mechanism (optional) can be actuated.
7. Lock the plug or ensure that the grommet (optional) of the mating plug is fully attached.
8. If the control unit is used in a vibrating environment, the control unit must be secured by a latch to prevent it from shaking loose.
9. Close the open pins with blind plugs to prevent liquids from entering.

The commissioning process can now be performed, see Chapter 8 Commissioning.

### **Module 1.162**

To comply with the IP protection class, the wiring harness attached to the mating connector must be routed through the corrugated tube and the mating connector must be connected to the control unit. The protection cap is then closed over the mating connector and the corrugated tube.

### **Wiring**

#### **INFORMATION**

Always use an external fuse in the power supply line to protect the device against overvoltage. For further information about the correct fuse rating, please refer to the corresponding data sheet.

- The wiring must be connected with the utmost diligence.
- All cables and the way they are laid must comply with applicable regulations.
- The connected cables must be suitable for temperatures min. 10 °C above the max. permitted environmental temperature.
- The cables must comply with the requirements and wire cross-sections specified in the technical data.
- When laying cables, the possibility of mechanical damages of the wire insulation on sharp edges or moving metal parts must be excluded.
- Cables must be laid so they are strain-relieved and friction-free.
- The cable routing must be selected in such a way that the cable harness only moves identically to the direction of movement of the controller/plug. (Attachment controller/cable/strain relief on the same underground). A strain relief is necessary (see Figure 1 and Figure 2).

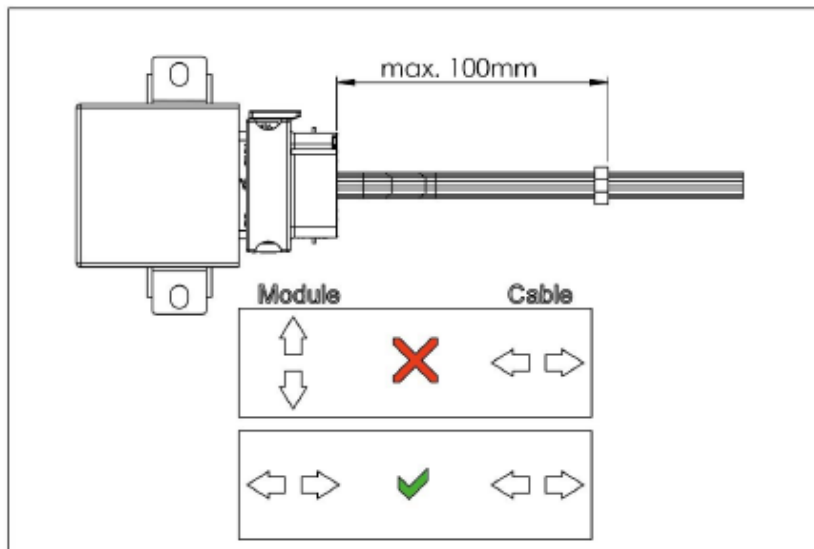


Figure 1: Strain relief of the cable harness (example). 100 mm (max.) are mandatory, control unit may vary.

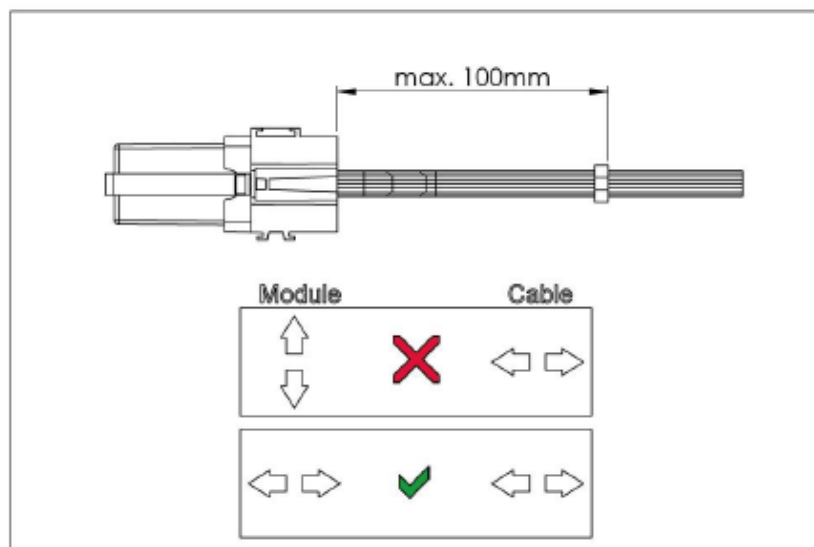


Figure 2: Strain relief of the cable harness (example). 100 mm (max.) are mandatory, control unit may vary.

## Commissioning

Commissioning work may only be performed by qualified staff (see Chapter 2.2 Staff Qualifications). The unit may only be commissioned if the condition of the complete system complies with the applicable guidelines and regulations.

## INFORMATION

MRS recommends a functional test on site.

## WARNING!

SUDDEN MOVEMENTS OF COMPLETE SYSTEM OR OF COMPONENTS

Danger due to unprotected moving components.

- Before commissioning the system, please make sure that the complete system and all parts of the system are in a safe state.
- If necessary, secure all hazard areas with barrier tapes.

**The operator must ensure that**

- the correct software has been embedded and corresponds with the circuitry and parameter setting of the hardware (only for control units supplied by MRS without software).
- no persons are present in the vicinity of the complete system.
- the complete system is in a safe state.
- commissioning is performed in a safe environment (horizontal and solid ground, no weather impact).

### **Software**

The installation and/or replacement of device firmware / software must be performed by MRS Electronic GmbH & Co. KG or by an authorized partner in order for the warranty to remain valid.

### **INFORMATION**

Control units supplied without software can be programmed using MRS Developers Studio.

- More information available in the MRS Developers Studio manual.

### **HINWEIS**

To prevent damage to the hardware when switching the motor on and off, a ramp function should be used, e.g. via the "Ramp" graphical programming block. The description for this can be found in the Developers Studio.

- More information available in the MRS Developers Studio manual.

### **Fault Removal and Maintenance**

#### **INFORMATION**

- The control unit is maintenance-free and may not be opened.
- If the control unit exhibits any damages on the casing, locking catch, seals or flat plugs, it must be shut down.
- Fault removal and cleaning work may only be performed by qualified staff (see Chapter 2.2
- Staff Qualifications). Fault removal and cleaning work may only be performed in idle condition.
- Remove the control unit for fault removal and cleaning. The control unit may never be connected or disconnected on-load or when live. After fault removal and cleaning work has been completed, please follow the instructions in Chapter 7 Electric Installation.

### **WARNING!**

#### **SUDDEN MOVEMENTS OF COMPLETE SYSTEM OR OF COMPONENTS**

- Danger due to unprotected moving components.
- Before performing any work, shut down the complete system and secure it against unintended restart.
- Before beginning fault removal and maintenance work, please make sure that the complete system and all parts of the system are in a safe state.
- Remove the control unit for fault removal and cleaning.

### **CAUTION!**

#### **DANGER OF BURNS!**

The casing of the control unit may exhibit an elevated temperature.

- Please do not touch the casing and let all system components cool down before working on the system.

**CAUTION!****DAMAGE OR SYSTEM FAILURE DUE TO IMPROPER CLEANING!**

The control unit may be damaged due to improper cleaning processes and cause unintended reactions throughout the complete system.

- The control unit should not be cleaned with a high-pressure cleaner or a steam jet.
- Remove the control unit for fault removal and cleaning.

**Cleaning****INFORMATION**

Damages due to improper cleaning agents!

- The control unit may be damaged when cleaning it with high-pressure cleaners, steam jets, aggressive solvents or scouring agents.
- Do not clean the control unit with high-pressure cleaners or steam jets. Do not use any aggressive solvents or scouring agents.
- Only clean the control unit in a clean environment free of dust.

1. Please follow all safety instructions and deenergize the complete system.
2. Do not use any aggressive solvents or scouring agents.
3. Let the control unit dry.

Install the clean control unit pursuant to the instructions in Chapter 7 Electric Installation.

**Fault Removal**

1. Please ensure that fault removal measures are performed in a safe environment (horizontal and solid ground, no weather impact)
2. Please follow all safety instructions and deenergize the complete system.
3. Check that the system is intact.

Remove damaged control unit and dispose of in accordance with national environmental regulations.

4. Remove the mate plug and/or remove the control unit from the slot.
5. Check all flat plugs, connectors and pins for mechanical damages due to overheating, insulation damage and corrosion.
  - Damaged control units and control units with corroded contacts must be removed and disposed of in accordance with national environmental regulations.
  - Dry control unit and contacts in case of moisture.
  - If needed, clean all contacts.

**Faulty operations**

In case of faulty operations, check the software, circuitry and parameter settings.

**Disassembly and Disposal**

## Disassembly

Disassembly and disposal may only be performed by qualified staff (see Chapter 2.2 Staff Qualifications). Disassembly of the unit may only be performed in idle condition.

## WARNING!

### SUDDEN MOVEMENTS OF COMPLETE SYSTEM OR OF COMPONENTS

Danger due to unprotected moving components.

- Before performing any work, shut down the complete system and secure it against unintended restart.
- Before disassembling the system, please make sure that the complete system and all parts of the system are in a safe state.

## CAUTION!

### DANGER OF BURNS!

The casing of the control unit may exhibit an elevated temperature.

Please do not touch the casing and let all system components cool down before working on the system.

Control unit with flat plugs (pursuant to ISO 7588-1: 1998-09)

1. Gently unplug the control unit vertically from the slot.


## Control unit with plug connectors

1. Unlock the lock and/or the locking catch of the mate plug.
2. Gently remove the mate plug.
3. Loosen all screw connections and remove the control unit.




## Disposal

Once the product is disused, it must be disposed of in accordance with the national environmental regulations for vehicles and work machines

## Documents / Resources

 <p>Operating Instructions</p> <p>1.037, 1.117, 1.117.9, 1.122, 1.123, 1.162, 1.180, 1.037 Motor Controllers 5 A CAN, 1.037, Mot or Controllers 5 A CAN, Controllers 5 A CAN</p>	<p><b><a href="#">MRS 1.037 Motor Controllers 5 A CAN</a></b> [pdf] Instruction Manual</p> <p>1.037, 1.117, 1.117.9, 1.122, 1.123, 1.162, 1.180, 1.037 Motor Controllers 5 A CAN, 1.037, Mot or Controllers 5 A CAN, Controllers 5 A CAN</p>
---	--

## References

-  [electronic.com is for sale | www.oxley.com](http://www.oxley.com)
-  [electronic.com is for sale | www.oxley.com](http://www.oxley.com)
-  [Startseite - MRS Electronic, Ihr starker Partner für Steuerungen, Gateways und Relais.](#)
- [User Manual](#)

